

# MTL4532 – MTL5532

## PULSE ISOLATOR

pulse & 4/20mA current outputs

The MTLx532 isolates pulses from a switch, proximity detector, current pulse transmitter or voltage pulse transmitter located in a hazardous area. It is ideal for applications involving high pulse rates and fast response times, by repeating the pulses into the safe area. An analogue output proportional to frequency is also provided, together with a relay output, which may be configured to act as an alarm. Configuration is carried out with a personal computer.

### SPECIFICATION

See also common specification

#### Number of channels

One, fully floating

#### Sensor type

Switch or proximity detector (NAMUR/BS EN 60947-5-6:2001)  
2- or 3-wire voltage or pulse transmitter

#### Location of switch

Zone 0, IIC, T6 hazardous area  
Div. 1, Group A, hazardous location

#### Location of proximity detector or transmitter

Zone 0, IIC, T4-T6 if suitably certified  
Div.1, Group A, hazardous location

#### Input

Switch input:  
Output ON if switch is closed  
Proximity detector input:  
Excitation: 7.0 to 9.0V dc from 1kΩ nominal  
Output ON if input > 2.1mA\* (< 2kΩ)  
Output OFF if input < 1.2mA\* (> 10kΩ)  
Switching hysteresis: 0.2mA (650Ω) nominal  
\*NAMUR and BS EN 60947-5-6:2001 standards  
Current pulse input:  
Transmitter supply: 16.5V dc at 20mA  
Short circuit current: 24mA  
Output:  $I_{in} > 9.0\text{mA} = \text{ON}$ ,  $I_{in} < 7.0\text{mA} = \text{OFF}$   
Switching hysteresis: 0.5mA  
Voltage pulse input  
Input impedance: > 10kΩ  
Switching point voltage ( $V_{sp}$ ): 3, 6, or 12V nominal  
(User selectable by switches on the side of the module)  
Output:  $V_{in} > V_{sp} = \text{ON}$ ,  $V_{in} < V_{sp} = \text{OFF}$   
Switching hysteresis: 100mV + (0.1 x  $V_{sp}$ ) typical

#### Safe-area pulse output

Maximum delay: 10μs  
Maximum off-state voltage: 35V  
Maximum off-state leakage current: 10μA  
Maximum on-state resistance: 25Ω  
Maximum on-state current: 50mA  
Output OFF if supply fails  
*Note: LFD signal is Zener-diode protected against inductive loads*


#### Safe-area current output

Input capture delay: 2 signal periods (5ms min.)  
Signal range: 4 to 20mA  
Under/over range: 0 to 22mA  
Load resistance: 0 to 450Ω @20mA  
Output resistance: >1MΩ  
Ripple: < 50μA peak-to-peak  
Accuracy: better than 20μA at 20°C  
Temperature drift: < 1μA/°C  
Risetime (10% - 90%, after step change): 60 ms


#### Alarm output

Relay ON in alarm, 0.5A @ 35Vdc max.

### MTL4532

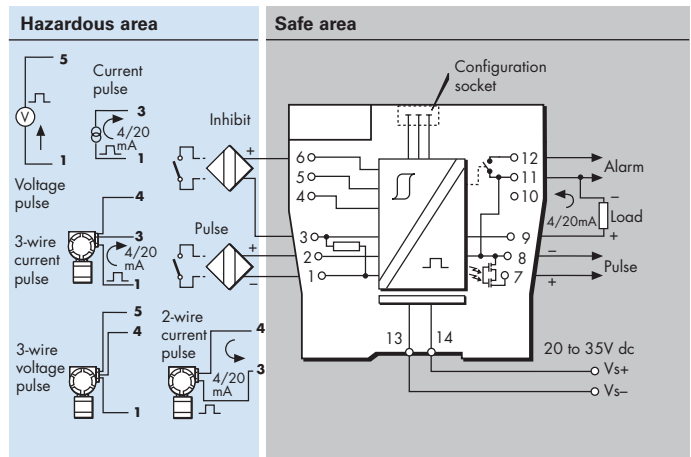

### MTL5532

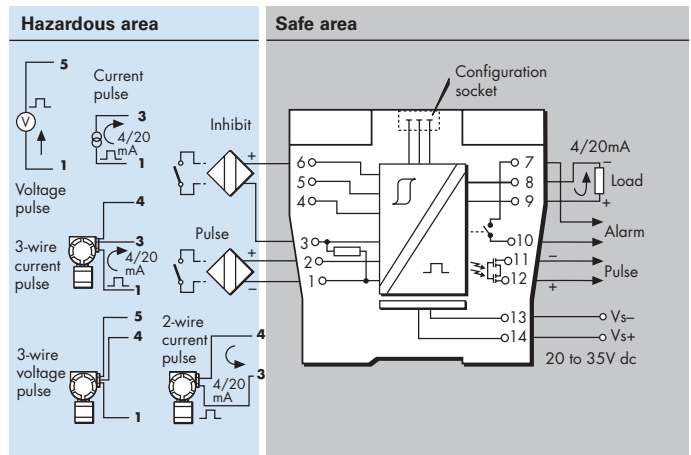

#### Pulse width

High: 10μs min  
Low: 10μs min

#### Frequency range

0 - 50kHz - pulse output mode  
0 - 10KHz - for analogue output

#### LED indicators

Green: power indication  
Yellow: on when output circuit is on  
Red: flashing when line fault or error

#### Power requirement

65mA at 24V dc  
70mA at 20V dc  
55mA at 35V dc

#### Power dissipation within unit

1.35W maximum at 24V  
1.75W maximum at 35V

#### Safety description ( $U_m = 253\text{V rms or dc}$ )

Terminals 2 to 1 and 6 to 1  
 $U_o=10.5\text{V}$   $I_o=14\text{mA}$   $P_o=37\text{mW}$   
Terminals 4 to 3 and 1  
 $U_o=28\text{V}$   $I_o=93\text{mA}$   $P_o=651\text{mW}$   
Terminals 3 to 1  
Non-energy-storing apparatus  $\leq 1.5\text{V}$ ,  $\leq 0.1\text{A}$  and  $\leq 25\text{mW}$ ; can be connected without further certification into any IS loop with an open-circuit voltage <28V  
Terminals 5 to 4 and 1  
 $V_{max} \leq 28\text{V}$ ,  $I_{max} \leq 94\text{mA}$ ,  $P_{max} \leq 0.66\text{W}$

#### Configurator

A personal computer running MTL PCS45 software with a PCL45USB serial interface.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee.  
In the interest of further technical developments, we reserve the right to make design changes.



Powering Business Worldwide

Eaton Electric Limited,  
Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.  
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
E-mail: mtlenquiry@eaton.com  
www.mtl-inst.com

© 2016 Eaton  
All Rights Reserved  
Publication No.  
EPSx532 Rev5 010916

EUROPE (EMEA):  
+44 (0)1582 723633 mtlenquiry@eaton.com  
THE AMERICAS:  
+1 800 835 7075 mtl-us-info@eaton.com  
ASIA-PACIFIC:  
+65 6 645 9888 sales.mtlsing@eaton.com