

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

QUINT INVERTER, DIN rail mounting, input:24 V DC, output:1AC / 600 VA, Pure sine.



Your advantages

- Manual selection of AC output voltage via signal terminal enables worldwide use
- Pure sine curve at the output
- USB interface for connecting to industrial PCs, for example
- Can be switched in parallel for various applications
- Space savings, thanks to the compact design

Commercial Data

Item number	1067325
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	CMII45
GTIN	4055626737003
Weight per Piece (including packing)	2,834 g
Weight per Piece (excluding packing)	2,490 g
Customs tariff number	85044084
Country of origin	DE

Technical Data

Input data

Input voltage	24 V DC
Input voltage range DC	20 V DC ... 30 V DC
Current consumption	typ. 23 A
	max. 28 A

Signal Remote

Connection labeling	3.8
Signalization designation	Remote
Low signal	Connection to SGnd with < 2.7 k Ω
High signal	Open (> 35 k Ω between Remote and SGnd)

Signal Start 230V

Connection labeling	3.6
Signalization designation	Start 230V
Low signal	Connection to SGnd with < 2.7 k Ω
High signal	Open (> 200 k Ω between Start and SGnd)

Signal Start 120V

Connection labeling	3.7
Signalization designation	Start 120V
Low signal	Connection to SGnd with < 2.7 k Ω
High signal	Open (> 200 k Ω between Start and SGnd)

Output data

Efficiency	> 86 % (120 V AC)
	> 87 % (230 V AC)
Output voltage	120 V AC \pm 2 % (100 V AC / 6 A...130 V AC / 4,6 A)
	230 V AC \pm 2 % (200 V AC / 3 A...240 V / 2,5 A)
Form of output voltage	Pure sine
Nominal output current (I_N)	5 A (120 V AC)
	2.6 A (230 V AC)
Maximum no-load power dissipation	typ. 21 W (120 V AC)
	typ. 21 W (230 V AC)
Power loss nominal load max.	typ. 72 W (120 V AC)
	typ. 66 W (230 V AC)
Nominal output frequency	60 Hz 50 Hz \pm 0.5 %
Derating	50 °C ... 60 °C (2.5%/K)
Apparent power	600 VA
Real power	480 W
Power factor (cos phi)	0.8
Crest factor	2.8
Total harmonic distortion factor (THD)	< 3 % (linear load)

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

	< 8 % (non-linear load)
Connection in parallel	yes
Connection in parallel	max. 3
Connection in series	No
Overload capacity Mains operation	105 % (Permanent)
	120 % ... 150 % (20 s / 5 s, then shutdown)
Electronic current limitation	> 2,5 x I _N (> 200 ms)

Signal AC OK

Connection labeling	3.2
Signalization designation	AC OK
Type of signaling	Green LED
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA
LED status indicator	green

Signal Alarm

Connection labeling	3.1
Signalization designation	Alarm
Type of signaling	LED red
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA
LED status indicator	red

Signal DC OK

Connection labeling	3.3
Signalization designation	DC OK
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA
LED status indicator	green

Signal Parallel run

Connection labeling	3.5
Signalization designation	Parallel run
Switching output	Transistor output, active
Continuous load current	≤ 20 mA

Signal P>P_n

Connection labeling	3.4
Signalization designation	P>P _n
Switching output	Transistor output, active
Continuous load current	≤ 20 mA
LED status indicator	green

1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Signal ground SGnd

Connection labeling	3.9
Function	Signal ground
Reference potential	For signal inputs and signal outputs

Connection data

Input

Position	1.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 6 mm ²
flexible	0.2 mm ² ... 4 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 4 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 4 mm ²
rigid (AWG)	30 ... 10
Stripping length	8 mm
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Output

Position	2.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 6 mm ²
flexible	0.2 mm ² ... 4 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 4 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 4 mm ²
rigid (AWG)	30 ... 10
Stripping length	8 mm
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Signal

Position	3.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm ² ... 1.5 mm ²
flexible	0.2 mm ² ... 1.5 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 1.5 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 1.5 mm ²
rigid (AWG)	30 ... 12
Stripping length	8 mm

1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Interfaces

Interface	USB (Modbus/RTU)
Number of interfaces	1
Connection method	MINI-USB Type B
Connection marking	5.1
Locking	Screw
Transmission physics	USB 2.0
Features	lockable
Maximum cable length	3 m
Electrical isolation	yes
Interface	Parallel Port
Number of interfaces	1
Connection method	RJ45
Connection marking	5.2
Locking	Locking clip
Electrical isolation	yes

Electrical properties

Number of phases	1.00
------------------	------

Product properties

Product type	DC/AC inverters
	QUINT INVERTER
MTBF (IEC 61709, SN 29500)	532525 h (40 °C)

Insulation characteristics

Protection class	I
Degree of pollution	2

Dimensions

Width	180 mm
Height	130 mm
Depth	125 mm

Installation dimensions

Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

Material specifications

Housing material	Metal
------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (> 50 °C: 2,5 % / K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 3000 m (> 2000 m: 0,6 % / 100 m)
Max. permissible relative humidity (operation)	≤ 95 %
Shock	20g in all directions (EN 60068-2-27)
Vibration (operation)	5 Hz ... 100 Hz, 0.7g (EN 60068-2-6)

Standards and regulations

Overvoltage category

EN 61010-2-201	II
----------------	----

Approval data

UL

Identification	UL/C-UL Recognized UL 1778
----------------	----------------------------

UL

Identification	UL/C-UL Listed UL 61010-1
----------------	---------------------------

UL

Identification	UL/C-UL Listed UL 61010-2-201
----------------	-------------------------------

EMC data

Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Conducted noise emission	EN 61000-6-4
Interference emission	Noise emission in accordance with EN 61000-6-4
Noise immunity	Immunity in accordance with EN 61000-6-2

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV
Discharge in air	± 8 kV
Comments	Criterion A

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 6 GHz
Test field strength	10 V/m

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB




1067325

<https://www.phoenixcontact.com/pc/products/1067325>


Comments	Criterion A
Fast transients (burst)	
Standards/regulations	EN 61000-4-4
Fast transients (burst)	
Input	± 2 kV
Output	± 2 kV
Signal	± 2 kV ± 2 kV (USB)
Comments	Criterion A (B for USB)
Surge voltage load (surge)	
Standards/regulations	EN 61000-4-5
Input	± 1 kV (symmetrical) ± 2 kV (asymmetrical)
Output	± 2 kV (symmetrical) ± 4 kV (asymmetrical)
Signal	1 kV (asymmetrical)
Comments	Criterion A
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Frequency range	0.15 MHz ... 80 MHz
Signal	10 V
Comments	Criterion A
Power frequency magnetic field	
Standards/regulations	EN 61000-4-8
Frequency	50 Hz 60 Hz
Signal	30 A/m
Comments	Criterion A
Criteria	
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

Drawings

Diagram

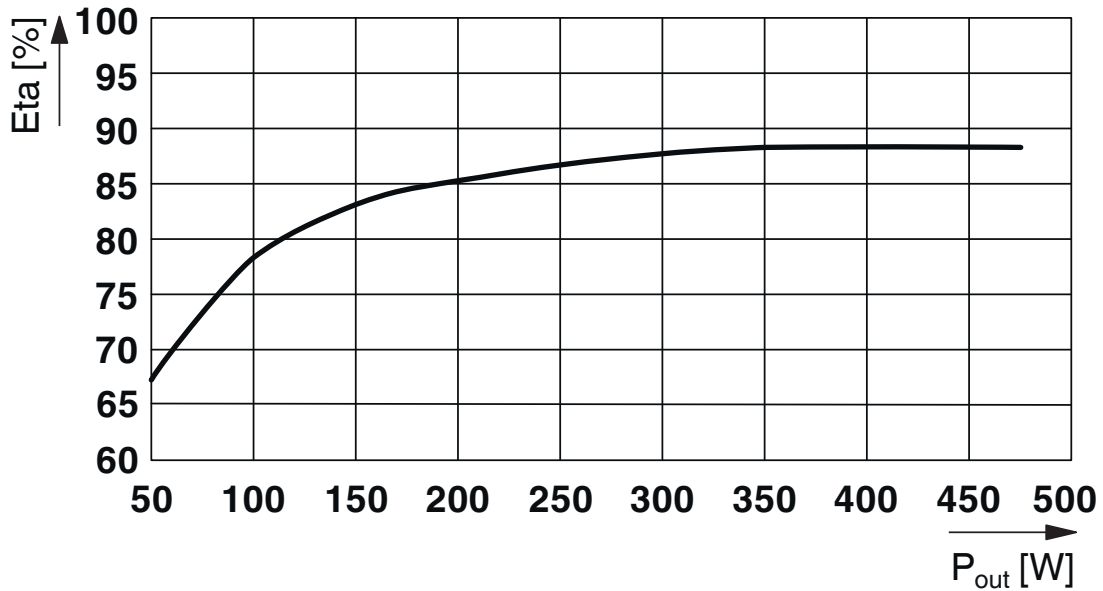

Block diagram

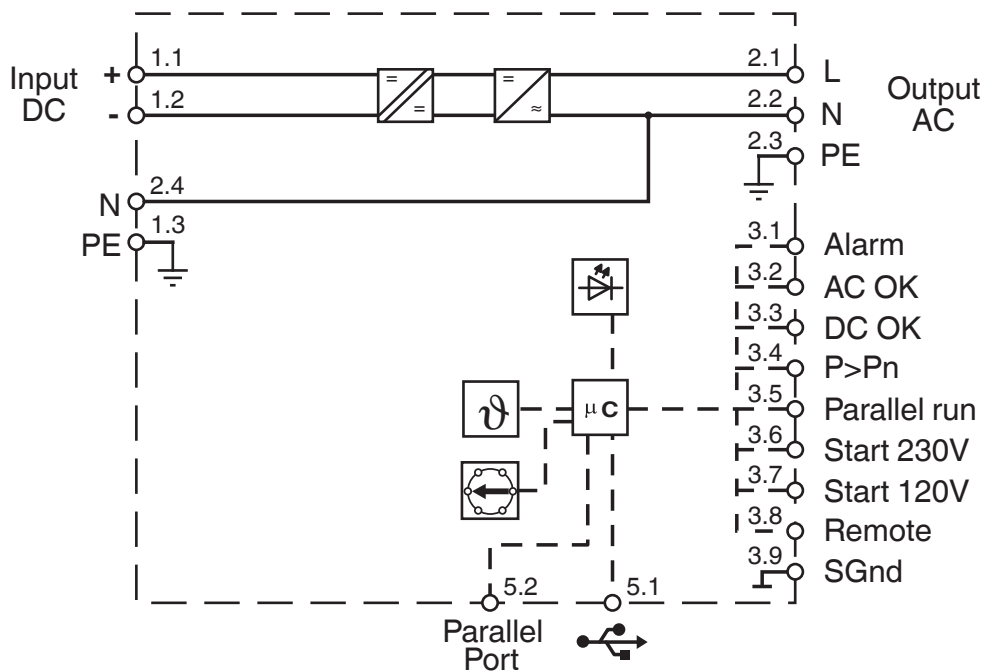

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Approvals



IECEE CB Scheme

Approval ID: DK-95874-M1-UL



cULus Recognized

Approval ID: FILE E 342453



cULus Recognized

Approval ID: FILE E 123528



EAC

Approval ID: RU S-DE.BL08.W.00764



cUL Recognized

Approval ID: FILE E 359066



UL Recognized

Approval ID: FILE E 359066

cULus Recognized

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Classifications

ECLASS

ECLASS-9.0	27024390
ECLASS-10.0.1	27024390
ECLASS-11.0	27040202

ETIM

ETIM 8.0	EC001747
----------	----------

UNSPSC

UNSPSC 21.0	32121700
-------------	----------

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Accessories

Adapter

Adapter - RJ45-PORT-BRIDGE/3XPARALLEL - 1205351

<https://www.phoenixcontact.com/pc/products/1205351>



Passive RJ45 distributor with three female connectors connected in parallel and optional functional grounding

Data cable

Data cable - MINI-SCREW-USB-DATACABLE - 2908217

<https://www.phoenixcontact.com/pc/products/2908217>



Used for communication between an industrial PC and Phoenix Contact devices with USB-Mini-B connection.

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Mounting adapter

Mounting adapter - UWA 130 - 2901664

<https://www.phoenixcontact.com/pc/products/2901664>



2-piece universal wall adapter for securely mounting the device in the event of strong vibrations. The profiles that are screwed onto the side of the device are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

Mounting adapter

Mounting adapter - UWA 182/52 - 2938235

<https://www.phoenixcontact.com/pc/products/2938235>



Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-120-FM-UT - 2907918

<https://www.phoenixcontact.com/pc/products/2907918>



Type 2/3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 120 V AC/DC

Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-230-FM-UT - 2907919

<https://www.phoenixcontact.com/pc/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

DC/AC inverter - QUINT4-INV/24DC/1AC/600VA/USB



1067325

<https://www.phoenixcontact.com/pc/products/1067325>

Configuration software

Configuration software - POWER MANAGEMENT SUITE - 1252232

<https://www.phoenixcontact.com/pc/products/1252232>



Configuration and management software

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com