

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



QUINT DC UPS, IQ Technology, RS485, DIN rail mounting, Screw connection, input: 24 V DC, output: 24 V DC / 10 A, charging current: 3 A

Product description

The intelligent QUINT UPS for integration into established industrial networks: your systems continue to be supplied with uninterrupted power, even in the event of a mains failure. The battery management system with IQ Technology and a powerful battery charger ensures superior system availability.

Your advantages

- Easy integration into networks using PROFINET, EtherNet/IP, EtherCAT® and USB interfaces
- Evaluation of state of health (SOH) and state of charge (SOC), thanks to the intelligent battery management system (BMS)
- Automatic recognition of the battery capacities and technologies (VRLA-WTR, LI-ION)
- Monitoring of output current and voltage, as well as manual connection and disconnection of the system
- SFB Technology selectively trips standard miniature circuit breakers. Loads connected in parallel continue working.

Commercial data

Item number	1322768
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CMUI43
GTIN	4063151611064
Weight per piece (including packing)	504 g
Weight per piece (excluding packing)	456 g
Country of origin	Country of origin will be provided upon delivery.

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Technical data

Input data

Input voltage	24 V DC
Input voltage range	18 V DC ... 30 V DC
Electric strength, max.	35 V DC (Protected against polarity reversal)
Internal input fuse	no
Typical national grid voltage	24 V DC
Voltage type of supply voltage	DC
Inrush current	$\leq 7 \text{ A}$ ($\leq 4 \text{ ms}$)
Reverse polarity protection	yes
Fixed backup threshold	22 V DC 30 V DC
Dynamic activation threshold	$> 1 \text{ V} / 100 \text{ ms}$
Switch-on time	max. 3 s
Switch-on time during battery operation (Bat.-Start)	8 s
Voltage drop, input/output	0.4 V DC
Current consumption I_N (U_N , $I_{OUT} = I_N$, $I_{charge} = 0$)	10.1 A
Current consumption I_{max} (U_N , $I_{OUT} = I_{Stat.Boost}$, $I_{charge} = max$)	16.2 A
Current consumption $I_{No-Load}$ (U_N , $I_{OUT} = 0$, $I_{charge} = 0$)	48 mA
Current consumption I_{charge} (U_N , $I_{OUT} = 0$, $I_{charge} = max$)	3.5 A
Power consumption P_N (U_N , $I_{OUT} = I_N$, $I_{charge} = 0$)	241 W
Power consumption P_{max} (U_N , $I_{OUT} = I_{Stat.Boost}$, $I_{charge} = max$)	384 W
Power consumption $P_{No-Load}$ (U_N , $I_{OUT} = 0$, $I_{charge} = 0$)	1.2 W
Power consumption P_{charge} (U_N , $I_{OUT} = 0$, $I_{charge} = max$)	90 W

Output data

Efficiency	typ. 98 %
Number of outputs	1
Short-circuit-proof	yes
No-load proof	yes
Switch-over time	0 ms
UPS connection in parallel	no
UPS connection in series	no
Energy storage device connection in parallel	Yes, 5 (observe line protection)
Energy storage device connection in series	no

Mains operation

Output voltage	24 V DC ($U_{OUT} = U_{IN} - 0.4 \text{ V DC}$)
Output voltage range	18 V DC ... 30 V DC ($U_{OUT} = U_{IN} - 0.4 \text{ V DC}$) 18 V DC ... 32 V DC
Output current I_N	10 A

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Static Boost ($I_{\text{Stat.Boost}}$)	12.5 A
Dynamic Boost ($I_{\text{Dyn.Boost}}$)	20 A (5 s)
Selective Fuse Breaking (I_{SFB})	60 A (15 ms)
Output power P_{OUT} (U_{N} , $I_{\text{OUT}} = I_{\text{N}}$)	240 W
Output power P_{OUT} (U_{N} , $I_{\text{OUT}} = I_{\text{stat.Boost}}$)	300 W
Output power P_{OUT} (U_{N} , $I_{\text{OUT}} = I_{\text{dyn.Boost}}$)	480 W (5 s)
Power dissipation No load (U_{N} , $I_{\text{Out}} = 0$, $I_{\text{Charge}} = 0$)	3 W
Power dissipation Nominal load (U_{N} , $I_{\text{Out}} = I_{\text{N}}$, $I_{\text{Charge}} = 0$)	8 W

Battery operation

Output voltage	24 V DC ($U_{\text{OUT}} = U_{\text{BAT}} - 0.4 \text{ V DC}$)
Output voltage range	19 V DC ... 28 V DC ($U_{\text{OUT}} = U_{\text{BAT}} - 0.4 \text{ V DC}$)
Output current I_{N}	10 A
Static Boost ($I_{\text{Stat.Boost}}$)	12.5 A
Selective Fuse Breaking (I_{SFB})	60 A (15 ms)
Output power P_{OUT} (U_{N} , $I_{\text{OUT}} = I_{\text{N}}$)	240 W
Output power P_{OUT} (U_{N} , $I_{\text{OUT}} = I_{\text{stat.Boost}}$)	300 W
Output power P_{OUT} (U_{N} , $I_{\text{OUT}} = I_{\text{dyn.Boost}}$)	480 W (5 s)
Power dissipation No load (U_{N} , $I_{\text{Out}} = 0$, $I_{\text{Charge}} = 0$)	2 W
Power dissipation Nominal load (U_{N} , $I_{\text{Out}} = I_{\text{N}}$, $I_{\text{Charge}} = 0$)	8 W

Energy storage

Nominal voltage U_{N}	24 V DC
End-of-charge voltage (temperature-compensated)	25 V DC ... 32 V DC
End-of-charge voltage (configurable)	27.6 V DC
Charging current (configurable)	max. 3 A
Nominal capacity (without additional charger)	1.2 Ah ... 80 Ah
Max. capacity	80 Ah
Charging time	160 min (7.2 Ah)
Buffer time	25 min (7.2 Ah)
Deep discharge protection (configurable)	19.2 V DC
Battery technology	VRLA, VRLA-WTR, LI-ION
Charge characteristic curve	IU_0U
IQ-Technology	yes
Temperature sensor	yes
Temperature compensation (configurable)	42 mV/K

Connection data

Input

Position	1.x
----------	-----

Conductor connection

Connection method	Screw connection
-------------------	------------------

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

rigid	0.2 mm² ... 2.5 mm²
flexible	0.2 mm² ... 2.5 mm²
flexible with ferrule without plastic sleeve	0.2 mm² ... 2.5 mm²
flexible with ferrule with plastic sleeve	0.2 mm² ... 2.5 mm²
rigid (AWG)	30 ... 12 (Cu)
Stripping length	6.5 mm (rigid/flexible)
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Output

Position	2.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm² ... 2.5 mm²
flexible	0.2 mm² ... 2.5 mm²
flexible with ferrule without plastic sleeve	0.2 mm² ... 2.5 mm²
flexible with ferrule with plastic sleeve	0.2 mm² ... 2.5 mm²
rigid (AWG)	30 ... 12 (Cu)
Stripping length	6.5 mm (rigid/flexible)
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Signal

Position	3.x
----------	-----

Conductor connection

Connection method	Push-in connection
rigid	0.2 mm² ... 1 mm²
flexible	0.2 mm² ... 1 mm²
flexible with ferrule without plastic sleeve	0.2 mm² ... 0.75 mm² (Cu) 0.5 mm² (recommended)
flexible with ferrule with plastic sleeve	0.2 mm² ... 0.75 mm²
rigid (AWG)	24 ... 16 (Cu)
Stripping length	8 mm (rigid/flexible)

Battery

Position	4.x
----------	-----

Connection technology

Position marking	4.1 (+), 4.2 (-), 4.3 (⏏  
------------------	--

Conductor connection

Connection method	Screw connection
rigid	0.2 mm² ... 2.5 mm²
flexible	0.2 mm² ... 2.5 mm²

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

flexible with ferrule without plastic sleeve	0.2 mm² ... 2.5 mm²
flexible with ferrule with plastic sleeve	0.2 mm² ... 2.5 mm²
rigid (AWG)	30 ... 12 (Cu)
Stripping length	6.5 mm (rigid/flexible)
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted L

Communication

Position	5.x
----------	-----

Conductor connection

Connection method	Screw connection
rigid	0.2 mm² ... 1 mm²
flexible	0.2 mm² ... 1 mm² 0.5 mm² (recommended)
flexible with ferrule without plastic sleeve	0.2 mm² ... 0.75 mm² (Cu) 0.5 mm² (recommended)
flexible with ferrule with plastic sleeve	0.2 mm² ... 0.75 mm² 0.5 mm² (recommended)
rigid (AWG)	24 ... 16 (Cu)
Stripping length	6.5 mm (rigid/flexible)
Tightening torque	0.5 Nm ... 0.6 Nm
Drive form screw head	Slotted

Interfaces

Interface	RS485
Number of interfaces	1
Connection method	Screw, 3-pole
Supported protocols	Modbus/RTU
Topology	Point-to-point

Signaling

LED signaling

Types of signaling	DC OK (green)
	Alarm (red)
	Bat.-Mode (yellow)
	SOC (red, green)
	Data (red, green)

Signal state Alarm

Connection labeling	3.2, 3.3
Channel	DO (digital output)
Switch contact (floating)	OptoMOS
State (configurable)	Group alarm

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

State condition (configurable)	Alarm threshold
Switching voltage	max. 30 V AC/DC
State - signal assignment	NC (Normally Closed)
Current carrying capacity	max. 100 mA
LED status indicator	red (Alarm)

Signal state Bat.-Mode

Connection labeling	3.4 (+)
Channel	DO (digital output)
Semiconductor output	MOSFET
State (configurable)	Bat.-Mode
State condition (configurable)	$U_{IN} < 18 \text{ V DC}$, $U_{IN} > 30 \text{ V DC}$, Bat.-Start
Output voltage	19 V DC ... 28 V DC (buffered)
Output can be loaded	max. 20 mA
State - signal assignment	active - high
Reference potential	3.9 (SGnd, identical to 1.2, 2.2, 4.2)
LED status indicator	Yellow (Bat.-Mode)

Signal state Ready

Connection labeling	3.5 (+)
Channel	DO (digital output)
Semiconductor output	MOSFET
State (configurable)	Ready
State condition (configurable)	SOC = 100 %
Output voltage	19 V DC ... 28 V DC (buffered)
Output can be loaded	max. 20 mA
State - signal assignment	active - high
Reference potential	3.9 (SGnd, identical to 1.2, 2.2, 4.2)
LED status indicator	Green (state of charge - SOC)

Signal state Remote

Connection labeling	3.6 (+)
Channel	DI (digital input)
State (configurable)	Disconnection
State condition	Low level
Low signal	Input connected with SGnd (3.9) or $\leq 5 \text{ V DC}$
High signal	Input not connected or connected with 13 ... 30 V DC
Signal - state assignment	low - active
Reference potential	3.9 (SGnd, identical to 1.2, 2.2, 4.2)
LED status indicator	Green, flashing (DC OK)

Signal state PS Boost

Connection labeling	3.7 (+)
Channel (configurable)	DI (digital input) default, AI (analog input)

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

State (configurable)	Charging current reduced
State condition	Low level
Low signal	Input connected with SGnd (3.9), <5 V DC or not connected
High signal	Input connected with 13 ... 30 V DC
Signal - state assignment	low - active
Analog	4 mA ... 20 mA (Offset zero point)
Reference potential	3.9 (SGnd, identical to 1.2, 2.2, 4.2)
Unit signal	I (mA)
Resistance	390 Ω

Signal state Bat.-Start

Connection labeling	3.8 (+)
Channel	DI (digital input)
State condition	Low level (30 ms)
Low signal	Input connected with SGnd (3.9) or <u>Bat</u>
High signal	Input not connected or connected with >U _{Bat}
Signal - state assignment	low - active
Reference potential	3.9 (SGnd, identical to 1.2, 2.2, 4.2)
LED status indicator	Yellow (Bat.-Mode)

Signal output 24V DC 20 mA, SGnd

Connection labeling	3.1 (+), 3.9 (SGnd)
Output voltage	24 V DC
Output can be loaded	max. 20 mA
Reference potential	3.9 (SGnd, identical to 1.2, 2.2, 4.2)

Product properties

Product family	QUINT DC UPS
MTBF (IEC 61709, SN 29500)	> 2065000 h (25 °C)
	> 1184000 h (40 °C)
	> 522600 h (60 °C)
Environmental protection directive	RoHS Directive 2011/65/EU
	WEEE
	Reach

Insulation characteristics

Protection class	III (without PE)
Degree of pollution	2

Life expectancy (electrolytic capacitors)

Time	137895 h
------	----------

Dimensions

Item dimensions

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Width	35 mm
Height	138 mm
Depth	132 mm
Depth (Device depth (DIN rail mounting))	125 mm (Device depth (DIN rail mounting))

Item dimensions with alternative mounting

Width	123 mm
Height	130 mm

Installation dimensions

Installation distance right/left (active)	5 mm / 5 mm ($P_{Out} \geq 50\%$)
Installation distance right/left (passive)	0 mm / 0 mm ($P_{Out} \geq 50\%$)
Installation distance right/left (active, passive)	0 mm / 0 mm ($P_{Out} \leq 50\%$)
Installation distance top/bottom (active)	50 mm / 50 mm ($P_{Out} \geq 50\%$)
Installation distance top/bottom (passive)	40 mm / 20 mm ($P_{Out} \geq 50\%$)
Installation distance top/bottom (active, passive)	40 mm / 20 mm ($P_{Out} \leq 50\%$)

Mounting

Mounting type	DIN rail mounting
Mounting position	On horizontal DIN rail NS 35/7.5 and NS 35/15 acc. to EN 60715

Material specifications

Flammability rating according to UL 94 (housing / terminal blocks)	V0
Housing material	Metal
Hood version	Stainless steel X6Cr17
Side element version	Aluminum AlMg3

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (start-up type tested)	-40 °C
Max. permissible relative humidity (operation)	$\leq 95\%$ (at 25 °C, non-condensing)

Standards and regulations

Overvoltage category

EN 61010-1	II (≤ 4000 m)
EN 61010-2-201	II (≤ 4000 m)

Protective extra-low voltage

Standard designation	Protective extra-low voltage
Standards/specifications	IEC 61010-1 (SELV)

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

	IEC 61010-2-201 (PELV)
--	------------------------

Approvals

UL approval

Identification

UL/C-UL Listed UL 61010-1

UL approval

Identification

UL/C-UL Listed UL 61010-2-201

UL approval

Identification

UL/C-UL Listed ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location)

CSA

Identification

CAN/CSA-C22.2 No. 61010-1-12

CSA

Identification

CAN/CSA-IEC 61010-2-201

CSA

Identification

CAN/CSA-C22.2 No. 213 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location)
--

CB scheme

Identification

IEC 61010-1
IEC 61010-2-201

DNV

Identification

Class Guideline DNVGL-CG-0339

Note

Location classes: Temperature D (see Application/Limitation), Humidity B, Vibration A/C, EMC B
--

EMC data

Electromagnetic compatibility

Conformance with EMC Directive 2014/30/EU

Low Voltage Directive

Conformance with Low Voltage Directive 2014/35/EC

EMC requirements for noise emission

EN 61000-6-3

EN 61000-6-4

EMC requirements for noise immunity

EN 61000-6-1

EN 61000-6-2

Noise immunity

Immunity in accordance with EN 61000-6-1 (residential), EN 61000-6-2 (industrial), and EN 61000-6-5 (switching devices), IEC/EN 61850-3 (power supply)
--

Noise emission

Standards/regulations

Additional basic standard EN 61000-6-5 (immunity in switching devices), IEC/EN 61850-3 (power supply)

Electrostatic discharge

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Standards/regulations	EN 61000-4-2
Electrostatic discharge	
Contact discharge	8 kV (Test Level 4)
Discharge in air	15 kV (Test Level 4)
Comments	Criterion B
Electromagnetic HF field	
Standards/regulations	EN 61000-4-3
Electromagnetic HF field	
Frequency range	80 MHz ... 1 GHz
Test field strength	20 V/m (Test Level 3)
Frequency range	1 GHz ... 6 GHz
Test field strength	10 V/m (Test Level 3)
Frequency range	1 GHz ... 6 GHz
Test field strength	10 V/m (Test Level 3)
Comments	Criterion A
Fast transients (burst)	
Standards/regulations	EN 61000-4-4
Fast transients (burst)	
Input	4 kV (Test Level 4 - asymmetrical)
Output	4 kV (Test Level 4 - asymmetrical)
Signal	4 kV (Test Level 4 - asymmetrical)
Comments	Criterion B
Surge voltage load (surge)	
Standards/regulations	EN 61000-4-5
Surge voltage load (surge)	
Input	1 kV (Test Level 3 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Output	1 kV (Test Level 3 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Signal	1 kV (Test Level 2 - asymmetrical)
Comments	Criterion B
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Input/output/signal	asymmetrical
Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V (Test Level 3)

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Power frequency magnetic field


Standards/regulations	EN 61000-4-8
Frequency	16.67 Hz
	50 Hz
	60 Hz
Test field strength	100 A/m
Additional text	60 s
Comments	Criterion A
Frequency	50 Hz
	60 Hz
Frequency range	50 Hz ... 60 Hz
Test field strength	1 kA/m
Additional text	3 s
Frequency	0 Hz
Test field strength	300 A/m
Additional text	DC, 60 s

Criteria


Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

<https://www.phoenixcontact.com/pc/products/1322768>

Block diagram

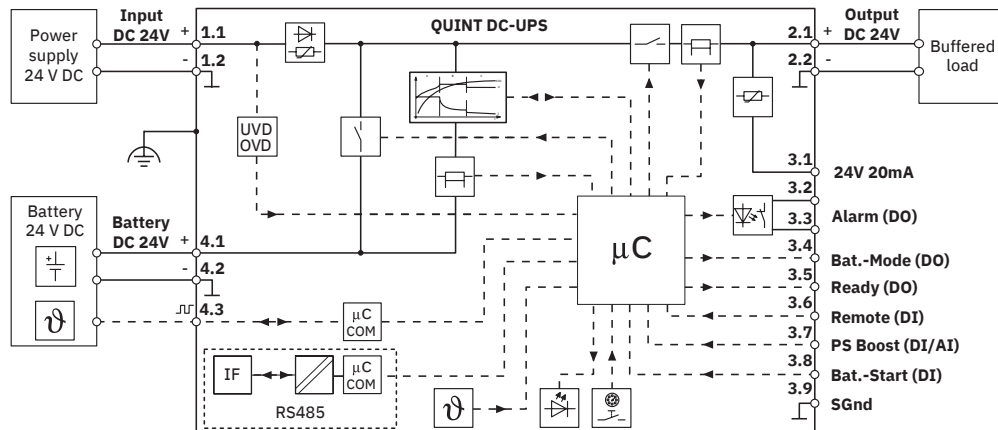

Graphic

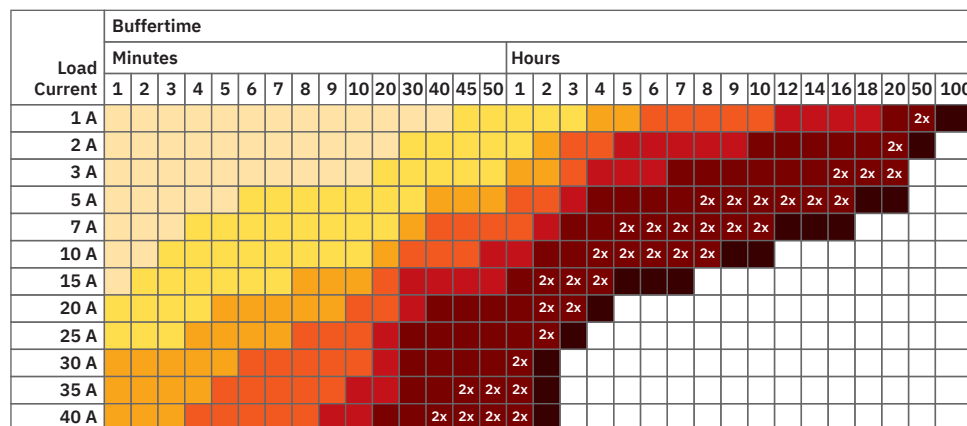

1354641 UPS-BAT/PB/24DC/40AH


Jan 19, 2026, 9:19 AM Page 12 (19)

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768
https://www.phoenixcontact.com/pc/products/1322768

Graphic

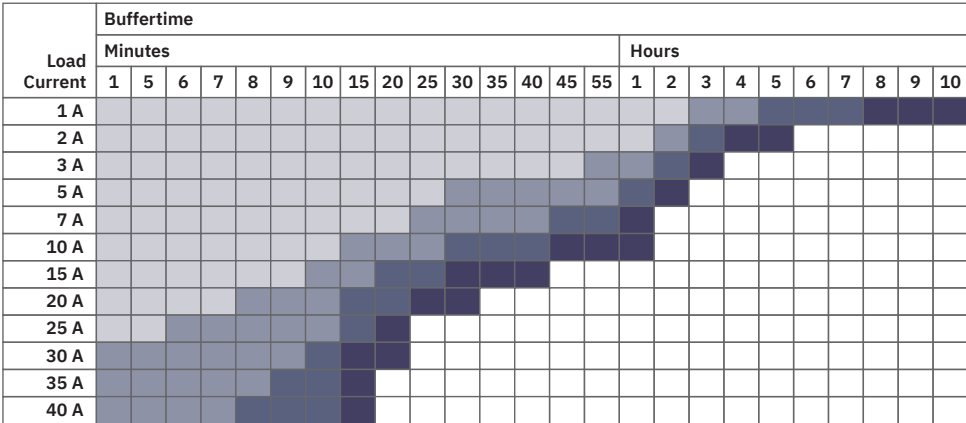

The data is based on an ambient temperature of +25 °C at the start of use.

1460921 UPS-BAT/LI/24DC/64WH


1460922 UPS-BAT/LI/24DC/189WH

1396415 UPS-BAT/LI/24DC/128WH

1460923 UPS-BAT/LI/24DC/284WH

QUINT DC UPS buffer times for LI battery module

Graphic

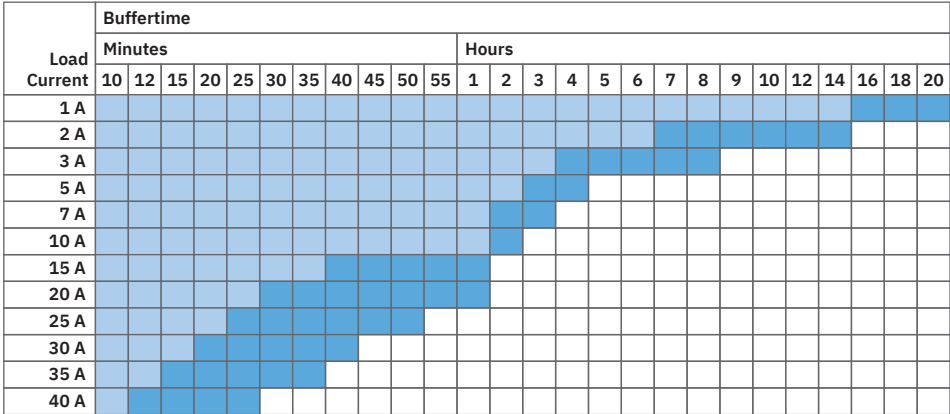

The data is based on an ambient temperature of +25 °C at the start of use.

2320416 UPS-BAT/VRLA-WTR/24DC/13AH

2320429 UPS-BAT/VRLA-WTR/24DC/26AH

QUINT DC UPS buffer times and VRLA-WTR battery module

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768
<https://www.phoenixcontact.com/pc/products/1322768>

Classifications

ECLASS

ECLASS-13.0	27040705
ECLASS-15.0	27040705

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

Mandatory accessories

UPS-BAT/PB/24DC/1.2AH - Battery module

1274520

<https://www.phoenixcontact.com/pc/products/1274520>



Battery module (device with battery), VRLA-AGM, 24 V DC, 1.2 Ah, automatic detection and communication with QUINT UPS-IQ

UPS-BAT/PB/24DC/4AH - Battery module

1274117

<https://www.phoenixcontact.com/pc/products/1274117>



Battery module (device with battery), VRLA-AGM, 24 V DC, 4 Ah, automatic detection and communication with QUINT UPS-IQ

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

UPS-BAT/PB/24DC/7AH - Battery module

1274118

<https://www.phoenixcontact.com/pc/products/1274118>



Battery module (device with battery), VRLA-AGM, 24 V DC, 7 Ah, automatic detection and communication with QUINT UPS-IQ

UPS-BAT/PB/24DC/12AH - Battery module

1274119

<https://www.phoenixcontact.com/pc/products/1274119>



Battery module (device with battery), VRLA-AGM, 24 V DC, 12 Ah, automatic detection and communication with QUINT UPS-IQ

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

UPS-BAT/PB/24DC/20AH - Battery module

1348516

<https://www.phoenixcontact.com/pc/products/1348516>



Battery module (device with battery), VRLA-AGM, 24 V DC, 20 Ah, automatic detection and communication with QUINT UPS-IQ

UPS-BAT/PB/24DC/40AH - Battery module

1354641

<https://www.phoenixcontact.com/pc/products/1354641>



Battery module (device with battery), VRLA-AGM, 24 V DC, 40 Ah, automatic detection and communication with QUINT UPS-IQ

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

UPS-BAT/LI/24DC/128WH - Battery module

1396415

<https://www.phoenixcontact.com/pc/products/1396415>



Battery module (device with battery), Lithium-Ion (LiFePO₄), 24 V DC, 128 Wh. For use with a QUINT UPS for ambient temperatures (charging) of 0°C ... 60°C and a maximum charging current of 5 A. For charging below 0°C, please note the permissible UPS V/C level. 2 x 1446073 are required as replacement batteries.

UPS-BAT/VRLA-WTR/24DC/13AH - Battery module

2320416

<https://www.phoenixcontact.com/pc/products/2320416>



Battery module (device with battery), lead AGM, VRLA technology 24 V DC, 13 Ah, tool-free battery change, automatic detection, and communication with QUINT UPS-IQ

QUINT4-UPS/24DC/24DC/10/485 - Uninterruptible power supply



1322768

<https://www.phoenixcontact.com/pc/products/1322768>

UPS-BAT/VRLA-WTR/24DC/26AH - Battery module

2320429

<https://www.phoenixcontact.com/pc/products/2320429>



Battery module (device with battery), lead AGM, VRLA technology 24 V DC, 26 Ah, tool-free battery change, automatic detection, and communication with QUINT UPS-IQ

UPS-BAT/LI/24DC/64WH - Battery module

1460921

<https://www.phoenixcontact.com/pc/products/1460921>



Battery module (device with battery), Lithium-Ion (LiFePO₄), 24 V DC, 64 Wh. 1 x 1446073 is required as a replacement battery.

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com