

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched ESSENTIAL edition power supply for DIN rail mounting, input: 3-phase, output: 24 V DC / 480 W

Your advantages

- Worldwide use thanks to the wide range input and international approval package
- Fast installation, thanks to easy DIN rail mounting
- Greater availability, thanks to fanless convection cooling

Commercial Data

| | |
|--------------------------------------|---------------|
| Item number | 1018299 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales Key | CMP |
| Product Key | CMPB33 |
| GTIN | 4055626502465 |
| Weight per Piece (including packing) | 2,149 g |
| Weight per Piece (excluding packing) | 2,183 g |
| Customs tariff number | 85044083 |
| Country of origin | CN |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

Technical Data

Input data

AC operation

| | |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Nominal input voltage range | 3x 400 V AC ... 500 V AC |
| Input voltage range | 3x 320 V AC ... 575 V AC (Derating < 360 V AC: 1,5 %/V) |
| Extended input voltage range in operation | 3x 320 V AC ... 575 V AC (Derating < 360 V AC: 1,5 %/V) |
| Input voltage range AC | 3x 320 V AC ... 575 V AC (Derating < 360 V AC: 1,5 %/V) 2x 360 V AC ... 575 V AC (for 2-phase operation) |
| Voltage type of supply voltage | AC |
| Inrush current | < 15 A |
| Inrush current integral (I^2t) | 0.5 A ² s |
| AC frequency range | 45 Hz ... 65 Hz |
| Mains buffering time | > 17 ms (3x 400 V AC) |
| Current consumption | 3x 1.1 A (400 V AC) 3x 0.8 A (480 V AC) |
| Nominal power consumption | 666.33 VA |
| Protective circuit | Transient surge protection; Varistor |
| Power factor (cos phi) | 0.67 |
| Typical response time | < 1 s |
| Permissible backup fuse | B6 B10 B16 |
| Recommended breaker for input protection | 6 A ... 16 A |
| Discharge current to PE | < 3.5 mA |

Output data

| | |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Efficiency | 91 % (at 400 V AC and nominal values) |
| Output characteristic | U/I |
| Nominal output voltage | 24 V DC \pm 1 % |
| Setting range of the output voltage (U_{Set}) | 22.5 V DC ... 29.5 V DC (> 24 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 20 A ($U_{OUT} = 24$ V DC) |
| Derating | 55 °C ... 70 °C (2.5%/K) |
| Feedback voltage resistance | 35 V DC |
| Protection against overvoltage at the output (OVP) | < 35 V DC |
| Max. capacitive load | unlimited |
| Active current limitation | Approx. 25 A |
| Control deviation | < 1 % (change in load, static 10 % ... 90 %) < 2 % (change in load, dynamic 10 % ... 90 %) < 0.1 % (change in input voltage \pm 10 %) |
| Residual ripple | < 10 mV _{PP} |
| Short-circuit-proof | yes |
| No-load proof | yes |
| Output power | 480 W |
| Peak switching voltages nominal load | < 30 mV _{PP} |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

| | |
|-----------------------------------|--------------------------------------------|
| Maximum no-load power dissipation | < 6 W |
| Power loss nominal load max. | < 48 W |
| Rise time | < 2 ms (U_{OUT} (10 % ... 90 %)) |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series | yes |

Connection data

Input

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 9 mm |
| Screw thread | M2,5 |
| Tightening torque, min | 0.4 Nm |
| Tightening torque max | 0.5 Nm |

Output

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.5 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.5 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 12 |
| Conductor cross section AWG max. | 10 |
| Stripping length | 14 mm |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

LED signaling

| | |
|---------------------------|-----------|
| Types of signaling | LED |
| Operating voltage display | Green LED |

Signal output

| | |
|------------------------|-----------------------------------|
| Status display | "DC OK" LED green |
| Note on status display | $U_{OUT} > 21.5$ V: LED lights up |

Electrical properties

| | |
|---------------------------------|--------------------------|
| Number of phases | 3.00 |
| Insulation voltage input/output | 3 kV AC (type test) |
| | 1.5 kV AC (routine test) |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE

1018299

<https://www.phoenixcontact.com/in/products/1018299>

| | |
|--------------------------------|----------|
| Insulation voltage output / PE | 500 V DC |
|--------------------------------|----------|


Product properties

| | |
|----------------------------|-----------------|
| Product type | Power supply |
| | ESSENTIAL POWER |
| MTBF (IEC 61709, SN 29500) | > 700000 h |

Insulation characteristics

| | |
|----------------------|------------------------|
| Protection class | I (with PE connection) |
| Overvoltage category | III |
| Degree of pollution | 2 |

Dimensions

| | |
|---------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width | 115 mm |
| Height | 130 mm |
| Depth | 152.5 mm |

Installation dimensions

| | |
|----------------------------------|---------------|
| Installation distance right/left | 0 mm / 0 mm |
| Installation distance top/bottom | 50 mm / 50 mm |

Mounting

| | |
|-------------------------|------------------------------------------------|
| Mounting type | DIN rail mounting |
| Assembly instructions | alignable: horizontally 0 mm, vertically 50 mm |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| With protective coating | No |

Material specifications

| | |
|----------------------|--------------------------|
| Housing material | Metal |
| Type of housing | Steel sheet, zinc-plated |
| Side element version | Aluminum |

Environmental and real-life conditions

Ambient conditions

| | |
|------------------------------------------------|----------------------------------------------|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 55 °C Derating: 2.5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Climatic class | 3K3 (in acc. with EN 60721) |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing) |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

| | |
|-----------------------|-------------------------------------------------------------------------------------------------|
| Shock | 18 ms, 30g, in each space direction (according to IEC 60068-2-27) |
| Vibration (operation) | < 15 Hz, amplitude ± 2.5 mm (according to IEC 60068-2-6) 15 Hz ... 150 Hz, 2.3g, 90 min. |

Standards and regulations

| | |
|----------------------------------------------------------------------------------------|----------------------------|
| Standard - Electrical safety | EN 60950-1 |
| Standard – Safety extra-low voltage | EN 60950-1 (SELV) |
| Approval - requirement of the semiconductor industry with regard to mains voltage dips | SEMI F47 - 0706 (200 V AC) |

Approval data

| | |
|--------------|------------------------|
| CSA | CSA-C22.2 Nr. 107.1-01 |
| | CSA-C22.2 Nr. 60950-01 |
| UL approvals | UL/C-UL listed UL 508 |

Conformity/Approvals

| | |
|------------------------------------------|---------|
| SIL in accordance with IEC 61508 | 0 |
| Performance level according to ISO 13849 | without |

EMC data

| | |
|-------------------------------------|---------------------------------------------------|
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| EMC requirements for noise immunity | EN 61000-6-1 |
| | EN 61000-6-2 |
| Noise emission | EN 55011 (EN 55022) Class B |
| Noise immunity | EN 61000-6-2:2005 |

Electrostatic discharge

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

Electrostatic discharge

| | |
|-------------------|---------------------|
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 8 kV (Test Level 3) |
| Comments | Criterion A |

Electromagnetic HF field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

Electromagnetic HF field

| | |
|---------------------|------------------|
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 10 V/m |
| Frequency range | 1 GHz ... 2 GHz |
| Test field strength | 10 V/m |
| Frequency range | 2 GHz ... 3 GHz |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

| | |
|---------------------|-------------|
| Test field strength | 10 V/m |
| Comments | Criterion A |

Fast transients (burst)

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

Fast transients (burst)

| | |
|----------|------------------------------------|
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 4 kV (Test Level 4 - asymmetrical) |
| Signal | 2 kV (Test Level 3 - asymmetrical) |
| Comments | Criterion A |

Surge voltage load (surge)

| | |
|-----------------------|------------------------------------|
| Standards/regulations | EN 61000-4-5 |
| Input | 2 kV (Test Level 3 - symmetrical) |
| | 4 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 2 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |
| Comments | Criterion A |

Conducted interference

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

Conducted interference

| | |
|-----------------|---------------------|
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments | Criterion A |
| Voltage | 10 V (Test Level 3) |

Voltage dips

| | |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
|-----------------------|---------------|

Emitted interference

| | |
|--------------------------------------------------|----------------------------------------------------------------------------|
| Standards/regulations | EN 61000-6-3 |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |

Criteria

| | |
|-------------|--------------------------------------------------------------------------------------|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE




1018299


<https://www.phoenixcontact.com/in/products/1018299>

Drawings

Dimensional drawing

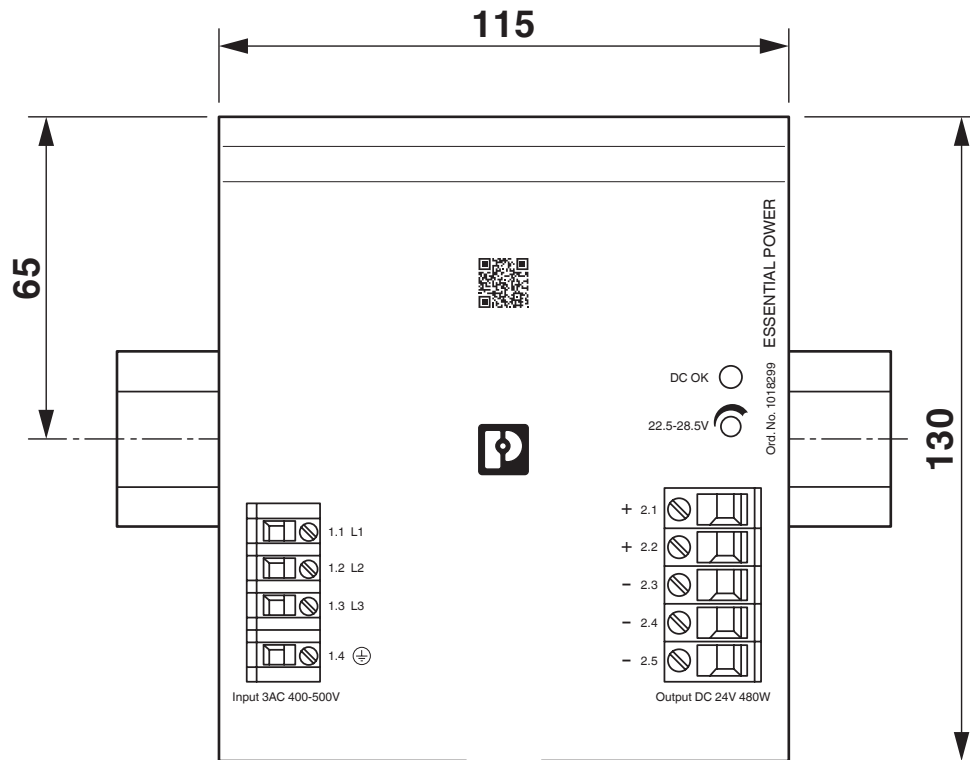

Schematic diagram

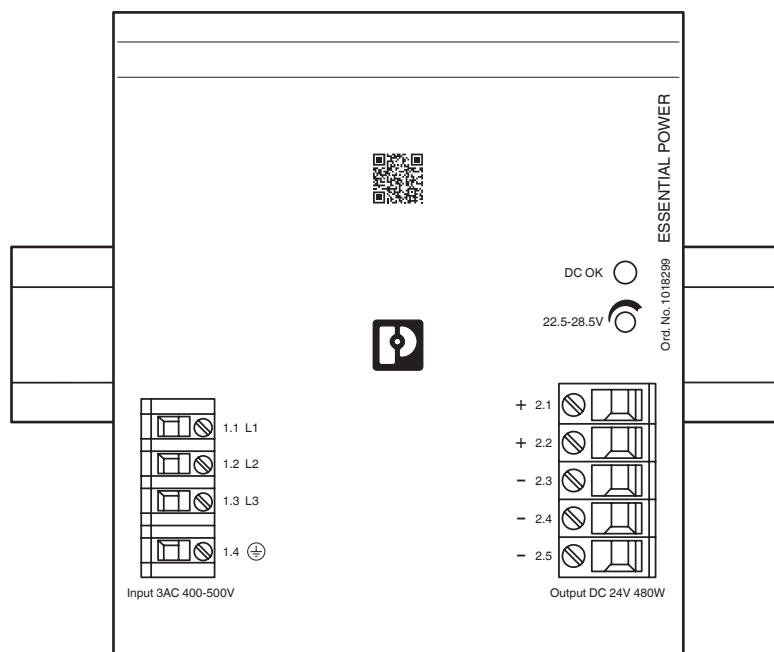


Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE


1018299

<https://www.phoenixcontact.com/in/products/1018299>

Schematic diagram

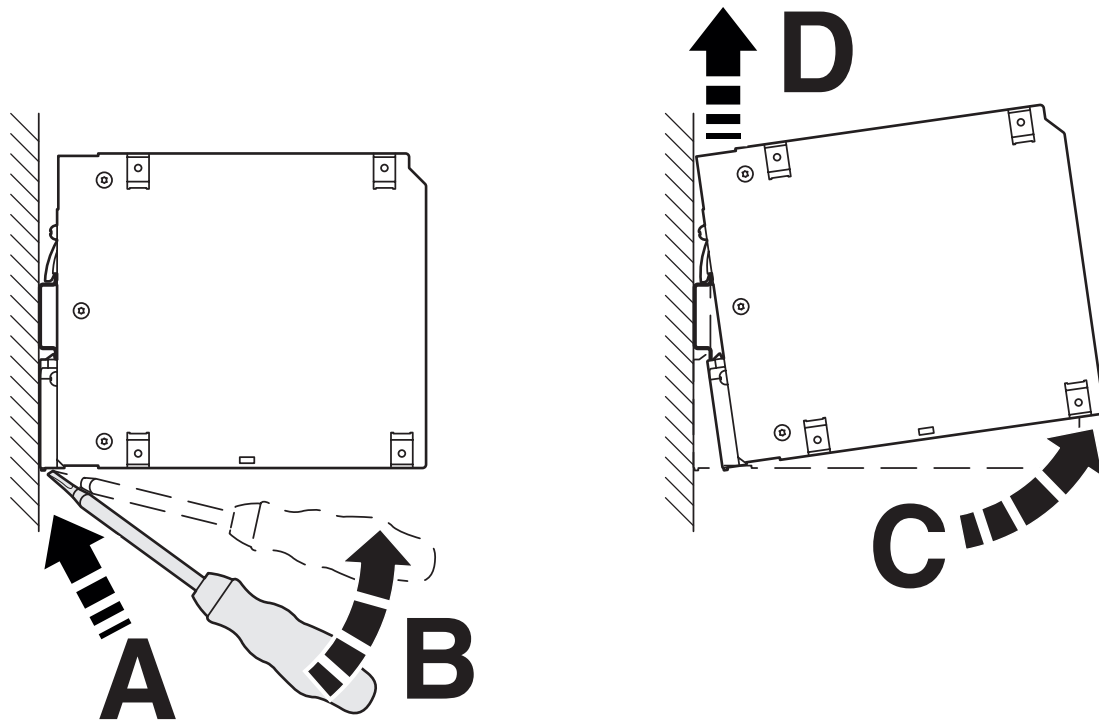

Diagram

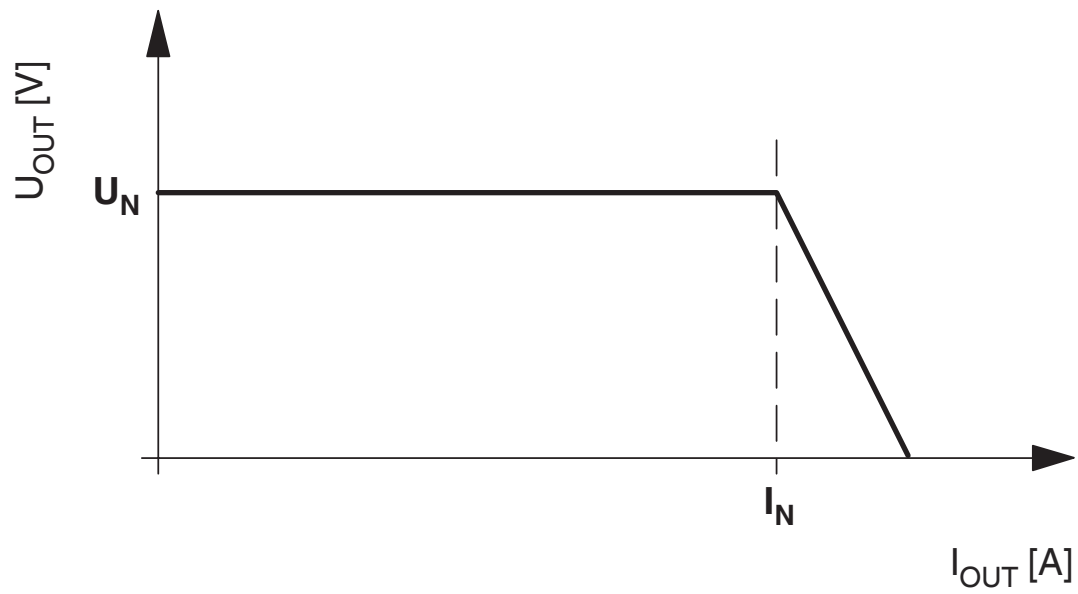


Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE




1018299

<https://www.phoenixcontact.com/in/products/1018299>

Diagram

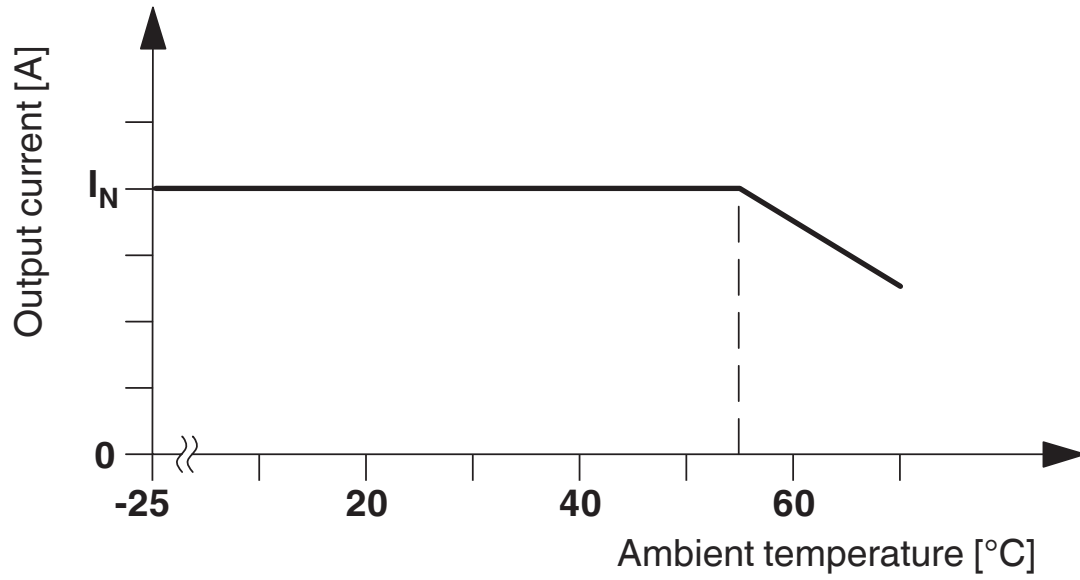

Dimensional drawing

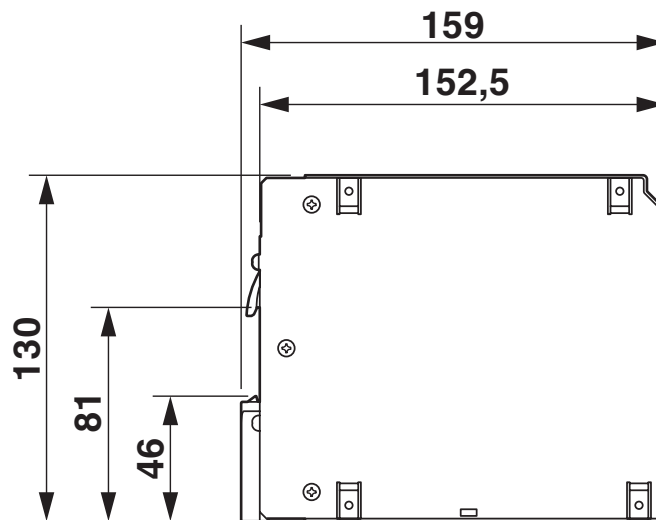


Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE


1018299

<https://www.phoenixcontact.com/in/products/1018299>

Schematic diagram

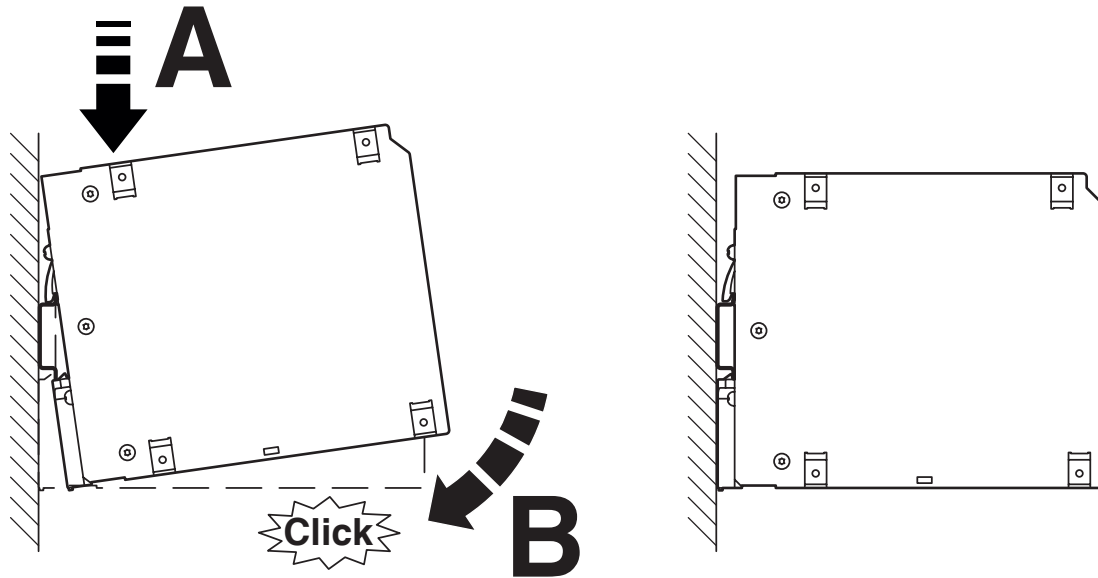

Block diagram

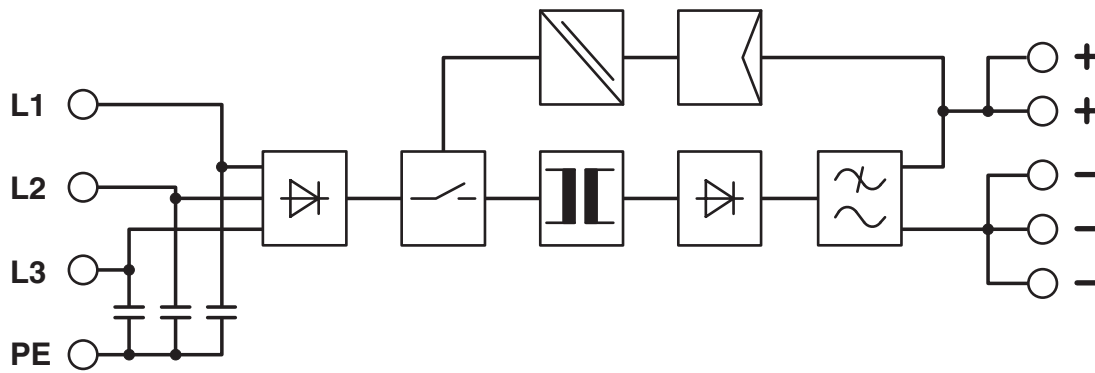

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-9.0 | 27040701 |
| ECLASS-10.0.1 | 27040701 |
| ECLASS-11.0 | 27040701 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299

<https://www.phoenixcontact.com/in/products/1018299>

Environmental Product Compliance

| | |
|------------|--------------------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 25; |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Power supply unit - ESSENTIAL- PS/3AC/24DC/480W/EE



1018299


<https://www.phoenixcontact.com/in/products/1018299>

Accessories

Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-3S-230-FM - 2905230

<https://www.phoenixcontact.com/in/products/2905230>



Plug-in device protection, according to type 3/class III, for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE), with integrated surge-proof fuse and remote indication contact.

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in