

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched power supply unit QUINT POWER, Screw connection, DIN rail mounting, input: 1-phase, output: 24 V DC / 1.3 A

## Product Description

In the power range of up to 100 W, QUINT POWER provides superior system availability in the smallest size. Preventative function monitoring and exceptional power reserves are available for applications in the low-power range.

## Your advantages

- Starting of heavy loads with dynamic boost
- Preventive function monitoring indicates critical operating states before errors occur
- High efficiency and long service life, with low power dissipation and low heating
- Space savings in the control cabinet, thanks to a narrow, slim-line design
- Free selection between Push-in and screw connection

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2904597             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Product Key                          | CMPI13              |
| Catalog Page                         | Page 250 (C-4-2019) |
| GTIN                                 | 4055626156033       |
| Weight per Piece (including packing) | 251 g               |
| Weight per Piece (excluding packing) | 187 g               |
| Customs tariff number                | 85044083            |
| Country of origin                    | VN                  |

## Technical Data

### Input data

#### AC operation

|  |  |
|--|--|
| Input voltage range                      | 100 V AC ... 240 V AC -15 % ... +10 %            |
| Electric strength, max.                  | 300 V AC 30 s                                    |
| Typical national grid voltage            | 120 V AC   |
|  | 230 V AC   |
| Voltage type of supply voltage           | AC/DC  |
| Inrush current                           | typ. 5.9 A (at 25 °C)                            |
| Inrush current integral ( $I^2t$ )       | < 0.1 A <sup>2</sup> s                           |
| Inrush current limitation                | 5.9 A  |
|  | < 14 A   |
| Frequency range ( $f_N$ )                | 50 Hz ... 60 Hz -10 % ... +10 %                  |
| Mains buffering time                     | typ. 43 ms (120 V AC)                            |
|  | typ. 43 ms (230 V AC)                            |
| Current consumption                      | 0.46 A (100 V AC)                                |
|  | 0.37 A (120 V AC)                                |
|  | 0.2 A (230 V AC)                                 |
|  | 0.2 A (240 V AC)                                 |
| Nominal power consumption                | 37 VA  |
| Protective circuit                       | Transient surge protection; Varistor             |
| Typical response time                    | 500 ms   |
| Input fuse                               | 3.15 A (slow-blow, internal)                     |
| Recommended breaker for input protection | 6 A ... 16 A (Characteristic B, C or comparable) |
| Discharge current to PE                  | < 0.25 mA (264 V AC, 60 Hz)                      |
|  | 0.18 mA (264 V AC, 60 Hz)                        |

#### DC operation

|                                |                                       |
|--------------------------------|---------------------------------------|
| Input voltage range            | 110 V DC ... 250 V DC -20 % ... +40 % |
| Voltage type of supply voltage | AC/DC                                 |
| Current consumption            | 0.4 A (110 V DC)                      |
|                                | 0.17 A (250 V DC)                     |

### Output data

|   |   |
|---|---|
| Efficiency  | typ. 89.2 % (120 V AC)                  |
|   | typ. 90.7 % (230 V AC)                  |
| Output characteristic                             | U/I Advanced                            |
| Nominal output voltage                            | 24 V DC                                 |
| Setting range of the output voltage ( $U_{Set}$ ) | 24 V DC ... 28 V DC (constant capacity) |
| Nominal output current ( $I_N$ )                  | 1.3 A                                   |
| Static Boost ( $I_{Stat.Boost}$ )                 | 1.625 A ( $\leq 40$ °C)                 |
| Dynamic Boost ( $I_{Dyn.Boost}$ )                 | 2.6 A ( $\leq 60$ °C (5 s))             |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

|  |  |
|--|--|
| Derating   | > 60 °C (2.5%/K)                                   |
| Feedback voltage resistance                        | ≤ 35 V DC  |
| Protection against overvoltage at the output (OVP) | ≤ 32 V DC  |
| Control deviation                                  | < 0.5 % (Static load change 10 % ... 90 %)         |
|  | < 2 % (Dynamic load change 10 % ... 90 %, (10 Hz)) |
|  | < 0.1 % (change in input voltage ±10 %)            |
| Residual ripple                                    | < 40 mV <sub>PP</sub> (with nominal values)        |
| Short-circuit-proof                                | yes  |
| No-load proof                                      | yes  |
| Output power                                       | 30 W   |
|  | 38 W   |
|  | 60 W   |
| Maximum no-load power dissipation                  | < 0.4 W (230 V AC)                                 |
|  | < 0.4 W (120 V AC)                                 |
| Power loss nominal load max.                       | < 3.7 W (120 V AC)                                 |
|  | < 3.1 W (230 V AC)                                 |
| Crest factor                                       | typ. 1.71 (120 V AC)                               |
|  | typ. 1.94 (230 V AC)                               |
| Rise time  | 50 ms (U <sub>Out</sub> = 10 % ... 90 %)           |
| Connection in parallel                             | yes, for redundancy and increased capacity         |
| Connection in series                               | yes  |

## Signal (configurable)

|         |   |
|---------|---|
| Digital | 0 V DC 24 V DC 30 mA  |
| Default | 24 V DC 30 mA 24 V DC for U <sub>Out</sub> > 0.9 × U <sub>Set</sub> |

## Connection data

### Input

|   |                      |
|---|----------------------|
| Connection method   | Screw connection     |
| Conductor cross section solid min.                            | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.                            | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                         | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible max.                         | 2.5 mm <sup>2</sup>  |
| Single conductor/terminal point, stranded, with ferrule, min. | 0.25 mm <sup>2</sup> |
| Single conductor/terminal point, stranded, with ferrule, max. | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                              | 26                   |
| Conductor cross section AWG max.                              | 14                   |
| Stripping length  | 8 mm                 |
| Tightening torque, min  | 0.5 Nm               |
| Tightening torque max   | 0.6 Nm               |

### Output

|                                    |                      |
|------------------------------------|----------------------|
| Connection method                  | Screw connection     |
| Conductor cross section solid min. | 0.14 mm <sup>2</sup> |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

|   |                      |
|---|----------------------|
| Conductor cross section solid max.                            | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                         | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible max.                         | 2.5 mm <sup>2</sup>  |
| Single conductor/terminal point, stranded, with ferrule, min. | 0.25 mm <sup>2</sup> |
| Single conductor/terminal point, stranded, with ferrule, max. | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                              | 26                   |
| Conductor cross section AWG max.                              | 14                   |
| Stripping length  | 8 mm                 |
| Tightening torque, min  | 0.5 Nm               |
| Tightening torque max   | 0.6 Nm               |

## Signal

|   |                      |
|---|----------------------|
| Connection method   | Screw connection     |
| Conductor cross section solid min.                            | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.                            | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                         | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible max.                         | 2.5 mm <sup>2</sup>  |
| Single conductor/terminal point, stranded, with ferrule, min. | 0.25 mm <sup>2</sup> |
| Single conductor/terminal point, stranded, with ferrule, max. | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                              | 26                   |
| Conductor cross section AWG max.                              | 14                   |
| Stripping length  | 8 mm                 |
| Tightening torque, min  | 0.5 Nm               |
| Tightening torque max   | 0.6 Nm               |

## LED signaling

|                    |     |
|--------------------|-----|
| Types of signaling | LED |
|--------------------|-----|

## Signal output

|                  |  |
|------------------|--|
| P <sub>Out</sub> | > P <sub>Thr</sub> (LED lights up yellow, output power > P <sub>Thr</sub> , depending on the rotary selector switch setting) |
|                  | > 0.9 × U <sub>Set</sub> (LED lights up green)   |
|                  | < 0.9 × U <sub>Set</sub> (LED flashes green)   |

## Electrical properties

|                                 |  |
|---------------------------------|--|
| Number of phases                | 1.00   |
| Insulation voltage input/output | 4 kV AC (type test)                          |
|                                 | 3 kV AC (routine test)                       |
| Switching frequency             | 2 kHz ... 35 kHz (Auxiliary converter stage) |
|                                 | 30 kHz ... 150 kHz (PFC stage)               |
|                                 | 80 kHz ... 150 kHz (Main converter stage)    |

## Product properties

|                |              |
|----------------|--------------|
| Product type   | Power supply |
| Product family | QUINT POWER  |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

|                                    |                           |
|------------------------------------|---------------------------|
| MTBF (IEC 61709, SN 29500)         | > 1904000 h (25 °C)       |
|                                    | > 1107000 h (40 °C)       |
|                                    | > 486000 h (60 °C)        |
| Environmental protection directive | RoHS Directive 2011/65/EU |
|                                    | WEEE                      |
|                                    | Reach                     |

## Insulation characteristics

|                     |    |
|---------------------|----|
| Protection class    | II |
| Degree of pollution | 2  |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 1.3 A    |
| Temperature     | 40 °C    |
| Time            | 150000 h |
| Additional text | 120 V AC |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 1.3 A    |
| Temperature     | 40 °C    |
| Time            | 215000 h |
| Additional text | 230 V AC |


## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 1.3 A    |
| Temperature     | 25 °C    |
| Time            | 424000 h |
| Additional text | 120 V AC |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 1.3 A    |
| Temperature     | 25 °C    |
| Time            | 609000 h |
| Additional text | 230 V AC |

## Dimensions

|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 22.5 mm  |
| Height              | 99 mm  |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

|       |       |
|-------|-------|
| Depth | 90 mm |
|-------|-------|

## Installation dimensions

|  |                                       |
|--|---------------------------------------|
| Installation distance right/left (active)          | 15 mm / 15 mm ( $P_{Out} \geq 50\%$ ) |
| Installation distance right/left (passive)         | 5 mm / 5 mm ( $P_{Out} \geq 50\%$ )   |
| Installation distance top/bottom (active)          | 30 mm / 30 mm ( $P_{Out} \geq 50\%$ ) |
| Installation distance top/bottom (passive)         | 30 mm / 30 mm ( $P_{Out} \geq 50\%$ ) |
| Installation distance top/bottom (active, passive) | 30 mm / 30 mm ( $P_{Out} \leq 50\%$ ) |

## Mounting

|                         |                   |
|-------------------------|-------------------|
| Mounting type           | DIN rail mounting |
| Assembly instructions   | DIN rail mounting |
| With protective coating | No                |

## Material specifications

|  |               |
|--|---------------|
| Flammability rating according to UL 94 (housing / terminal blocks) | V0            |
| Housing material   | Plastic       |
| Type of housing  | Polycarbonate |
| Hood version   | Polycarbonate |

## Environmental and real-life conditions

### Ambient conditions

|  |  |
|--|--|
| Degree of protection                           | IP20   |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)   |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C   |
| Ambient temperature (start-up type tested)     | -40 °C   |
| Maximum altitude                               | ≤ 5000 m (> 2000 m, observe derating)  |
| Climatic class                                 | 3K3 (in acc. with EN 60721)  |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)  |
| Shock  | 18 ms, 30g, in each space direction (according to IEC 60068-2-27)                              |
| Vibration (operation)                          | < 15 Hz, ±2.5 mm amplitude; 15 Hz ... 100 Hz: 2.3 g 90 Min. (in accordance with IEC 60068-2-6) |

## Standards and regulations

|  |  |
|--|--|
| Standard – Limitation of mains harmonic currents                             | EN 61000-3-2                                 |
| Standard - Electrical safety   | IEC 61010-2-201 (SELV)                       |
| Standard – Safety extra-low voltage  | IEC 61010-1 (SELV)<br>IEC 61010-2-201 (PELV) |
| Standard - Safe isolation  | IEC 61558-2-16<br>IEC 61010-2-201            |
| Standard - safety for equipment for measurement, control, and laboratory use | IEC 61010-1                                  |
| Standard - Safety of transformers  | EN 61558-2-16                                |
| Standard - power supply devices for low voltage with DC output               | EN 61204-3                                   |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Overvoltage category

|            |                      |
|------------|----------------------|
| EN 61010-1 | II ( $\leq 5000$ m)  |
| EN 62477-1 | III ( $\leq 2000$ m) |

## Approval data

|              |  |
|--------------|--|
| SIQ          | CB-Scheme (IEC 61010-1, IEC 61010-2-201)                                   |
| UL approvals | UL Listed UL 61010-1   |
|              | UL Listed UL 61010-2-201   |
|              | UL 1310 Class 2 Power Units  |
|              | ANSI/UL 121201 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

## EMC data

|                                     |   |
|-------------------------------------|---|
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU   |
| EMC requirements for noise emission | EN 61000-6-3  |
|                                     | EN 61000-6-4  |
| EMC requirements for noise immunity | EN 61000-6-1  |
|                                     | EN 61000-6-2  |
| EMC requirements, power plant       | IEC 61850-3   |
|                                     | EN 61000-6-5  |
| Conducted noise emission            | EN 55016  |
|                                     | EN 61000-6-3 (Class B)  |
| Interference emission               | Interference emission in accordance with EN 61000-6-3 (residential and commercial) and EN 61000-6-4 (industrial)  |
| Noise emission                      | Additional basic standard EN 61000-6-5 (immunity in power station), IEC/EN 61850-3 (energy supply)  |
| Noise emission                      | EN 55016  |
|                                     | EN 61000-6-3 (Class B)  |
| Noise immunity                      | Immunity in accordance with EN 61000-6-1 (residential), EN 61000-6-2 (industrial), and EN 61000-6-5 (power station equipment zone), IEC/EN 61850-3 (power supply) |

## Harmonic currents

|                 |                 |
|-----------------|-----------------|
| Frequency range | 0 kHz ... 2 kHz |
|-----------------|-----------------|

## Flicker

|                 |                 |
|-----------------|-----------------|
| Frequency range | 0 kHz ... 2 kHz |
|-----------------|-----------------|

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|                   |                     |
|-------------------|---------------------|
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air  | 8 kV (Test Level 3) |
| Comments          | Criterion A         |

## Electromagnetic HF field

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                       |
|---------------------|-----------------------|
| Frequency range     | 80 MHz ... 1 GHz      |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range     | 1 GHz ... 6 GHz       |
| Test field strength | 10 V/m (Test Level 3) |
| Comments            | Criterion A           |

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

|          |                                    |
|----------|------------------------------------|
| Input    | 4 kV (Test Level 4 - asymmetrical) |
| Output   | 4 kV (Test Level X - asymmetrical) |
| Signal   | 4 kV (Test Level X - asymmetrical) |
| Comments | Criterion A                        |

## Surge voltage load (surge)

|          |                                     |
|----------|-------------------------------------|
| Input    | 2 kV (Test Level 4 - symmetrical)   |
|          | 4 kV (Test Level 4 - asymmetrical)  |
| Output   | 1 kV (Test Level 3 - symmetrical)   |
|          | 2 kV (Test Level 3 - asymmetrical)  |
| Signal   | 0.5 kV (Test Level 2 - symmetrical) |
|          | 1 kV (Test Level 2 - asymmetrical)  |
| Comments | Criterion A                         |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|                 |                     |
|-----------------|---------------------|
| I/O/S           | asymmetrical        |
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments        | Criterion A         |
| Voltage         | 10 V (Test Level 3) |

## Power frequency magnetic field

|                       |                 |
|-----------------------|-----------------|
| Standards/regulations | EN 61000-4-8    |
| Frequency             | 16.67 Hz        |
|                       | 50 Hz           |
|                       | 60 Hz           |
| Test field strength   | 100 A/m         |
| Additional text       | 60 s            |
| Comments              | Criterion A     |
| Frequency             | 50 Hz           |
|                       | 60 Hz           |
| Frequency range       | 50 Hz ... 60 Hz |



# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

|                     |          |
|---------------------|----------|
| Test field strength | 1 kA/m   |
| Additional text     | 3 s      |
| Frequency           | 0 Hz     |
| Test field strength | 300 A/m  |
| Additional text     | DC, 60 s |

## Voltage dips

|                       |                          |
|-----------------------|--------------------------|
| Standards/regulations | EN 61000-4-11            |
| Voltage               | 100 V AC                 |
| Frequency             | 60 Hz                    |
| Voltage dip           | 70 %                     |
| Number of periods     | 0.5 / 1 / 30 periods     |
| Additional text       | Test Level 2             |
| Comments              | Criterion A              |
| Voltage dip           | 40 %                     |
| Number of periods     | 5 / 10 / 50 periods      |
| Additional text       | Test Level 2             |
| Comments              | Criterion B              |
| Voltage dip           | 0 %                      |
| Number of periods     | 0.5 / 1 / 5 / 50 periods |
| Additional text       | Test Level 2             |
| Comments              | Criterion B              |

## Pulse-shape magnetic field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-9 |
| Test field strength   | 1000 A/m     |
| Comments              | Criterion A  |

## Attenuated sinusoidal oscillations (ring wave)

|                       |   |
|-----------------------|---|
| Standards/regulations | EN 61000-4-12                             |
| Input                 | 2 kV (symmetrical)<br>4 kV (asymmetrical) |
| Comments              | Criterion A                               |

## Asymmetrical conducted disturbance variables

|                       |                                     |
|-----------------------|-------------------------------------|
| Standards/regulations | EN 61000-4-16                       |
| Test level 1          | 16.67 Hz 50 Hz 60 Hz (Test Level 2) |
| Voltage               | 30 V (10 s)                         |
| Test level 2          | 16.67 Hz 50 Hz 60 Hz (Test Level 4) |
| Voltage               | 300 V (1 s)                         |
| Comments              | Criterion A                         |

## Attenuated oscillating wave

|                     |   |
|---------------------|---|
| Input/Output/Signal | 1 kV (symmetrical)<br>2.5 kV (asymmetrical) |
| Comments            | Criterion A                                 |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC




2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Criteria

|             |  |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits.   |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself.   |
| Criterion C | Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements. |

## Drawings

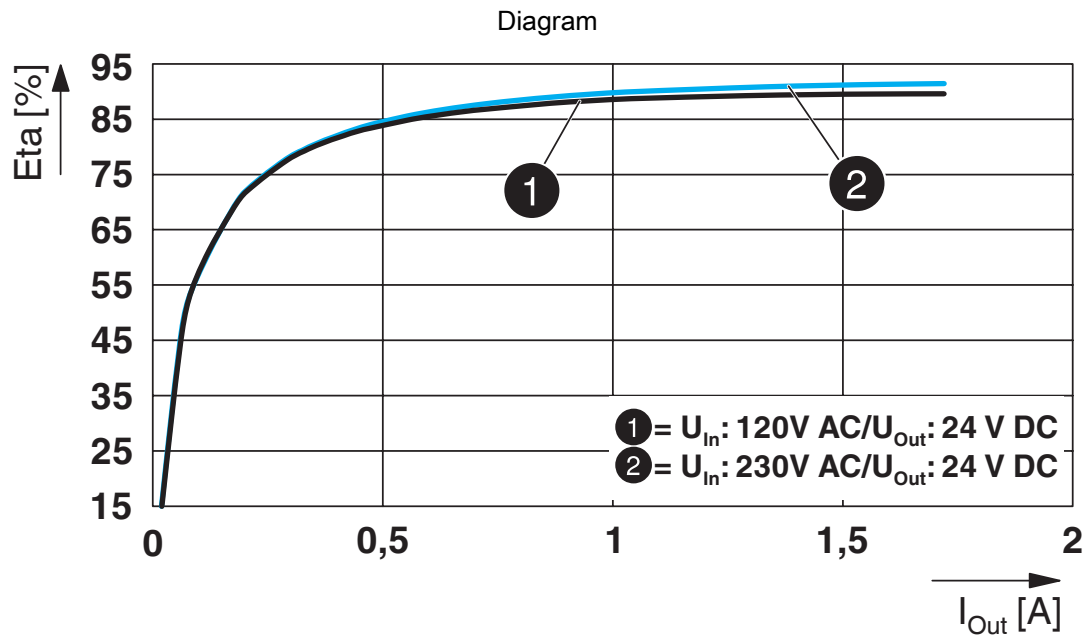


# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC

2904597

<https://www.phoenixcontact.com/pc/products/2904597>



Dimensional drawing

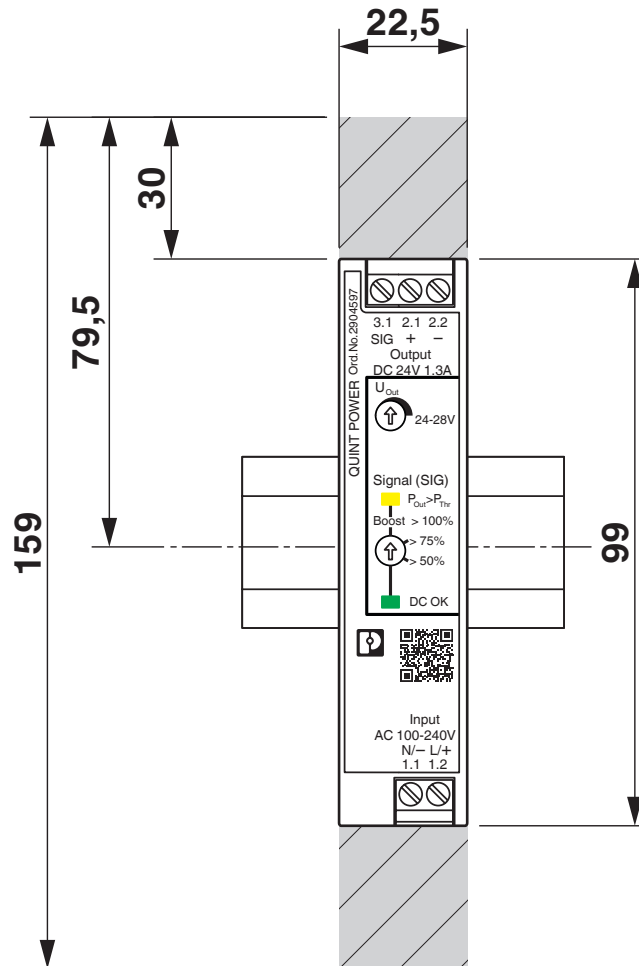


# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC




2904597

<https://www.phoenixcontact.com/pc/products/2904597>

Diagram

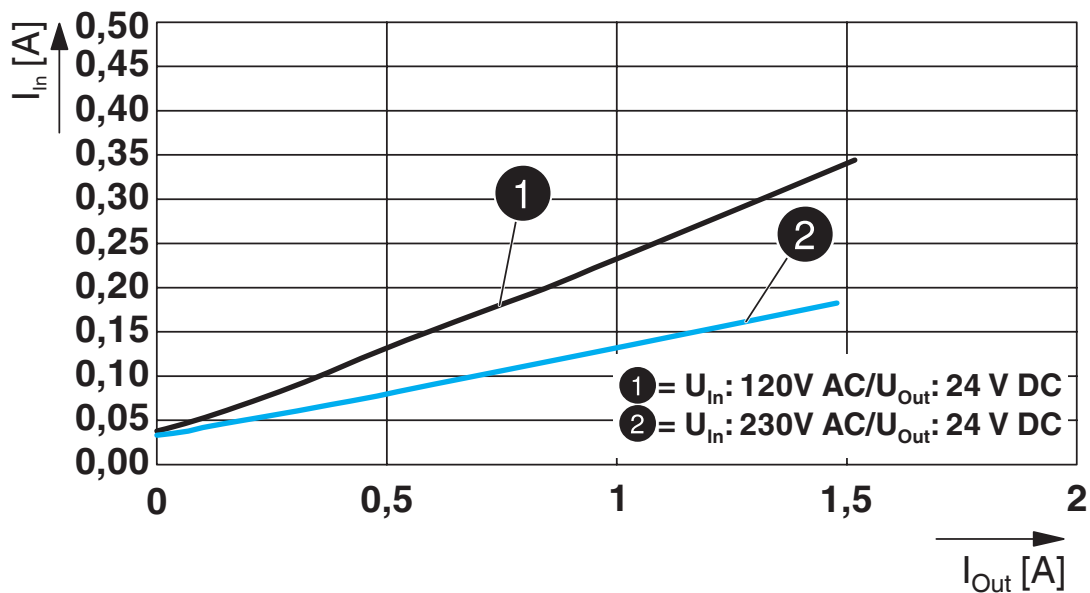


Block diagram

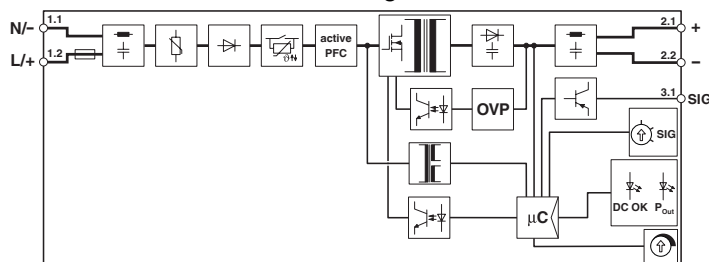

Schematic diagram

# Housing

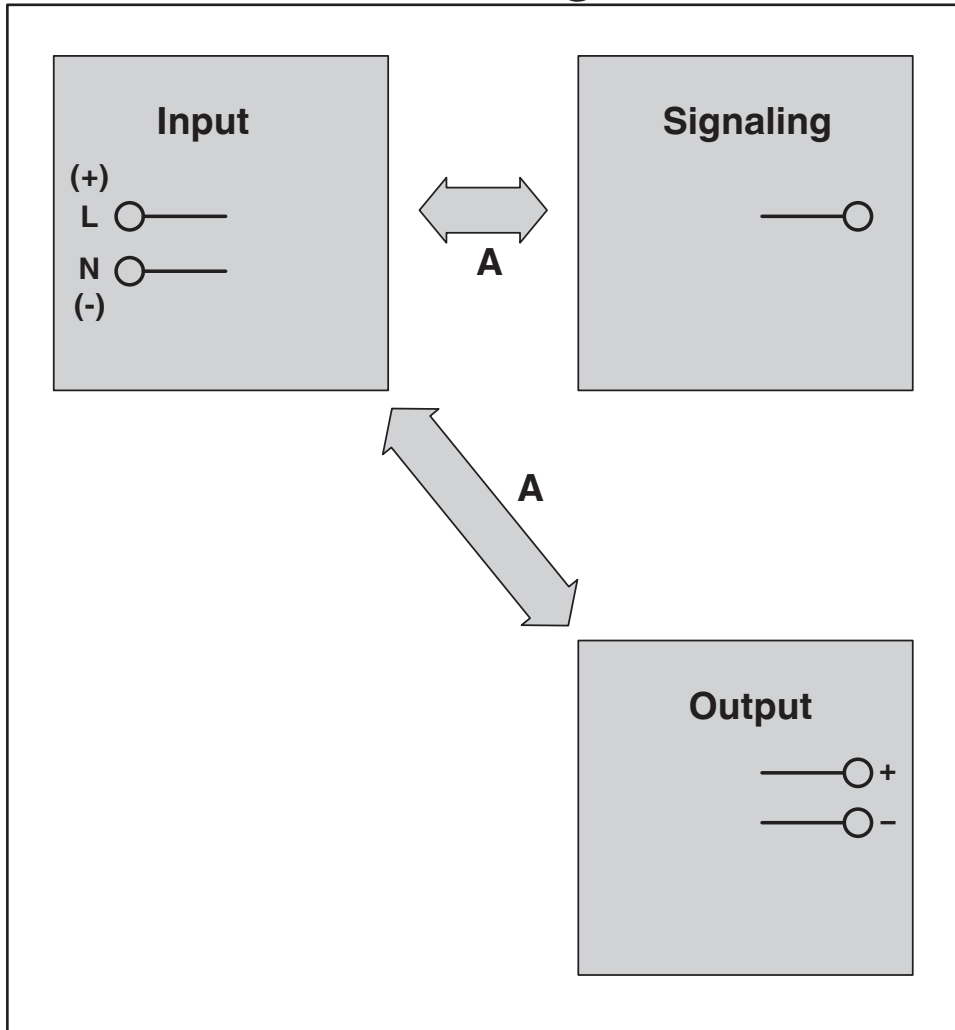


# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

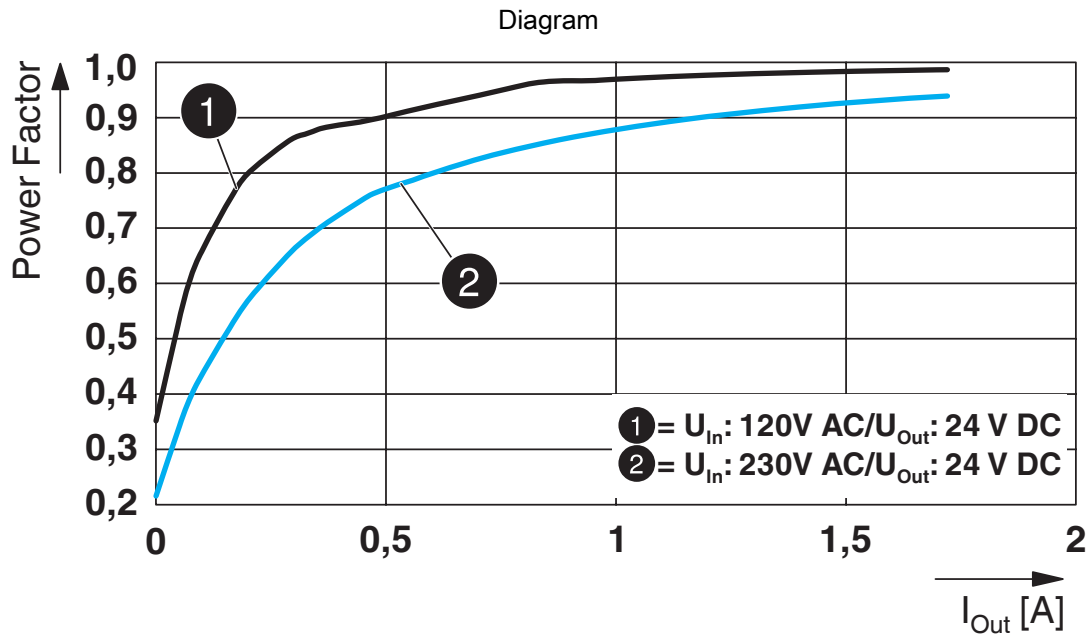

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Approvals



**IECEE CB Scheme**

Approval ID: SI-8861



**EAC**

Approval ID: RU S-DE.BL08.W.00764



**UL Listed**

Approval ID: FILE E 123528



**cUL Listed**

Approval ID: FILE E 123528



**EAC**

Approval ID: RU S-DE.BL08.W.00764

**DNV**

Approval ID: TAA00000BV



**cUL Listed**

Approval ID: FILE E 199827



**UL Listed**

Approval ID: FILE E 199827

**cULus Listed**

**cULus Listed**



# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27040701 |
| ECLASS-10.0.1 | 27040701 |
| ECLASS-11.0   | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002540 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Environmental Product Compliance

|            |  |
|------------|--|
| REACH SVHC | Lead 7439-92-1   |
| China RoHS | Environmentally Friendly Use Period = 25;  |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Accessories

### Screwdriver

Screwdriver - SF-SL 0,4X2,0-60 - 1212546

<https://www.phoenixcontact.com/pc/products/1212546>



Screwdriver, flat bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip

---

### Electronic circuit breaker

Electronic circuit breaker - CBMC E4 24DC/1-10A NO - 2906032

<https://www.phoenixcontact.com/pc/products/2906032>



Multi-channel electronic circuit breaker for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Electronic circuit breaker

Electronic circuit breaker - CBMC E4 24DC/1-4A NO - 2906031

<https://www.phoenixcontact.com/pc/products/2906031>



Multi-channel electronic circuit breaker for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

---

## Electronic circuit breaker

Electronic circuit breaker - CBMC E4 24DC/1-4A NO-C - 2908713

<https://www.phoenixcontact.com/pc/products/2908713>



Multi-channel electronic circuit breaker that can be preconfigured, for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

# Power supply unit - QUINT4-PS/1AC/24DC/1.3/SC



2904597

<https://www.phoenixcontact.com/pc/products/2904597>

## Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-230-FM-UT - 2907919

<https://www.phoenixcontact.com/pc/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

---

## Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-24-FM-UT - 2907916

<https://www.phoenixcontact.com/pc/products/2907916>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)