

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched ESSENTIAL edition power supply for DIN rail mounting, input: 1-phase, output:
24 V DC / 120 W

Your advantages

- Worldwide use thanks to the wide range input and international approval package
- Fast installation, thanks to easy DIN rail mounting
- Greater availability, thanks to fanless convection cooling

Commercial Data

Item number	2910586
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CMP
Product Key	CMPB13
GTIN	4055626464411
Weight per Piece (including packing)	672,1 g
Weight per Piece (excluding packing)	530 g
Customs tariff number	85044083
Country of origin	IN

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Technical Data

Input data

AC operation

Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	85 V AC ... 264 V AC (< 100 V AC derating 1%/V AC)
Derating	< 100 V (1 %/V)
Input voltage range AC	85 V AC ... 264 V AC
Input voltage range DC	120 V DC ... 375 V DC
Inrush current	typ. 20 A (115 V AC)
	typ. 40 A (230 V AC)
AC frequency range	47 Hz ... 63 Hz
Mains buffering time	typ. 20 ms (115 V AC)
	typ. 90 ms (230 V AC)
Current consumption	2.2 A (115 V AC)
	1.2 A (230 V AC)
Nominal power consumption	249.56 VA
Protective circuit	Transient surge protection; Varistor
Typical response time	200 ms
Input fuse	4 A (slow-blow, internal)
Permissible backup fuse	B20
Discharge current to PE	< 0.25 mA (264 V AC)

Output data

Efficiency	85 % (115 V AC)
	88 % (230 V AC)
Output characteristic	HICCUP
Nominal output voltage	24 V DC \pm 2 %
Setting range of the output voltage (U_{Set})	22 V DC ... 28 V DC (max. power \leq 120 W)
Nominal output current (I_N)	5 A
Derating	-20 °C ... -10 °C (2 % / °C)
	> 40 °C (1.67 % / °C, 115 V AC)
	> 50 °C (2.5 % / °C, 230 V AC)
Max. capacitive load	8000 μ F
Active current limitation	105% - 150% of the max. output power (in the event of short circuit)
Control deviation	\leq 1 % (change in load, static 10 % ... 90 %)
	typ. \pm 2 % (change in load, dynamic 10 % ... 90 %)
	< 0.1 % (change in input voltage \pm 10 %)
Residual ripple	< 120 mV _{PP} (-10 °C ... +70 °C)
	< 240 mV _{PP} (-20 °C ... -10 °C)
Output power	120 W
Maximum no-load power dissipation	0.65 W (115 V AC / 230 V AC)

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Power loss nominal load max.	13.3 W (115 V AC / 230 V AC)
Rise time	typ. 30 ms (at nominal load)

Connection data

Input

Connection method	Screw connection
Conductor cross section AWG min.	18
Conductor cross section AWG max.	8
Stripping length	7 mm

Output

Connection method	Screw connection
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Stripping length	7 mm

LED signaling

Types of signaling	LED
Operating voltage display	Green LED

Signal output

Status display	"DC OK" LED green
----------------	-------------------

Electrical properties

Number of phases	1.00
Insulation voltage input/output	3 kV AC
Insulation voltage output / PE	0.5 kV AC
Insulation voltage input / PE	2 kV AC


Product properties

Product type	Power supply
Product family	ESSENTIAL edition
MTBF (Telcordia SR-332)	> 700000 h

Insulation characteristics

Protection class	I (with PE connection)
Degree of pollution	2

Dimensions

Dimensional drawing	
---------------------	--

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Width	40 mm
Height	123.6 mm
Depth	117.6 mm

Installation dimensions

Installation distance right/left	10 mm / 10 mm
Installation distance top/bottom	50 mm / 50 mm

Mounting

Mounting type	DIN rail mounting
Assembly instructions	alignable: horizontally 10 mm, vertically 50 mm
With protective coating	No

Material specifications

Housing material	Metal
Type of housing	Steel sheet, zinc-plated
Side element version	Aluminum
Housing material	Aluminum

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 5000 m (> 2000 m, Derating: 10 %/1000 m)
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Shock	IEC 60068-2-27, 27, half sinusoidal wave: 50g for 11 ms; 3x per direction, 9x overall
Vibration (operation)	IEC 60068-2-6, sinusoidal waves: 10 Hz ... 500 Hz, 19,6 m/s ² (2g peak), 10 min. per cycle, 60 min. in the X direction

Standards and regulations

Standard - Electrical safety	EN 60950-1
Standard - Safety extra-low voltage	EN 60950-1 (SELV)
Approval - requirement of the semiconductor industry with regard to mains voltage dips	SEMI F47 - 0706 (200 V AC)

Approval data

CSA	CSA-C22.2 Nr. 107.1-01
	CSA-C22.2 Nr. 60950-01
UL approvals	UL/C-UL listed UL 508

EMC data

Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
EMC requirements for noise emission	EN 61000-6-3

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

	EN 61000-6-4
EMC requirements for noise immunity	EN 61000-6-1
	EN 61000-6-2
Noise emission	EN 55011 (EN 55022) Class B
Noise immunity	EN 61000-6-2
	EN 61000-6-1
Emitted interference	
Standards/regulations	EN 61000-6-3

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE




2910586


<https://www.phoenixcontact.com/za/products/2910586>

Drawings

Block diagram

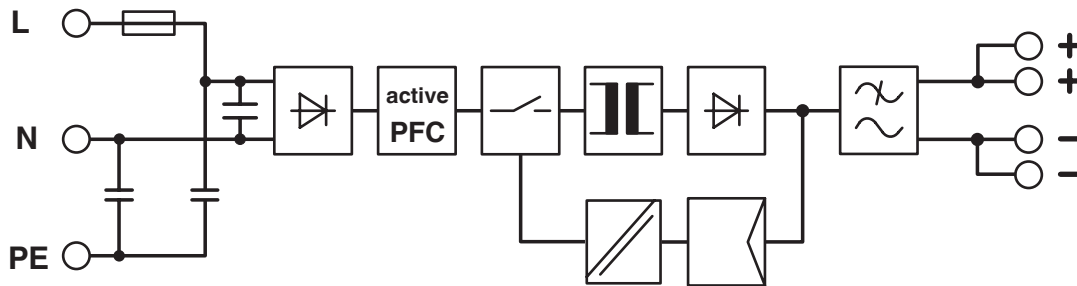

Dimensional drawing

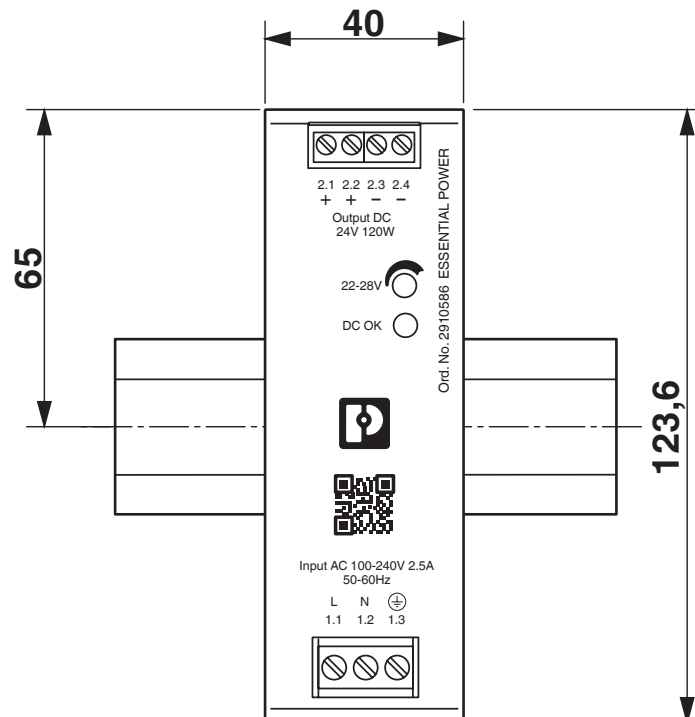


Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Schematic diagram

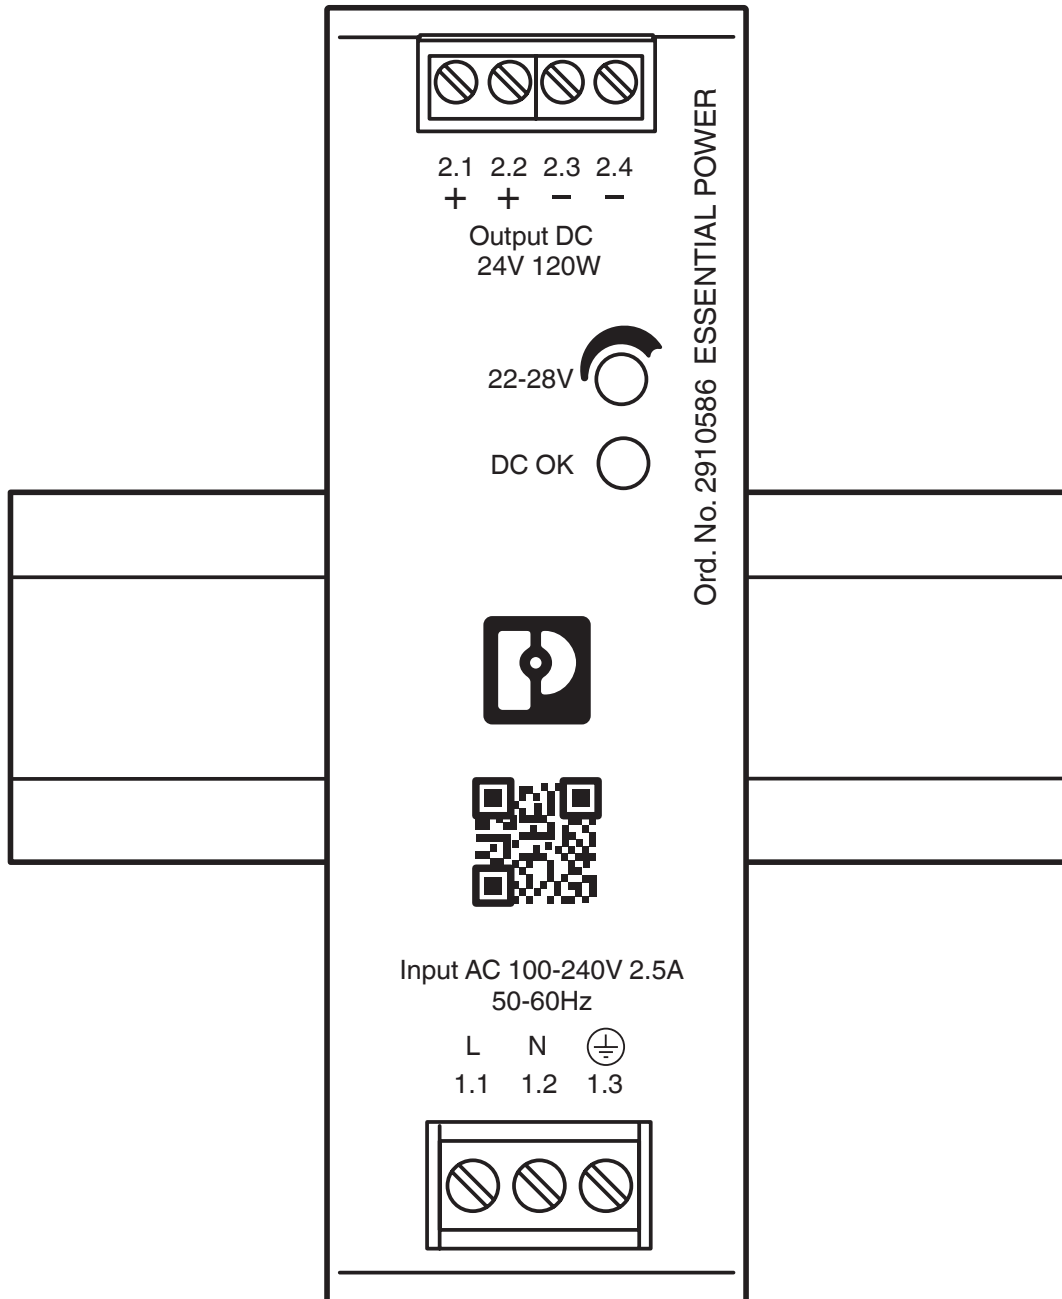


Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE




2910586

<https://www.phoenixcontact.com/za/products/2910586>

Diagram

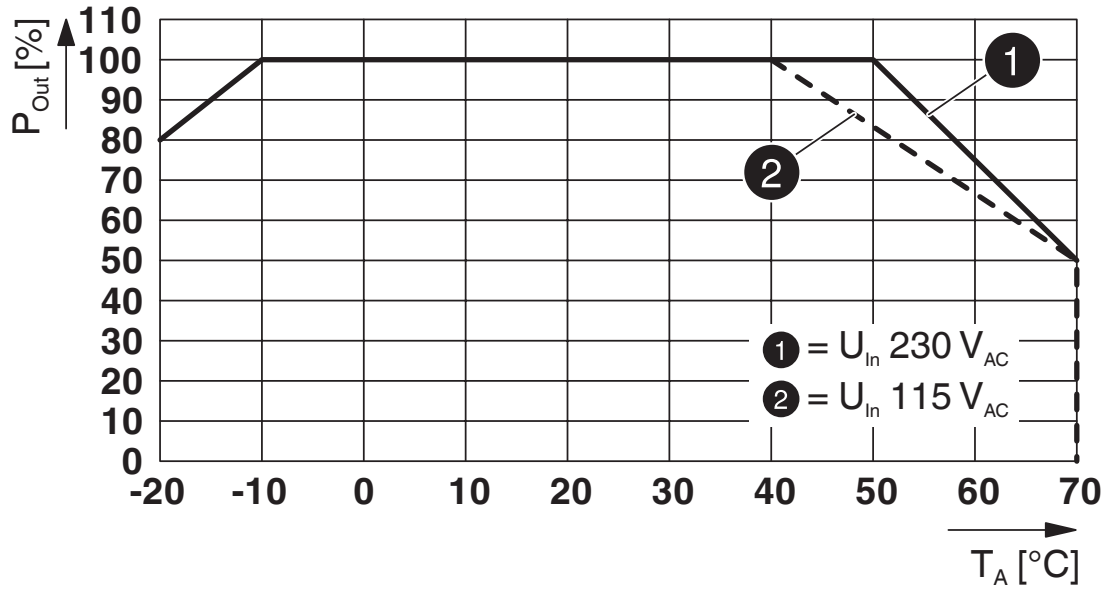

Dimensional drawing

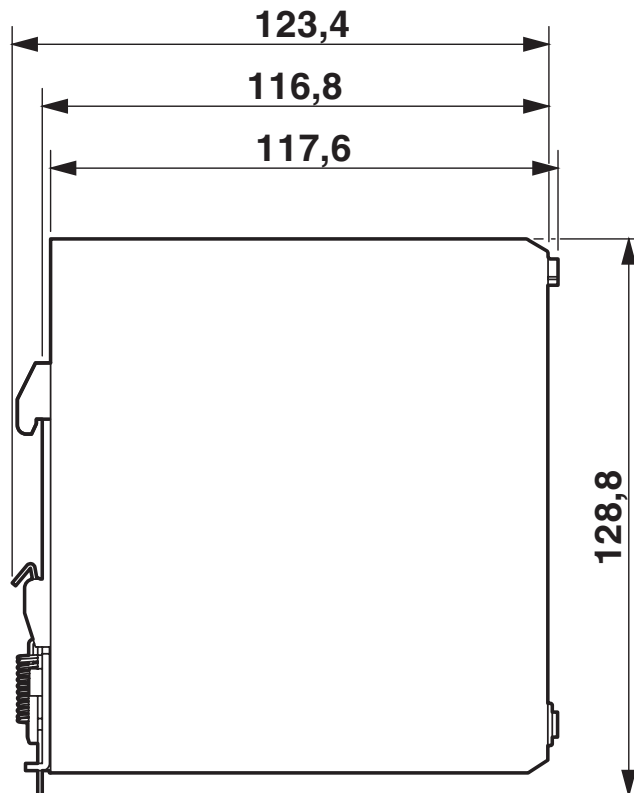


Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Diagram

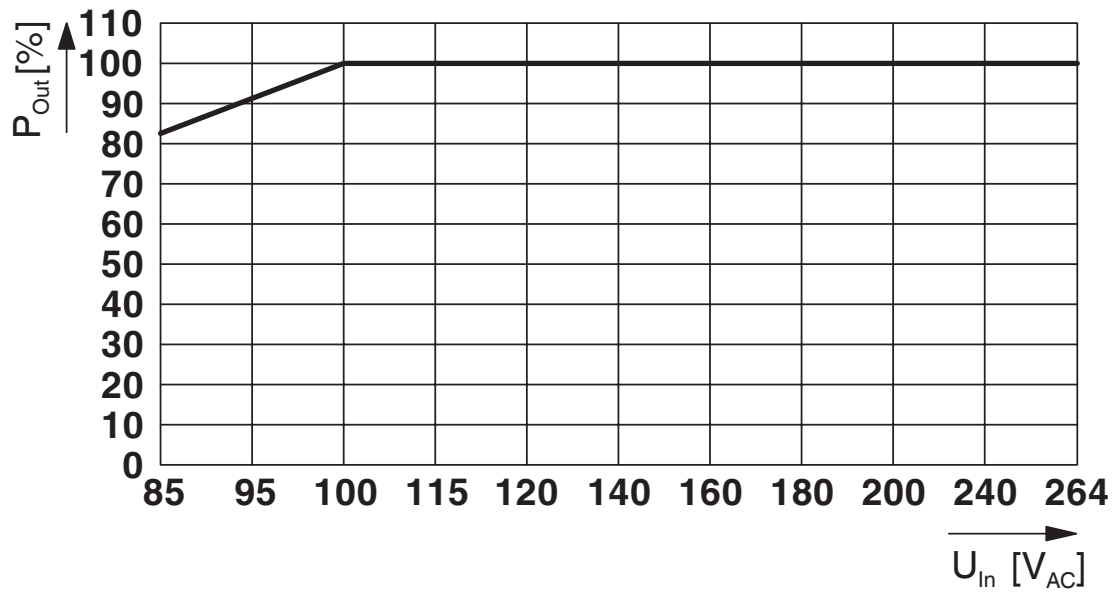

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Approvals



cULus Listed

Approval ID: FILE E 131881



cULus Listed

Approval ID: FILE E 131881



cULus Listed

Approval ID: FILE E 338991



cULus Listed

Approval ID: FILE E 338991

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Classifications

ECLASS

ECLASS-9.0	27040701
ECLASS-10.0.1	27040701
ECLASS-11.0	27040701

ETIM

ETIM 8.0	EC002540
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

Power supply unit - ESSENTIAL- PS/1AC/24DC/120W/EE



2910586

<https://www.phoenixcontact.com/za/products/2910586>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 10; For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (Pty) Ltd.
36 Lyn Road P.O. Box 916 ZA-Ferndale 2160

+27/11/801-8200
info@phoenixcontact.co.za