


## VPU AC II 0 300/50

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

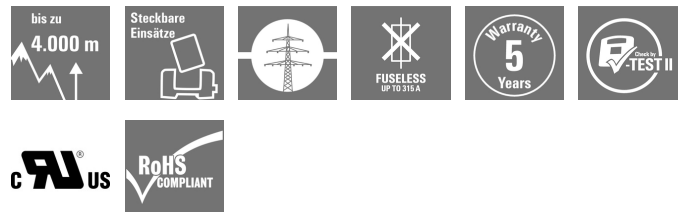

In the event of a defective arrester, you can easily reorder this spare arrester, replace the defective arrester and thus restore protection.

### General ordering data

Version	Spare arrester, Surge protection, $U_p(L/N-PE) \leq 1.5$ kV
Order No.	<a href="#">2591010000</a>
Type	VPU AC II 0 300/50
GTIN (EAN)	4050118599923
Qty.	1 Stück

## VPU AC II O 300/50

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technische Daten

### Dimensions and weights

Depth	64 mm	Depth (inches)	2,52 inch
Height	45 mm	Height (inches)	1,772 inch
Width	18 mm	Width (inches)	0,709 inch
Net weight	0,64 g		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Operating temperature, min.	-40 °C	Operating temperature, max.	85 °C
Humidity	5 - 95% rel. humidity		

### Rated data UL

Ambient temperature (operational), max.	85 °C	Rated Voltage $U_N$	240 V
VPR (L/N-PE)	900 V	MCOV (L/N-PE)	300 V
SCCR	150 kA	$I_n$	20 kA
Category	SPD TYPE 1CA	Ambient temperature (operational), min.	-40 °C
Certificate No. (cURus)	E35426 1	VPR (L-PE)	900 V
Voltage type	AC		

### General data

Colour	orange	Operating altitude	≤ 2000 m
Optical function display	green = OK; red = arrester is defective - replace	Protection degree	IP20 in installed state
Rail	TS 35	Segment	Power distribution
UL 94 flammability rating	V-0	Version	Surge protection

### Rated data IEC / EN

Combined pulse $U_{OC}$	6 kV	Discharge current $I_{max}$ (8/20 $\mu$ s) wire-PE	50 kA
Energy coordination (≤10 m)	Type II, Type III	Follow-on current extinguishing capability $I_{fi}$	Follow current need not be taken into account
Frequency range, max.	60 Hz	Frequency range, min.	50 Hz
Leakage current at $U_n$	0,3 mA	Max. continuous voltage, $U_c$ (AC)	300 V
Number of poles	1	Protection level $U_p$ (typ.)	≤ 1,5 kV
Rated voltage (AC)	230 V	Requirements category acc. to IEC 61643-11	Type II/III
Requirements class, acc. to EN 61643-11	T2	Response time	≤ 25 ns
SPD type	T2, T3	Standards	IEC61643-11, EN61643-11, UL 1449
Voltage type	AC		

### Connection data

Type of connection	Plug-in connection
--------------------	--------------------

### Guarantee

Time interval	5 years
---------------	---------

## VPU AC II 0 300/50

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technische Daten

### Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90

### Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E354261

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">EAC VPU SERIES</a> <a href="#">EU_Konformitätserklärung / EU_Declaration_of_Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Tender specification	<a href="#">Ausschreibungstext DE</a> <a href="#">Tenderspecification EN</a>
User Documentation	<a href="#">Beipackzettel / Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

Zeichnungen

Electric symbol

