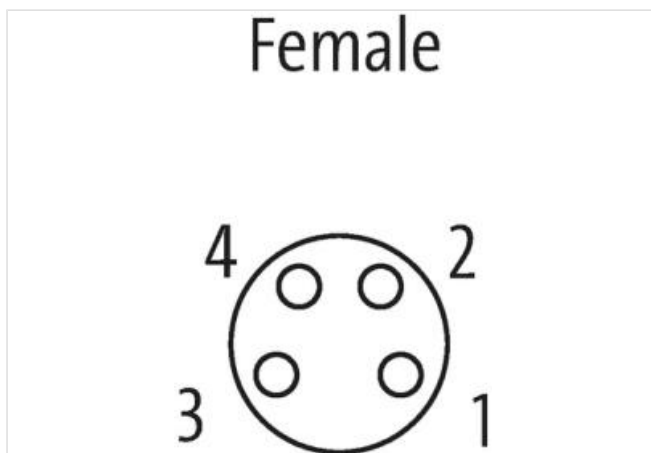
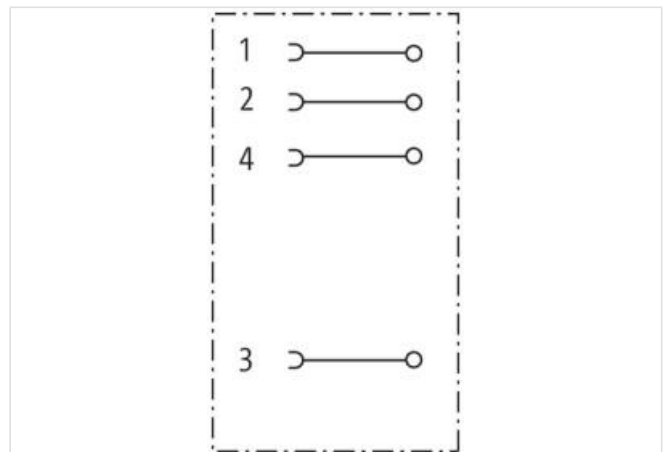


M8 female 0° A-cod. screw terminal4-pol., 0,14 - 0.5mm², 2,5 - 5mm


Female straight

M8, 4-pole

Screw terminal

Connection cross section: 0.14...0.5 mm²[Link to Product](#)**Illustration**

Product may differ from Image

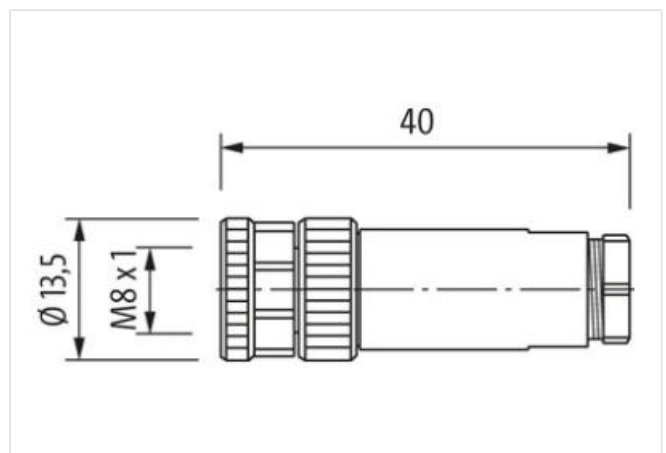**Technical Data**

Operating voltage	max. 50 V AC/60 V DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
No. of poles	4-pole
Material group	III
Coding	A-coded

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-25

Murrelektronik GmbH | Falkenstr. 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Connection cross section	0.14...0.5 mm ²
Sealing range (cable Ø)	2.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Compression gland	M8 (AF12,5)
Isolation resistance	> 100 MOhm
Over voltage category	II

General data

Material contact	Brass, gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material housing	PBT
Material contact carrier	PA66
Connection	Screw terminal
Dimensions H×W×D	45×12×12 mm