

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/15ADC



Current: 15 A

Output rating: 360 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)

Illustration

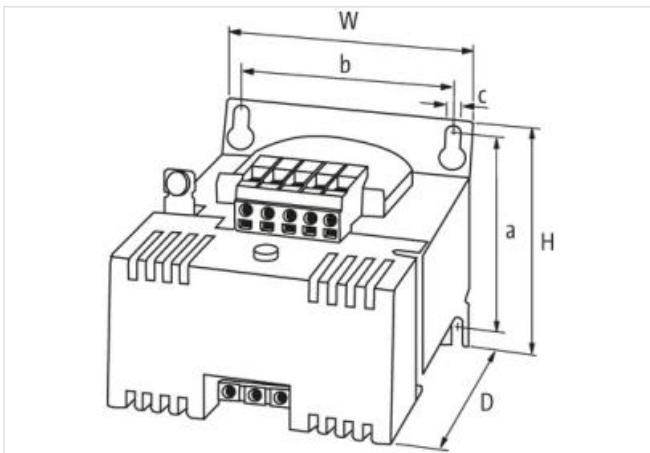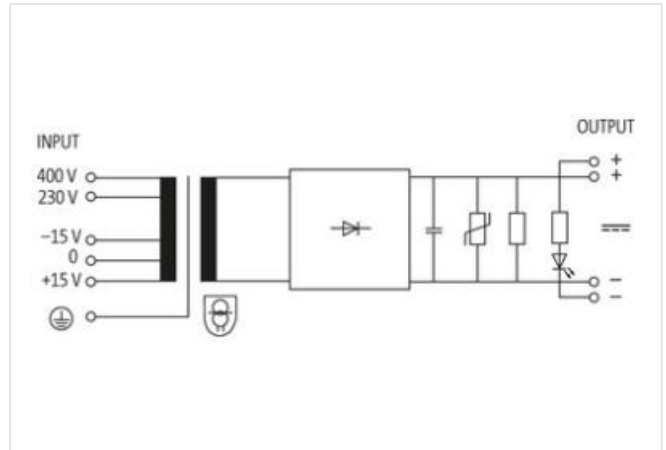

Product may differ from Image



Input

Input voltage	230/400 ±15 V AC
Input fuse (external)	4 AT (230 V AC); 2.5 AT (400 V AC)
Input current	2.8 A (230 V AC); 1.65 A (400 V AC)
Frequency	50...60 Hz

Output

Output voltage	24 V DC (SELV)
----------------	----------------

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-05

Output current (Ta 60/40 °C)	max. 15 A (230 V AC); 18 A (400 V AC)
------------------------------	---------------------------------------

Output suppression	LED, VDR and smoothing capacitor
--------------------	----------------------------------

Ripple	max. 5% eff/rms
--------	-----------------

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
-----------	---

Mounting method	Key-hole mounting
-----------------	-------------------

Temperature range	-20...+60 °C, no condensation
-------------------	-------------------------------

Fixing centers a×b×c	126×104×6.5 mm
----------------------	----------------

Dimensions H×W×D	138.5×135×181.5 mm
------------------	--------------------