

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/15ADC

Current: 15 A



Output rating: 360 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

For any mounting position at vertical wall.

[Link to Product](#)

Illustration

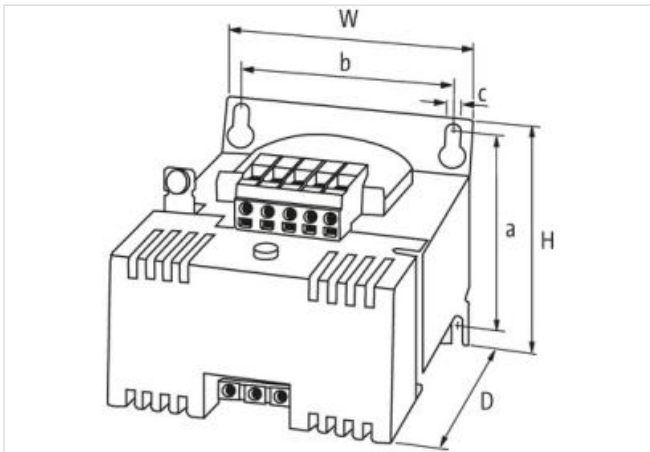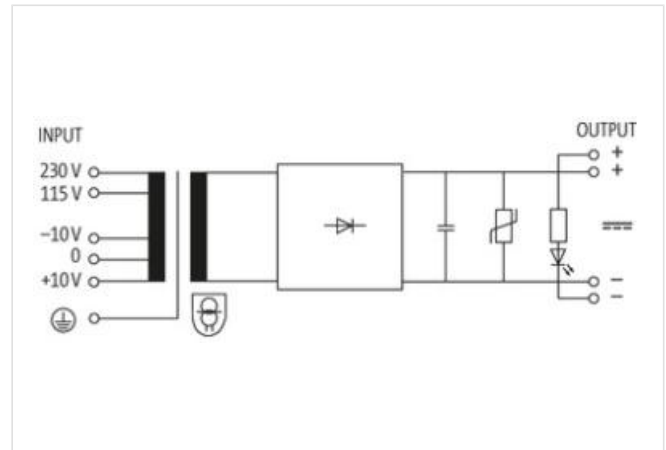

Product may differ from Image

Input

Input voltage	115/230 V AC \pm 10 V AC
Input fuse (external)	8 AT (115 V AC); 4 AT (230 V AC)
Input current	5.6 A (115 V AC); 2.8 A (230 V AC)
Frequency	50...60 Hz

Output

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 15 A (115 V AC); 18 A (230 V AC)
Output suppression	LED, VDR and smoothing capacitor
Ripple	max. 5% eff/rms

General data

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-06

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	126×104×6.5 mm
Dimensions H×W×D	138.5×135×181.5 mm