MURR ELEKTRONIK
stay connected

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/20ADC

Current: 20 A
Output rating: 480 W
This power supply units meet the (EN 61000-3-2) standard for harmonic current.
For any mounting position at vertical wall.

Link to Product

Illustration

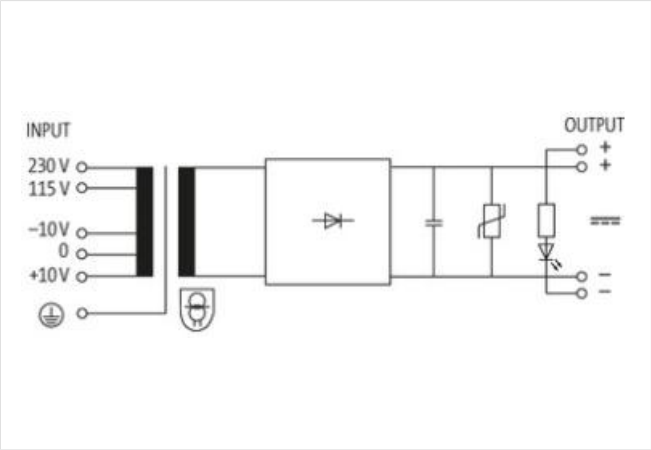

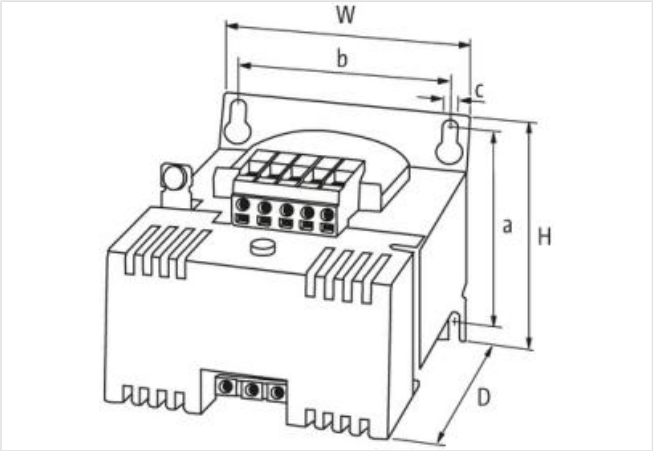

Product may differ from Image

Input	
Input voltage	115/230 V AC ±10 V AC
Input fuse (external)	10 A (T) (115 V AC); 5 A (T) (230 V AC)
Input current	7.4 A (115 V AC); 3.7 A (230 V AC)
Frequency	50...60 Hz
Output	
Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 20 A (115 V AC); 24 A (230 V AC)
Output suppression	LED, VDR and smoothing capacitor
Ripple	max. 5% eff/rms
General data	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-06

Standards	EN 55011 A
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	102×135×7 mm
Dimensions H×W×D	127×174×213.5 mm

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-06