

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/7,5ADC



Current: 7.5 A

Output rating: 180 W
without DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current.
For any mounting position at vertical wall.

Link to Product

Illustration

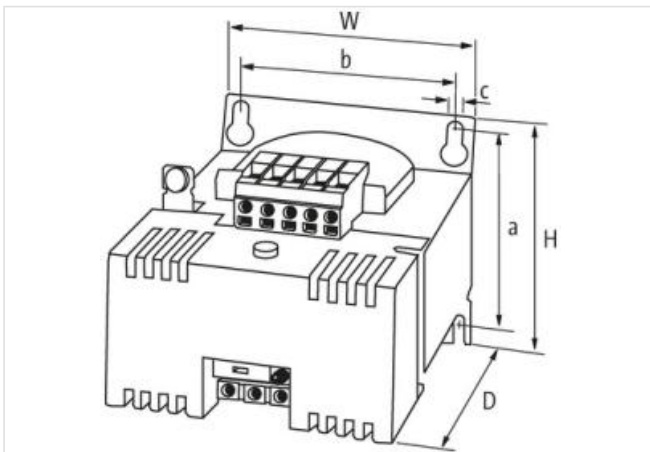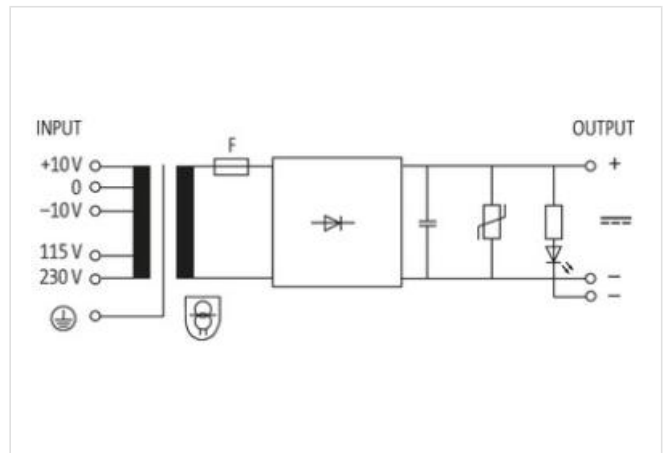

Product may differ from Image

Input

Input voltage	115/230 V AC \pm 10 V AC
Input fuse (external)	3 AT (115 V AC); 1.5 AT (230 V AC)
Input current	2.84 A (115 V AC); 1.42 A (230 V AC)
Frequency	50...60 Hz

Output

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 7.5 A (115 V AC); 9 A (230 V AC)
Output suppression	LED, VDR and smoothing capacitor
Output fuse	15 A (automotive fuse FKS)

Ripple max. 5% eff/rms

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	86.5×90×5.8 mm
Dimensions H×W×D	103×105×150.5 mm