

**EVOLUTION+ POWER SUPPLY 3-PHASE,**

IN: 360-520VAC OUT: 22-28V/5ADC

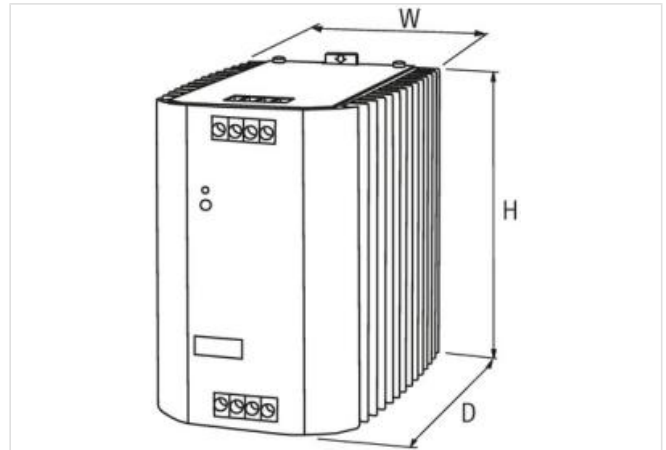
INPUT: 3× 360...520 V AC / 480...745 V DC

OUTPUT: 22...28 V DC

Current: 5 A

[Link to Product](#)**Illustration**

Product may differ from Image

**Input**

Input voltage	3× 324...572 V AC/480...745 V DC
Primary fusing external	3× 10 A (T)
Input current	3× 0.45 A
Inrush current after 1 ms	max. 10 A
Frequency	50..60 Hz

**Output**

Output voltage	24 V DC (SELV), ±1%; 22...28 V adjustable
Power Boost	I <sub>out</sub> N × 150% (min. 4 s)
LED display	LED (green): OK; LED (red): overload
Alarm output	electronic relay max. 30 V DC/0.1 A, group alarm
Output current	5 A (+55 °C); 3 A (+70 °C)
Mains failure bridging time	min. 30 ms (400 V AC)
Ripple	max. 50 mV eff/rms
Spikes	max. 100 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	max. 5 units/max. 2 units

**General data**

Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2, SEMI F47
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+70 °C (storage temperature -40...+85 °C)
Protection	Varnished board
Relative humidity	5...95%, no condensation
Protection	IP20
Efficiency	86% (3× 400 V AC); 86% (3× 520 V AC)
Connection	Screw terminals
Dimensions H×W×D	132×83×98 mm

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-13

Murrelektronik GmbH | Falkenstr. 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

