

MSVD POWER SOCKET NEMA (GFCI)

Mounting rail

USA (2x NEMA-GFCI 5-20)

(Ground Fault Circuit Interrupter)

Screw terminals


Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

[Link to Product](#)

Illustration



Product may differ from Image

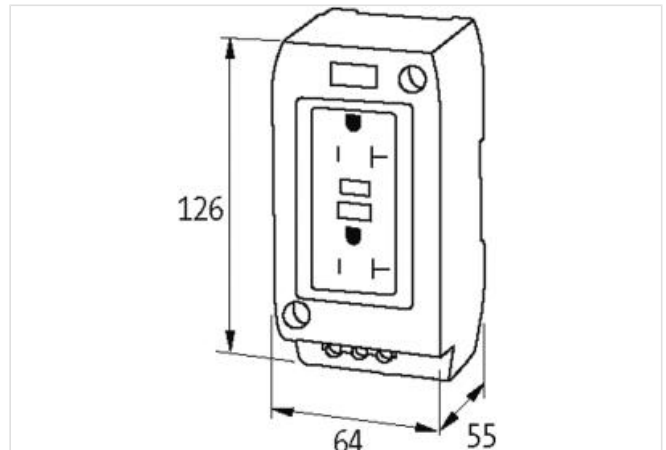

Technical Data

Operating voltage	125 V AC
Operating current	max. 20 A
Trip level	4...6 mA

General data

Mounting method	DIN-rail mountable (EN 60715)
Connection	Screw terminals: max. 6 mm ²
Dimensions H×W×D	126×64×55 mm