



# Relay Module

## HiC5861Y1


- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Logic input 19 V DC ... 27.6 V DC
- Relay contact output for de-energized to safe function
- Test pulse immunity
- Up to SIL 3 acc. to IEC/EN 61508
- Up to PL e acc. to EN/ISO 13849

# CE SIL3 PL e

## Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device is a relay module that is suitable for safely switching applications of a load circuit. The device isolates load circuits up to 30 V and the 24 V control circuit. The de-energized to safe (DTS) function is permitted for SIL 3 and PL e applications. The relays are of diverse design, but have a common effect on the individual switching output. For testing of the relays, test terminals can be used. The test mode will be indicated by a LED according to NAMUR NE44. The output is protected against contact welding by a fuse.

## Connection

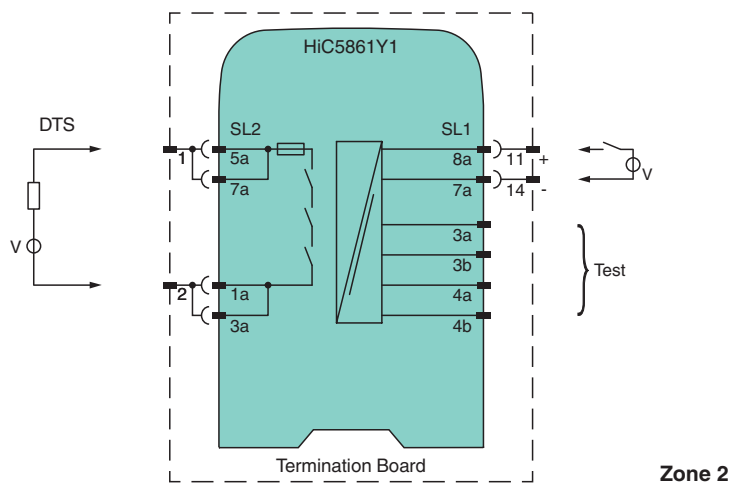

Zone 2

## Technical Data

General specifications	
Signal type	Digital Output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Supply	
Connection	loop powered
Rated voltage	U <sub>r</sub> 19 ... 30 V DC loop powered
Power dissipation	< 1.3 W
Power consumption	< 1.3 W

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 303120\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

## Technical Data

Input	
Connection side	control side
Connection	Input SL1: 8a(+), 7a(-) ; test input SL1: 3a(-), 3b(+), 4a(+), 4b(+)
Pulse/Pause ratio	150 ms / 150 ms
Test pulse length	max. 4 ms from DO card
Test input	see functional safety manual
Signal level	0-signal: -5 ... 5 V 1-signal: 19 ... 27.6 V
Rated voltage	$U_r$ 19 ... 27.6 V loop powered
Rated current	$I_r$ 0-signal: typ. 1.6 mA at 1.5 V DC; typ. 8 mA at 3 V DC (maximum leakage current DO card) 1-signal: $\geq 36$ mA (minimum load current DO card)
Output	
Connection side	field side
Connection	SL2: 5a, 7a; 1a, 3a
Contact loading	253 V AC/2 A/cos $\phi$ 0,7; 30 V DC/2 A resistive load
Minimum switch current	10 mA / 24 V DC
Energized/De-energized delay	150 ms / 150 ms
Mechanical life	2 x 10 <sup>7</sup> switching cycles
Fuse rating	3.15 A
Transfer characteristics	
Switching frequency	< 3 Hz
Galvanic isolation	
Input/Output	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 253 V <sub>eff</sub>
Output/Output	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 253 V <sub>eff</sub>
Indicators/settings	
Display elements	LEDs
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Low voltage	
Directive 2014/35/EU	EN 61010-1:2010
Machinery Directive	
Directive 2006/42/EC	EN 62061:2005 , EN/ISO 13849-1:2008
Conformity	
Electromagnetic compatibility	NE 21:2012 , EN 61326-3-1:2008 , EN 61326-3-2:2008
Degree of protection	IEC 60529:2013
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F) Observe the temperature range limited by derating, see section derating.
Mechanical specifications	
Degree of protection	IP20
Mass	approx. 100 g
Dimensions	12.5 x 106 x 128 mm (0.5 x 4.2 x 5.1 inch) (W x H x D)
Mounting	on termination board
Coding	no pin trimmed For further information see system description.
Data for application in connection with hazardous areas	
Certificate	PF 17 CERT 4312 X
Marking	Ⓔ II 3G Ex nC ec IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-7:2015 , EN 60079-15:2010
General information	

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 303120\_eng.pdf


## Technical Data

Supplementary information

Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

## Assembly

Front view

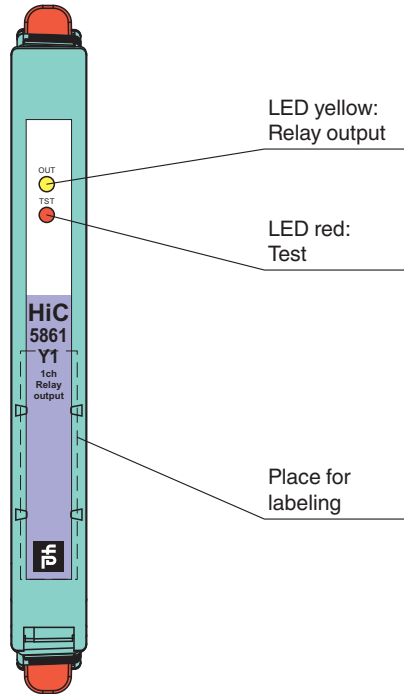

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 303120\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
[www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

USA: +1 330 486 0002  
[pa-info@us.pepperl-fuchs.com](mailto:pa-info@us.pepperl-fuchs.com)


Germany: +49 621 776 2222  
[pa-info@de.pepperl-fuchs.com](mailto:pa-info@de.pepperl-fuchs.com)

Singapore: +65 6779 9091  
[pa-info@sg.pepperl-fuchs.com](mailto:pa-info@sg.pepperl-fuchs.com)


 **PEPPERL+FUCHS**

**Characteristic Curve**

**Derating**

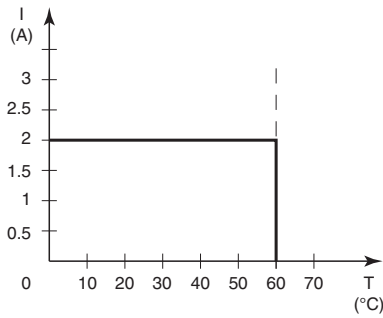


**Derating for Zone 2 Application**

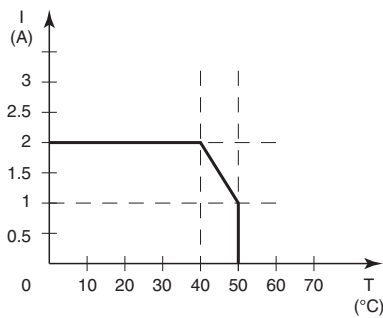

**Characteristic Curve**

**Maximum Switching Power of Output Contacts**

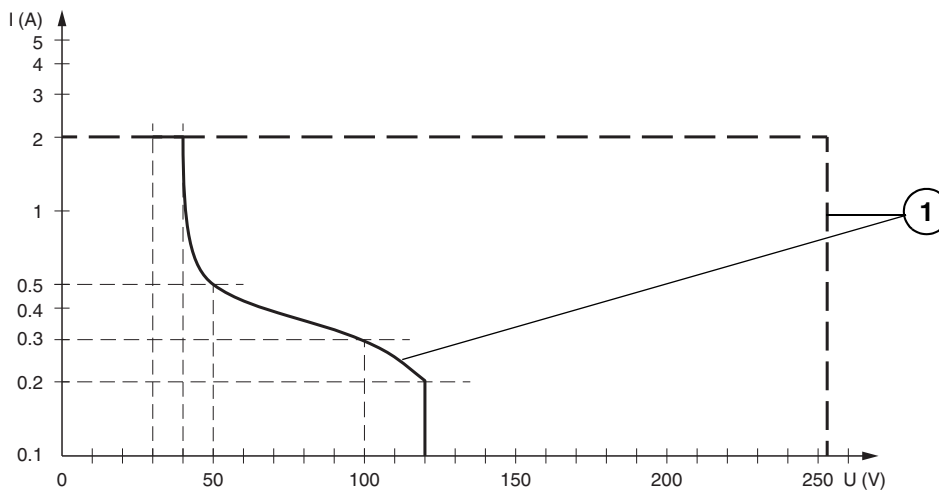

- Resistive load DC
- - - Resistive load AC
- 1 max.  $45 \times 10^4$  switching cycles

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 303120\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".