


# RA2e

**RA2e INTERNATIONALLY APPROVED, Ex eb, EXPLOSIVE ATMOSPHERE CABLE GLAND**

**FOR ALL TYPES OF UNARMoured & BRAIDED CABLES**

- O-ring face seal as standard
- 10mm thread length on sizes 32 and below
- Displacement type seal
- Deluge protected
- -60°C to +130°C
- Internationally marked, UKEX, IECEx and ATEX

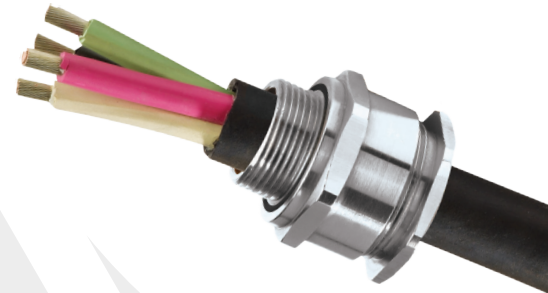


<b>IP66</b>	<b>IP67</b>	<b>IP68</b>
<b>DELUGE PROTECTED</b>		<b>+130°C</b> ↑ <b>-60°C</b>
<b>Ex eb</b>	<b>Ex ta</b>	<b>Ex nR</b>

TECHNICAL DATA	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class B
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass and Stainless Steel only
INGRESS PROTECTION RATING**	IP66, IP67 and IP68***
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium
SEAL MATERIAL	CMP SOLO LSF Halogen Free Thermoset Elastomer
CABLE TYPE	Unarmoured and Braided when terminated inside enclosure
SEALING TECHNIQUE	CMP Displacement Seal
SEALING AREA(S)	Cable Outer Sheath

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1321X, CML18ATEX4313X	IECEx CERTIFICATE	IECEx CML 18.0179X
UKEX CERTIFICATE	CML 21UKEX1245X, CML 21UKEX4246X		
CODE OF PROTECTION	Ⓜ II 2G TD Ex eb IIC Gb, Ex ta IIIC Da Ⓜ II 3G, Ex nR IIC Gc	CODE OF PROTECTION	Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da
COMPLIANCE STANDARDS	EN 60079-0,7,15,31	COMPLIANCE STANDARDS	IEC 60079-0,7,15,31
EAC CERTIFICATE	TC RU C-GB.AA87.B.00487	ECAS CERTIFICATE	20-02-05362
KCS KOSHA CERTIFICATE ATE	13-GA4B0-0748X; 13_GA4B0_0749X; 13_GA4B0_0750X; 14_GA4B0_0251X		
CCOE / PESO (INDIA) CERTIFICATE	P444949		
NEPSI CERTIFICATE	GYJ18.1249X		
MARINE APPROVALS	DNV: TAE000000Y, ABS: 16-LD1478091PDA, LRS: 01/00172; BV: 43180		

\* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444 \*\* When CMP installation accessories are used. Refer to [www.cmp-products.com](http://www.cmp-products.com) for further information.  
\*\*\* IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request

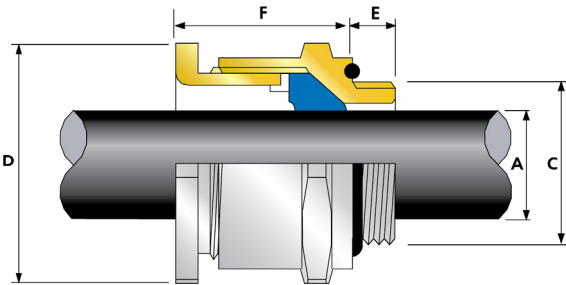

COMBINED ORDERING REFERENCE (*BRASS METRIC)			AVAILABLE ENTRY THREADS 'C' (ALTERNATIVE METRIC THREAD LENGTHS AVAILABLE)					OVERALL CABLE DIAMETER 'A'		ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
			STANDARD			OPTION								
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH (METRIC) 'E'	NPT	THREAD LENGTH (NPT) 'E'	NPT	MIN	MAX	MAX	MAX			
16	RA2E	1RA	M16	10.0	-	-	-	3.2	8.7	27.0	29.7	29.9	PVC05	0.060
20S16	RA2E	1RA	M20	10.0	1/2"	19.9	3/4"	3.2	8.7	27.0	29.7	26.0	PVC05	0.070
20S	RA2E	1RA	M20	10.0	1/2"	19.9	3/4"	6.1	11.7	27.0	29.7	26.0	PVC05	0.060
20	RA2E	1RA	M20	10.0	1/2"	19.9	3/4"	6.5	14.0	27.0	29.7	27.7	PVC05	0.070
25	RA2E	1RA	M25	10.0	3/4"	20.2	1"	11.1	20.0	36.0	39.6	35.5	PVC09	0.130
32	RA2E	1RA	M32	10.0	1"	25.0	1 1/4"	17.0	26.3	41.0	45.1	35.1	PVC10	0.150
40	RA2E	1RA	M40	15.0	1 1/4"	25.6	1 1/2"	23.5	32.2	50.0	55.0	35.1	PVC13	0.200
50S	RA2E	1RA	M50	15.0	1 1/2"	26.1	2"	31.0	38.2	60.0	66.0	33.0	PVC18	0.260
50	RA2E	1RA	M50	15.0	2"	26.9	2 1/2"	35.6	44.0	60.0	66.0	37.3	PVC18	0.270
63S	RA2E	1RA	M63	15.0	2"	26.9	2 1/2"	41.5	49.9	75.0	82.5	33.5	PVC23	0.430
63	RA2E	1RA	M63	15.0	2 1/2"	39.9	3"	47.2	55.9	75.0	82.5	36.2	PVC23	0.400
75S	RA2E	1RA	M75	15.0	2 1/2"	39.9	3"	54.0	61.9	90.0	99.0	34.1	PVC27	0.520
75	RA2E	1RA	M75	15.0	3"	41.5	3 1/2"	61.1	67.9	89.0	97.9	40.9	PVC27	0.500
90	RA2E	1RA	M90	24.0	3 1/2"	42.8	4"	66.6	79.9	108.0	118.8	60.3	PVC31	1.600
100	RA2E	1RA	M100	24.0	3 1/2"	42.8	4"	76.0	91.0	123.0	135.3	57.2	LSF33	1.780
115	RA2E	1RA	M115	24.0	4"	44.0	5"	86.0	97.9	133.4	146.7	67.3	LSF34	2.670
130	RA2E	1RA	M130	24.0	5"	46.8	-	97.0	114.9	152.4	167.6	74.7	LSF35	3.800

\*For material options add the following suffix to the ordering reference; Brass (no suffix required); Nickel Plated Brass '5'; 316 Grade Stainless Steel '4'; Copper Free Aluminium '1'  
For NPT options add the following digits to the material suffix; 1/2" = 31; 3/4" = 32; 1" = 33; 1 1/4" = 34; 1 1/2" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32RA2E1RA534 = Nickel Plated Brass 1 1/4" NPT, 50SRA2E1RA035 = Brass 1 1/2" NPT, 25RA2E1RA432 = Stainless Steel 3/4" NPT, 20RA2E1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary.