

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe coupling relay for SIL 3 high- and low-demand applications, couples digital output signals to the periphery, one enabling current path, one signal contact, module for safe state off applications, test pulse filter, fuse, plug-in screw connection, width: 17.5 mm

## Your advantages

- Narrow 17.5 mm housing
- Up to SIL 3 in accordance with IEC 61508
- With built-in, replaceable fuse in the enabling current path
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- Long service life thanks to filtering of controller test pulses
- Force-guided contacts in accordance with EN 50205
- 1 enabling current path
- Couples digital output signals from failsafe controllers to I/O devices (valves, etc.) for electrical isolation and power adaptation

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2981978             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | DN01                |
| Product key                          | DNA161              |
| Catalog page                         | Page 254 (C-6-2019) |
| GTIN                                 | 4046356448352       |
| Weight per piece (including packing) | 160 g               |
| Weight per piece (excluding packing) | 155 g               |
| Customs tariff number                | 85364190            |
| Country of origin                    | DE                  |

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Technical data

### Product properties

|                         |  |
|-------------------------|--|
| Product type            | Coupling relay   |
| Product family          | PSRclassic   |
| Application             | Safe switch off  |
|                         | High demand  |
|                         | Low demand   |
| Mechanical service life | 10x 10 <sup>6</sup> cycles   |
| Relay type              | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

### Electrical properties

|   |                       |
|---|-----------------------|
| Maximum power dissipation for nominal condition | 2.4 W                 |
| Nominal operating mode                          | 100% operating factor |

#### Air clearances and creepage distances between the power circuits

|                                |   |
|--------------------------------|---|
| Rated insulation voltage       | 250 V AC  |
| Rated surge voltage/insulation | Safe isolation, reinforced insulation 6 kV between the control circuits (A1/A2), (21/22), (13/14) |

### Input data

#### General

|  |  |
|--|--|
| Rated control circuit supply voltage $U_S$ | 24 V DC -15 % / +10 %                                    |
| Power consumption at $U_S$                 | typ. 1.32 W  |
| Rated control supply current $I_S$         | typ. 55 mA   |
| Input voltage range                        | 20.4 V DC ... 26.4 V DC                                  |
| Inrush current                             | max. 100 mA  |
| Filter time                                | max. 5 ms (at A1 in the event of voltage dips at $U_S$ ) |
|  | max. 2 ms (Test pulse width; high test pulse at A1/A2)   |
|  | ≥ 100 ms (Test pulse width; high test pulse at A1/A2)    |
|  | Test pulse rate = 80 x Test pulse width                  |
|  | max. 5 ms (Test pulse width; low test pulse at A1/A2)    |
|  | ≥ 50 ms (Test pulse rate; low test pulse at A1/A2)       |
| Test pulse rate = 15 x Test pulse width    |  |
| Typ. starting time with $U_S$              | 50 ms  |
| Typical release time                       | 50 ms  |
| Recovery time                              | 1 s  |
| Maximum switching frequency                | 0.5 Hz   |
| Protective circuit                         | Surge protection; Suppressor diode, 33 V (A1 - A2)       |
| Operating voltage display                  | 1 x yellow LED   |

### Output data

|                        |                         |
|------------------------|-------------------------|
| Contact switching type | 1 enabling current path |
|------------------------|-------------------------|

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

|  |   |
|--|---|
|  | 1 confirmation current path                                     |
| Contact material                             | AgCuNi, + 0.2 µm Au   |
| Maximum switching voltage                    | 250 V AC/DC (N/O contact / N/C contact, observe the load curve) |
| Minimum switching voltage                    | 15 V AC/DC (N/O contact / N/C contact)                          |
| Limiting continuous current                  | 5 A (N/O contact, pay attention to the derating)                |
|  | 100 mA (N/C contact)  |
| Maximum inrush current                       | 5 A (N/O contact)   |
|  | 100 mA (N/C contact)  |
| Inrush current, minimum                      | 5 mA (N/O contact / N/C contact)                                |
| Sq. Total current                            | 25 A <sup>2</sup> (observe derating)                            |
| Interrupting rating (ohmic load) max.        | 120 W (24 V DC, τ = 0 ms, N/C contact: 2.4 W)                   |
|  | 192 W (48 V DC, τ = 0 ms, N/C contact: 4.8 W)                   |
|  | 162 W (60 V DC, τ = 0 ms, N/C contact: 6 W)                     |
|  | 66 W (110 V DC, τ = 0 ms, N/C contact: 11 W)                    |
|  | 60 W (220 V DC, τ = 0 ms, N/C contact: 22 W)                    |
|  | 1250 VA (250 V AC, τ = 0 ms, N/C contact: 25 VA)                |
| Maximum interrupting rating (inductive load) | 72 W (24 V DC, τ = 40 ms, N/C contact: 2.4 W)                   |
|  | 43 W (48 V DC, τ = 40 ms, N/C contact: 4.8 W)                   |
|  | 41 W (60 V DC, τ = 40 ms, N/C contact: 6 W)                     |
|  | 35 W (110 V DC, τ = 40 ms, N/C contact: 11 W)                   |
|  | 48 W (220 V DC, τ = 40 ms, N/C contact: 22 W)                   |
| Switching capacity                           | min. 75 mW  |
| Switching capacity (3600/h cycles)           | 5 A (24 V (DC13))   |
|  | 5 A (230 V (AC15))  |
| Output fuse                                  | 5 A T fuse (N/O contact)  |
|  | 150 mA Fast-blow (N/C contact)                                  |

## Connection data

### Connection technology

|           |     |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

### Conductor connection

|                                  |   |
|----------------------------------|---|
| Connection method                | Screw connection                            |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 12                                   |
| Stripping length                 | 7 mm  |
| Screw thread                     | M3  |

## Dimensions

|        |          |
|--------|----------|
| Width  | 17.5 mm  |
| Height | 99 mm    |
| Depth  | 114.5 mm |

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Material specifications

|                  |                   |
|------------------|-------------------|
| Color (Housing)  | yellow (RAL 1018) |
| Housing material | Polyamide         |

## Characteristics

### Safety data

|               |   |
|---------------|---|
| Stop category | 0 |
|---------------|---|

### Safety data: EN ISO 13849

|                        |  |
|------------------------|--|
| Category               | 4 (Diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 99\%$ ) |
| Performance level (PL) | e (Diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 99\%$ ) |

### Safety data: EN 50156

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

### Safety data: IEC 61508 - High demand

|                              |  |
|------------------------------|--|
| Safety Integrity Level (SIL) | 3 (max. 10% of the entire SIL; diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 90\%$ ) |
|------------------------------|--|

### Safety data: IEC 61508 - Low demand

|                              |  |
|------------------------------|--|
| Safety Integrity Level (SIL) | 3 (max. 10% of the entire SIL; diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 90\%$ ) |
|------------------------------|--|

### Safety data: EN IEC 62061

|                              |  |
|------------------------------|--|
| Safety Integrity Level (SIL) | 3 (max. 10% of the entire SIL; diagnostic coverage (DC) of the control unit at A1/A2 must be $\geq 90\%$ ) |
|------------------------------|--|

## Environmental and real-life conditions

### Ambient conditions

|  |   |
|--|---|
| Degree of protection                           | IP20  |
| Min. degree of protection of inst. location    | IP54  |
| Ambient temperature (operation)                | -20 °C ... 55 °C (observe derating)                 |
| Ambient temperature (storage/transport)        | -40 °C ... 70 °C                                    |
| Maximum altitude                               | $\leq 2000$ m (Above sea level)                     |
| Max. permissible humidity (storage/transport)  | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock  | 15g   |
| Vibration (operation)                          | 10 Hz ... 150 Hz, 2g                                |

## Approvals

### CE

|             |              |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

## Standards and regulations

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Air clearances and creepage distances between the power circuits

|                       |             |
|-----------------------|-------------|
| Standards/regulations | IEC 60664-1 |
|-----------------------|-------------|

## Mounting

|                   |                   |
|-------------------|-------------------|
| Mounting type     | DIN rail mounting |
| Mounting position | any               |
| Connection method | Screw connection  |


# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay

2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Drawings

Circuit diagram

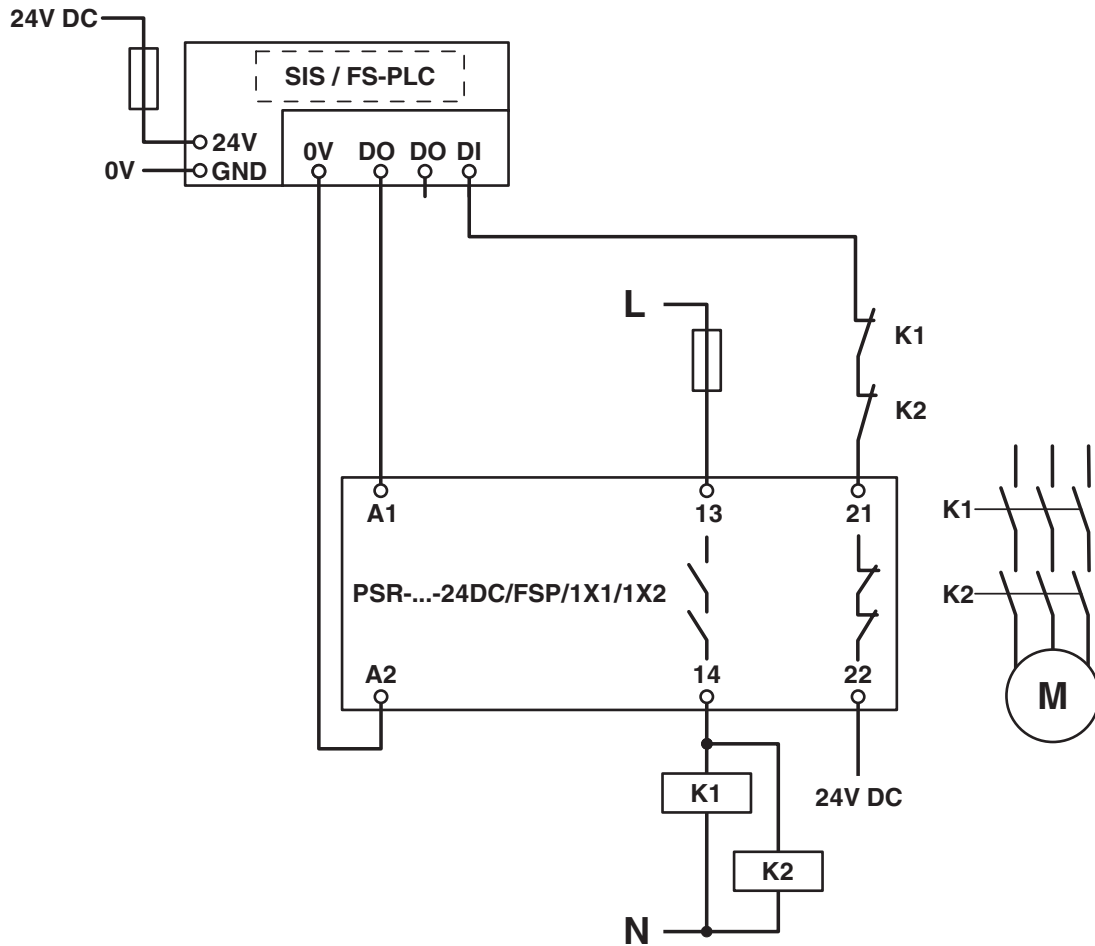


# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay




2981978

<https://www.phoenixcontact.com/us/products/2981978>

Circuit diagram

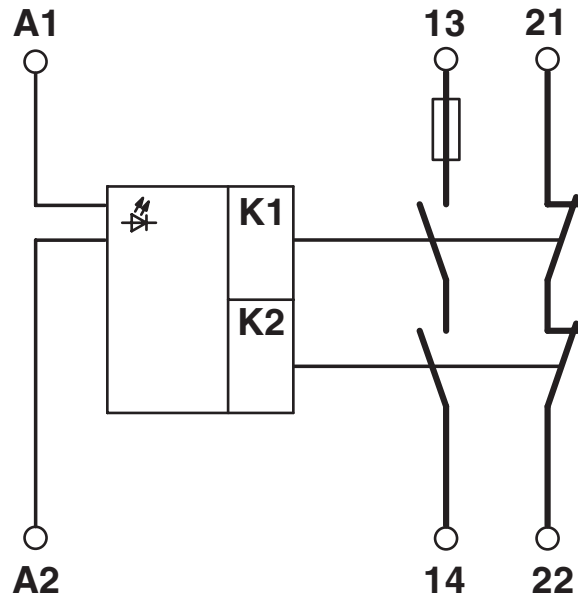

Circuit diagram

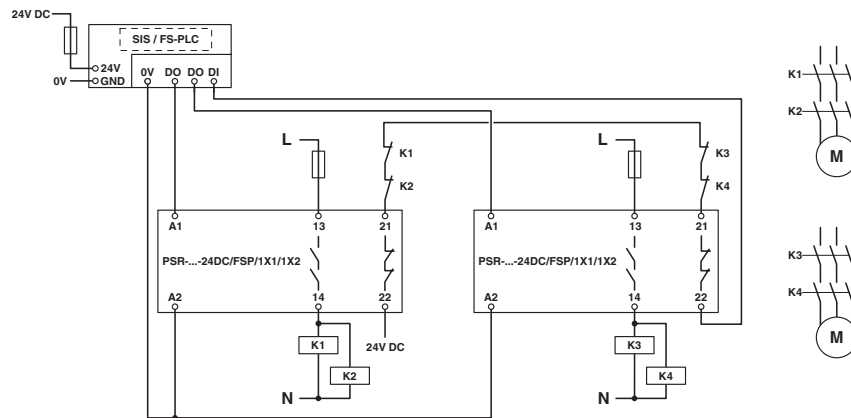


# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay

2981978

<https://www.phoenixcontact.com/us/products/2981978>

Application drawing

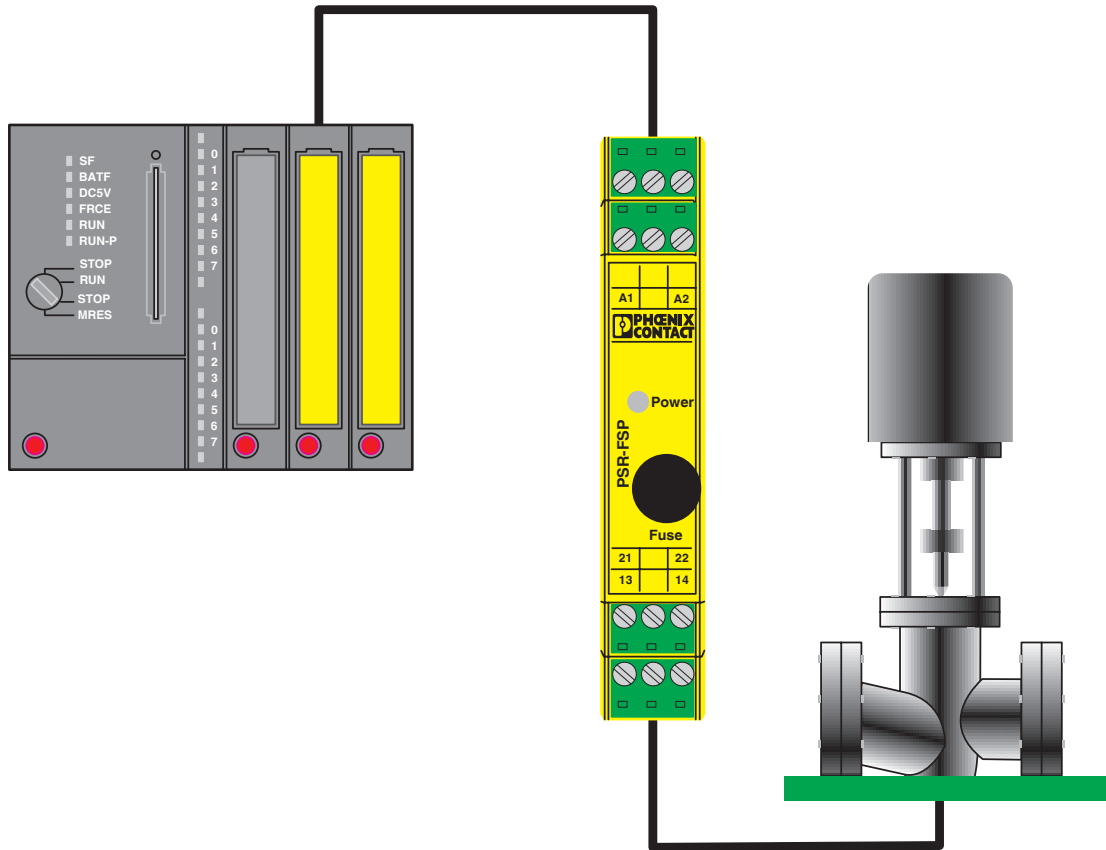

Example of electrical isolation of a safety PLC output from the field.



# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2981978>



**EAC**

Approval ID: RU C-DE.A\*30.B.01082



**DNV GL**

Approval ID: TAA00002UC



**UL Listed**

Approval ID: FILE E 140324



**cUL Listed**

Approval ID: FILE E 140324



**Functional Safety**

Approval ID: 968/EZ 365.10/22

**cULus Listed**

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27371819 |
| ECLASS-13.0 | 27371819 |
| ECLASS-12.0 | 27371819 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

# PSR-SCP- 24DC/FSP/1X1/1X2 - Coupling relay



2981978

<https://www.phoenixcontact.com/us/products/2981978>

## Environmental product compliance

|            |  |
|------------|--|
| REACH SVHC | Lead 7439-92-1   |
| China RoHS | Environmentally Friendly Use Period = 50 years   |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)