

**KLIPPON CS K51-2**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com



On-site control with Ex-certified Klippon® Control Station: small command and signalling devices. Approved operating and display elements in stainless steel, aluminium or polyester enclosures. You want to control and safeguard your work processes in hazardous areas. For on-site control - approved Klippon® enclosure solutions with control and display elements.

**General ordering data**

Version	Klippon Control Station (control and signalling device), Control / signalling device, KLIPPON K51 EX, Aluminium AISi12, Pushbutton - green, Pushbutton - red, EMERGENCY-STOP pushbutton with yellow, contrasting label, 2 NO contacts, 2 NC contact, positive opening contacts, -55 °C... +55 °C, IP54, IP66
Order No.	<a href="#">1537570000</a>
Type	KLIPPON CS K51-2
GTIN (EAN)	4050118341799
Qty.	1 Stück
Cable gland	<a href="#">1460070000</a>
Reference product	<a href="#">9526940000</a>

Erstellungs-Datum 06:32:44 CEST Ngày 05 tháng 6 năm 2024

## KLIPPON CS K51-2

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technische Daten

### Dimensions and weights

Depth	81 mm	Depth (inches)	3,189 inch
Depth with add-on components	119 mm	Height	220 mm
Height (inches)	8,661 inch	Width	120 mm
Width (inches)	4,724 inch	Net weight	1.970 g

### Temperatures

Ambient temperature	-55 °C...+55 °C
---------------------	-----------------

### Certificate numbers enclosure

Certificate No. (ATEX)	TUEV14ATEX7606X	Certificate No. (IECEX)	IECEXITA 14.0013X
Certificate no. Terminal Box (ATEX)	TÜV 14 ATEX 7606 X	Certificate no. Terminal Box (IECEX)	IECEX ITA 14.0013X
Certificate no. Terminal Box (INMETRO)	LMP 21.0019X		

### General information

1 Position in enclosure	Pushbutton - green	2 Position in enclosure	Pushbutton - red
3 Position in enclosure	EMERGENCY-STOP pushbutton with yellow, contrasting label	Contact design	2 NO contacts, 2 NC contact, positive opening contacts
Operating voltage, max.	400 V	Operating current at 40°C ambient temperature, max.	1.5 mm <sup>2</sup> - T6 10 A, 1.5 mm <sup>2</sup> - T5 16 A, 2.5 mm <sup>2</sup> - T6 16 A
Operating current at 55°C ambient temperature, max.	1.5 mm <sup>2</sup> - T4 16 A, 1.5 mm <sup>2</sup> - T5 10 A, 2.5 mm <sup>2</sup> - T5 16 A	Actuators	Pushbutton, EMERGENCY STOP pushbutton
Actuator colour	green, red	Drill holes side B	1 x M25
Lid attachment	Torx®-20 slothead screws	Seal material of operating and display elements	EPDM
Enclosure seal material	Silicone (VMQ)	Torque for lid screws	2,5 Nm
Earth stud torque	2,5 Nm	External earth	M4 earthing studs, stainless steel
Internal earth	Earth terminal	Marking	II 2 G Ex d e IIC T <sup>+</sup> Gb, II 2 D Ex tb IIIC T <sup>+</sup> °C Db
Cable gland clamping area, max.	18 mm	Cable gland clamping area, min.	10 mm
Wire connection cross section, finely stranded, max.	2,5 mm <sup>2</sup>	Type of mounting	Wall mounting
Surface finish	Powder-coated	Impact resistance	7 joules in acc. with IEC60079-0
Temperature class	T4, T5, T6	Material	Aluminium AISi12

### Housing

Drill holes side B	1 x M25	Material	Aluminium AISi12
--------------------	---------	----------	------------------

### Classifications

ETIM 6.0	EC002503	ETIM 7.0	EC002503
ETIM 8.0	EC002503	ETIM 9.0	EC002503
ECLASS 9.0	27-18-05-02	ECLASS 9.1	27-18-05-90
ECLASS 10.0	27-18-05-02	ECLASS 11.0	27-18-05-02
ECLASS 12.0	27-18-05-02	ECLASS 13.0	27-18-05-02

## KLIPPON CS K51-2

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technische Daten

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	9e4cab4e-239c-4e14-b9df-a0fee300d28a

### Approvals

Approvals

**ATEX**

### Downloads


Approval/Certificate/Document of Conformity	<a href="#">TUEV14ATEX7606X</a> <a href="#">IECEXITA14.0013X</a> <a href="#">INMETRO Certificado INMETRO - LMP 21.0019X KCS</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	<a href="#">PI KLIPPON CS EN</a>

## KLIPPON CS K51-2

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Zeichnungen

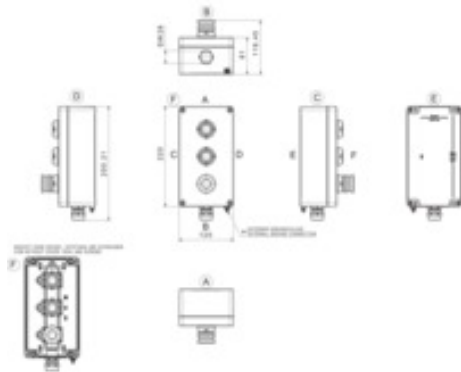

- Klippon CS POK 122208 - 4 - LdBmarLaBmpg**
- Actuating and illuminating elements
  - B: Button
  - I: Illuminated button
  - L: Lamp
  - e: NO
  - m/NC and NO
  - c: NC
  - g: Green
  - r: Red
  - e: Emergency Stop
  - p: Push
  - k: Key
  - 3: Positions of the switch
  - Drilling design
  - Dimensions
  - Enclosure Range
  - POK (Polyester)
  - K (Aluminium)
  - STB (Stainless Steel)
  - Product Name
  - Control Station
  - Brand Name
  - Klippon®