
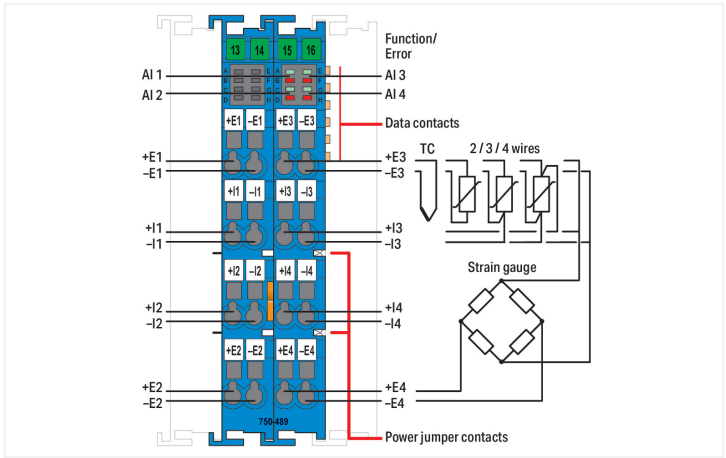
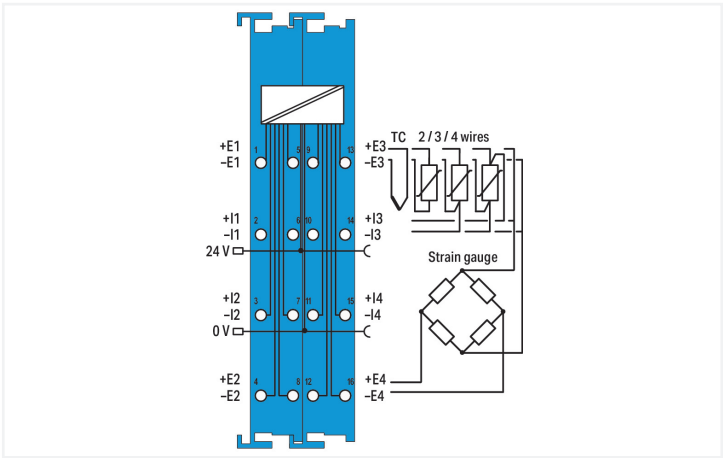
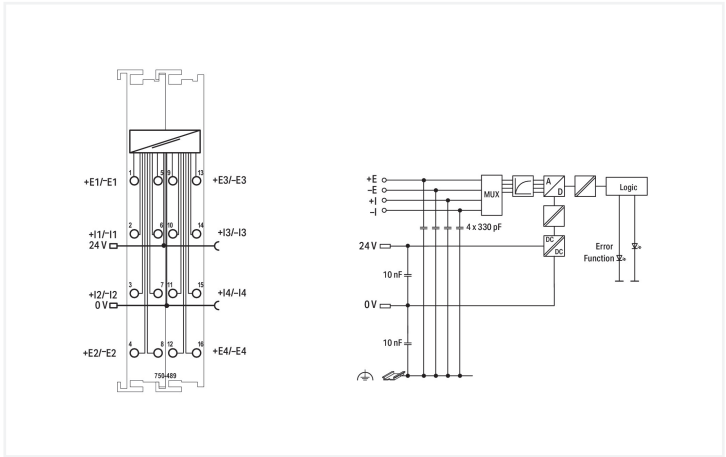


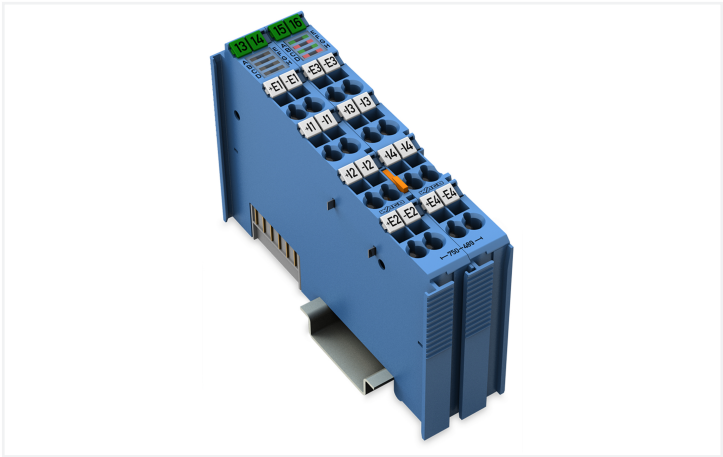

This analog input module directly connects resistance thermometers, thermocouples, millivolt sensors, resistors, resistor bridges (strain gauges), potentiometers and PTC thermistors operating in the hazardous environments of Zones 0 and 1. Cold junction compensation for the respective channel is incorporated into the module.

The WAGO I/O System 750 must be installed either in Zone 2 or in a non-hazardous area.

The 24 V supply is derived from the module's power jumper contacts.

The shield directly connects to the DIN-rail.

The parameters are set via the GSD file, **e!COCKPIT** or **WAGO-I/O-CHECK**.

Indicators:

- Green LED (availability ON/OFF)
- Red LED (underflow, overflow, measurement range overflow/underflow)

Field and system levels are electrically isolated.

A functional galvanic isolation is provided between the channels.

Notes	
Note	The analog input module must only be operated via 24 VDC Ex ii! General information (e.g., installation regulations) on explosion protection is available in the WAGO I/O System 750 manuals!



Technical data	
Item description	4-Channel Analog Input; RTD/TC
Number of analog inputs	4
Total number of channels (module)	4
Signal type	Potentiometer positions Thermocouple Resistive temperature device Resistors mV encoder
Signal type (configurable)	Yes
Sensor connection	4 x (2-wire, 3-wire, 4-wire)
Measurement range	RTDs: Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Ni1000-TK5000; Resistors: 250 Ω, 500 Ω, 1 kΩ, 2 kΩ, 4 kΩ, PTC; Potentiometer setting: 0 ... 100 %; Thermocouples: Type B; Type C; Type E; Type J; Type K; Type N; Type R, S; Type T; mV sensors: ±30 mV; ±60 mV; ±120 mV; ±250 mV; ±500 mV; ±1,000 mV; ±2,000 mV; PTC thermistor; Resistor bridges (strain gauges)
Resolution (over entire range)	0.1 K of full scale value; 0.01 K of full scale value (restricted to -50 °C ... +150 °C)
Conversion time	≥10 ms/2 wires (per channel)*; ≥20 ms/3 wires, 4 wires (per channel)*; *for RTD/R; TC/U conversion time depends on module setting
Reference for measurement error	at 0 ≤ TA ≤ 55 °C
Measurement error (reference temperature)	25 °C
Measurement error, deviation (max.) from the upper-range value	±0.2 %
Reference for measurement error (2)	during user calibration
Measurement error, reference temperature (2)	25 °C
Measurement error, deviation (max.) of the upper-range value (2)	±0.05 %
Temperature error (max.) of the upper-range value	±0.001 %/K
Cold junction compensation	integrated
Intrinsically safe Ex i	Yes
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)
Supply voltage (system)	5 VDC; via data contacts
Current consumption (5 V system supply)	50 mA
Supply voltage (field)	24 VDC; (Ex i power supply: U _o = max. 26.8 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	50 mA
Power consumption P _{max.}	1.6 W (RTD/TC operation)
Power loss P _i	1.6 W (RTD/TC operation)
Isolation	300 VAC system/supply; 1200 VDC system/supply/channel
Number of incoming power jumper contacts	2
Number of outgoing power jumper contacts	2
Indicators	LED (A, C, E, G) green: Function AI 1 ... AI 4; LED (B, D, F, H) red: Error AI 1 ... AI 4

Explosion protection	
Identification	ATEX: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc; II (1) D [Ex ia Da] IIIC; I (M1) [Ex ia Ma] I IECEx/INMETRO: Ex ec [ia Ga] IIC T4 Gc; [Ex ia Da] IIIC; [Ex ia Ma] I cULus (Devision classified): Class I, Div. 2, Group A B C D, T4
Ex standard	EN IEC 60079-0, -7, -11
Safety-relevant data (circuit)	U _o = 4 V; I _o = 13.46 mA; P _o = 13.46 mW; linear characteristic curve
Reactances Ex ia IIC	L _o = 0.19 H; C _o = 100 μF
Reactances Ex ia IIB	L _o = 0.78 H; C _o = 1000 μF
Reactances Ex ia IIA	L _o = 1.57 H; C _o = 1000 μF
Reactances Ex ia I	L _o = 2.57 H; C _o = 1000 μF
Reactances (note)	Reactances, if the internal inductance L _i or capacitance C _i (without cable) of the connected device is ≤1 % of the specified values.



Connection data	
Connection technology: inputs/outputs	16 x CAGE CLAMP®
Connectable conductor materials	Copper
Connection type	Inputs/outputs
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data	
Width	24 mm / 0.945 inches
Height	100 mm / 3.937 inches
Depth	67.8 mm / 2.669 inches
Depth from upper-edge of DIN-rail	60.6 mm / 2.386 inches

Mechanical data	
Mounting type	DIN-35 rail

Material data	
Housing material	Polycarbonate; polyamide 6.6
Fire load	2.036 MJ
Weight	99.3 g
Conformity marking	CE

Environmental requirements	
Ambient temperature (operation)	0 ... +55 °C
Ambient temperature (storage)	-25 ... +85 °C
Protection type	IP20
Pollution degree	2 per IEC 61131-2
Operating altitude	0 ... 2000 m / 0 ... 6562 ft
Mounting position	Horizontal left, horizontal right, horizontal top, horizontal bottom, vertical top and vertical bottom
Relative humidity (without condensation)	95 %
Vibration resistance	4g per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2, marine applications
EMC emission of interference	per EN 61000-6-3, marine applications
Exposure to pollutants	per IEC 60068-2-42 and IEC 60068-2-43

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143948029
Customs tariff number	85389099990



Product classification	
UNSPSC	32151705
ETIM 9.0	EC001596
ETIM 8.0	EC001596
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	2e967755-29fa-4c20-883b-b9085830cedb
SCIP notification number (Belgium)	2b743fd2-d462-4b6d-b4a1-7992ed6bca5f
SCIP notification number (Bulgaria)	cd3136c4-5842-493a-a6c7-aaccbae35441
SCIP notification number (Czech Republic)	06e947da-9a5e-4f16-86d6-d6c3a2a72497
SCIP notification number (Denmark)	7f96b952-ca60-43e7-b2df-fb463a8cb615
SCIP notification number (Finland)	2d55b01b-e34c-4619-a37c-47e3d79f3158
SCIP notification number (France)	a325a1e0-ba65-4396-a8ab-1b4499385f8f
SCIP notification number (Germany)	85e3688e-39a6-447b-aa87-ad08b282a833
SCIP notification number (Hungary)	5df6d0ea-10d7-4caf-85f2-5569529bf243
SCIP notification number (Italy)	2616f35b-5661-4756-8961-a4f345a9e642
SCIP notification number (Netherlands)	f4f4df14-9da6-4e9c-b012-e425bf3a5b61
SCIP notification number (Poland)	97af6679-bfe0-4362-bcc4-b2ff7c57ccfb
SCIP notification number (Romania)	5d2755b8-7838-4e0c-9775-0a99aa0c54a9
SCIP notification number (Sweden)	f00e1d03-d337-4ba2-94ea-69972672f649

Approvals / Certificates											
General approvals		Declarations of conformity and manufacturer's declarations									
  											
Approval	Standard	Certificate Name									
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083									
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-AIM750									
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	-	E175199									
		<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Ex-Declaration of Conformity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Ex-Declaration of Conformity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Ex-Declaration of Conformity WAGO GmbH & Co. KG	-	-	UK-Ex-Declaration of Conformity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name									
EU-Ex-Declaration of Conformity WAGO GmbH & Co. KG	-	-									
UK-Ex-Declaration of Conformity WAGO GmbH & Co. KG	-	-									



Approvals for marine applications

  		
Approval	Standard	Certificate Name
DNV DNV GL SE	DNV-CG-0339,Aug.2021	TAA0000194
KR Korean Register of Ship- ping	-	KR HMB05880-AC001
PRS Polski Rejestr Statków	-	TE/1101/880590/23

Approvals for hazardous areas

     		
Approval	Standard	Certificate Name
ATEX TUEV Nord Cert GmbH	EN 60079-0	TUEV12ATEX106032X (Ex ec[iaGa] IIC T4 Gc, [Ex ia-Da] IIIC, [Ex iaMa] I)
CCC CNEX	CNCA-C23-01	2020312310000211 (Ex ec[iaGa] IIC T4 Gc, [Ex ia-Da] IIIC, [Ex iaMa] I)
IECEx TUEV Nord Cert GmbH	IEC 60079	IECEx TUN12.0039X (Ex ec[iaGa] IIC T4 Gc, [Ex ia-Da] IIIC, [Ex iaMa] I)
INMETRO TÜV Rheinland do Brasil Ltda.	-	TÜV_14.1911_X
KTL Korea Testing Laboratory	KOSHA Article 34, IEC60079-0	21-KA4BO-0605X
UKEx Element Materials Techno- logy UK	-	EMA21UKEX0069X
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 750-489 

Documentation

Manual			
Product Manual 4AI RTD/TC/Strain Gauge Ex i	V 1.2.0 13.09.2021	pdf 6462.26 KB	

System Description		
750/753 Series I/O-System – General Product Information	pdf 953.35 KB	
Overview on WAGO-I/O-SYSTEM 750 approvals	pdf 770.48 KB	
Ex i Overview	pdf 442.07 KB	

Bid Text		
750-489	xml 8.95 KB	
750-489	docx 17.19 KB	

Instruction Leaflet			
CCC Ex (Additional information)	26.04.2023	pdf 143.96 KB	



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 750-489	EPLAN Data Portal 750-489
	ZUKEN Portal 750-489

Runtime Software			
Firmware			
0750-0489, 4-Kanal-Analogeingang; Widerstandssensoren/Thermoelemente/Widerstandsbrücken	V 05 23.05.2024	zip 188.08 KB	

1 Compatible Products
1.1 Optional Accessories
1.1.1 DIN-rail
1.1.1.1 Mounting accessories

 Item No.: 210-196 Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	 Item No.: 210-198 Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored	 Item No.: 210-508 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored	 Item No.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored
 Item No.: 210-506 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored	 Item No.: 210-114 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	 Item No.: 210-118 Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	 Item No.: 210-115 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored
 Item No.: 210-112 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored	 Item No.: 210-504 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored	 Item No.: 210-113 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	 Item No.: 210-505 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

1.1.2 Marking
1.1.2.1 Group marker carrier
 Item No.: 750-107 Group marker carrier



1.1.2.2 Marker

Item No.: 2009-145/000-006 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue 	Item No.: 2009-145/000-007 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray 	Item No.: 2009-145/000-023 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green 	Item No.: 2009-145/000-012 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange 
Item No.: 2009-145/000-005 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red 	Item No.: 2009-145/000-024 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet 	Item No.: 2009-145 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white 	Item No.: 2009-145/000-002 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow 
Item No.: 248-501/000-006 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue 	Item No.: 248-501/000-007 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray 	Item No.: 248-501/000-023 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green 	Item No.: 248-501/000-017 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green 
Item No.: 248-501/000-012 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange 	Item No.: 248-501/000-005 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red 	Item No.: 248-501/000-024 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet 	Item No.: 248-501 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white 
Item No.: 248-501/000-002 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow 			

1.1.2.3 Marker carrier

Item No.: 750-103 Group marker carrier
--

1.1.3 Shield termination

1.1.3.1 Shield clamping saddles

Item No.: 790-108 Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm 	Item No.: 790-208 Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm 	Item No.: 790-116 Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm 	Item No.: 790-216 Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm 
Item No.: 790-124 Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm 	Item No.: 790-220 Shield clamping saddle; 30 mm wide; 6 ... 20 mm 	Item No.: 790-140 Shield clamping saddle; diameter of compatible conductor 	



1.1.4 Supply module

1.1.4.1 Supply module



Item No.: 750-606
Power Supply; 24 VDC; Diagnostics; Intrinsically safe



Item No.: 750-625/000-001
Power Supply; 24 VDC; Intrinsically safe