

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Preamsembled relay module with Push-in connection, consisting of: relay base, power contact relay, plug-in display/interference suppression module, and retaining bracket. Contact switching type: 2 changeover contacts. Input voltage: 24 V DC

## Product description

The pluggable electromechanical and solid-state relays in the RIFLINE complete product range and the base are recognized and approved in accordance with UL 508. The relevant approvals can be called up at the individual components in question.

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2903334       |
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 10 pc         |
| Product key                          | DK6529        |
| GTIN                                 | 4046356732277 |
| Weight per piece (including packing) | 69.38 g       |
| Weight per piece (excluding packing) | 64 g          |
| Customs tariff number                | 85364110      |
| Country of origin                    | CN            |

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## Set consists of

### RIF-1-BPT/2X21 - Relay base

2900931

<https://www.phoenixcontact.com/pc/products/2900931>



Relay base RIF-1..., for miniature power relay with 1 or 2 changeover contacts or solid-state relays of the same design, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

---

### REL-MR- 24DC/21-21 - Single relay

2961192

<https://www.phoenixcontact.com/pc/products/2961192>



Plug-in miniature power relay, with power contact, 2 changeover contacts, input voltage 24 V DC

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## RIF-LDP-12-24 DC - Plug-in module

2900939

<https://www.phoenixcontact.com/pc/products/2900939>



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with freewheeling diode and yellow LED, polarity: A1+, A2-, input voltage: 12 V DC ... 24 V DC  $\pm 30\%$

---

## RIF-RH-1 - Retaining bracket

2900953

<https://www.phoenixcontact.com/pc/products/2900953>



Relay retaining bracket, with ejector function and holder for marking material, suitable for RIF-1 relay base, for 16 mm tall miniature power relay and solid-state relay

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## Technical data

### Notes

|                    |                                                                                                             |
|--------------------|-------------------------------------------------------------------------------------------------------------|
| Notes on operation | FBS 2-6... plug-in bridge for the input side (A2) and FBS-2-8... plug-in bridge for the output side (11/21) |
|--------------------|-------------------------------------------------------------------------------------------------------------|

### Product properties

|                         |                                |
|-------------------------|--------------------------------|
| Product type            | Relay Module                   |
| Product family          | RIFLINE complete               |
| Application             | Universal                      |
| Operating mode          | 100% operating factor          |
| Mechanical service life | approx. $3 \times 10^7$ cycles |

### Insulation characteristics

|                      |                                                  |
|----------------------|--------------------------------------------------|
| Insulation           | Safe isolation between input and output          |
|                      | Basic insulation between the changeover contacts |
| Overvoltage category | III                                              |
| Pollution degree     | 2                                                |

### Data management status

|                              |            |
|------------------------------|------------|
| Date of last data management | 03.07.2025 |
|------------------------------|------------|

### Electrical properties

|                                                      |                                                                              |
|------------------------------------------------------|------------------------------------------------------------------------------|
| Service life electrical                              | see diagram                                                                  |
| Maximum power dissipation for nominal condition      | 0.43 W                                                                       |
| Test voltage (Winding/contact)                       | 4 kV <sub>rms</sub> (50 Hz, 1 min., winding/contact)                         |
| Test voltage (Changeover contact/changeover contact) | 2.5 kV <sub>rms</sub> (50 Hz, 1 min., changeover contact/changeover contact) |
| Rated insulation voltage                             | 250 V AC                                                                     |
| Rated surge voltage                                  | 6 kV (Input/output)                                                          |
|                                                      | 4 kV (between the changeover contacts)                                       |

### Input data

#### Coil side

|                                           |                                 |
|-------------------------------------------|---------------------------------|
| Nominal input voltage $U_N$               | 24 V DC                         |
| Input voltage range                       | 19.2 V DC ... 33.6 V DC (20 °C) |
| Input voltage range in reference to $U_N$ | see diagram                     |
| Drive and function                        | monostable                      |
| Drive (polarity)                          | polarized                       |
| Typical input current at $U_N$            | 18 mA                           |
| Typical response time                     | 8 ms                            |
| Typical release time                      | 10 ms                           |
| Coil voltage                              | 24 V DC                         |
| Protective circuit                        | Freewheeling diode              |

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

|                           |            |
|---------------------------|------------|
| Operating voltage display | Yellow LED |
|---------------------------|------------|

## Output data

### Switching

|                                                |                                                                                                                                     |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Contact switching type                         | 2 changeover contacts                                                                                                               |
| Type of switch contact                         | Single contact                                                                                                                      |
| Contact material                               | AgNi                                                                                                                                |
| Maximum switching voltage                      | 250 V AC/DC                                                                                                                         |
| Minimum switching voltage                      | 5 V (10 mA)                                                                                                                         |
| Limiting continuous current                    | 8 A (see diagram)                                                                                                                   |
| Maximum inrush current                         | 25 A (20 ms, N/O contacts)                                                                                                          |
| Min. switching current                         | 10 mA (5 V)                                                                                                                         |
| Interrupting rating (ohmic load) max.          | 192 W (at 24 V DC)<br>96 W (at 48 V DC)<br>60 W (at 60 V DC)<br>44 W (at 110 V DC)<br>57 W (at 220 V DC)<br>2000 VA (for 250 V AC)  |
| Utilization category CB Scheme (IEC 60947-5-1) | AC15, 1.5 A/240 V (N/O contact)<br>AC15, 2 A/250 V (N/C contact)<br>DC13, 2 A/24 V (N/C contact)<br>DC13, 0.2 A/250 V (N/O contact) |

## Connection data

|                                  |                                                                                                                                                                                                                                                 |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection method                | Push-in connection                                                                                                                                                                                                                              |
| Stripping length                 | 8 mm                                                                                                                                                                                                                                            |
| Conductor cross section rigid    | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                                                                                                                                                                                    |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup><br>0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule with plastic sleeve)<br>0.14 mm <sup>2</sup> ... 1 mm <sup>2</sup> (Ferrule with plastic sleeve, two conductors on double terminal block) |
| Conductor cross section AWG      | 26 ... 16 (solid)<br>26 ... 16 (flexible)                                                                                                                                                                                                       |

## Dimensions

### Item dimensions

|        |       |
|--------|-------|
| Width  | 16 mm |
| Height | 96 mm |
| Depth  | 75 mm |

### Drill hole

|          |        |
|----------|--------|
| Diameter | 3.2 mm |
|----------|--------|

## Material specifications

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

|                                                  |                 |
|--------------------------------------------------|-----------------|
| Color                                            | gray (RAL 7042) |
| Flammability rating according to UL 94 (Housing) | V2 (Housing)    |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                   |
|-----------------------------------------|-------------------|
| Degree of protection (Relay base)       | IP20 (Relay base) |
| Degree of protection (Relay)            | RT III (Relay)    |
| Ambient temperature (operation)         | -40 °C ... 70 °C  |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C  |

## Approvals

### Corrosive gas test

|                |                            |
|----------------|----------------------------|
| Identification | ISA-S71.04. G3 Harsh Group |
|                | EN 60068-2-60              |

## Standards and regulations

|                       |               |
|-----------------------|---------------|
| Standards/regulations | IEC 60947-5-1 |
|-----------------------|---------------|

## Mounting

|                   |                           |
|-------------------|---------------------------|
| Mounting type     | DIN rail mounting         |
| Assembly note     | in rows with zero spacing |
| Mounting position | any                       |

## Drawings

Diagram




① DC coils

② AC coils

Operating voltage range



Interrupting rating

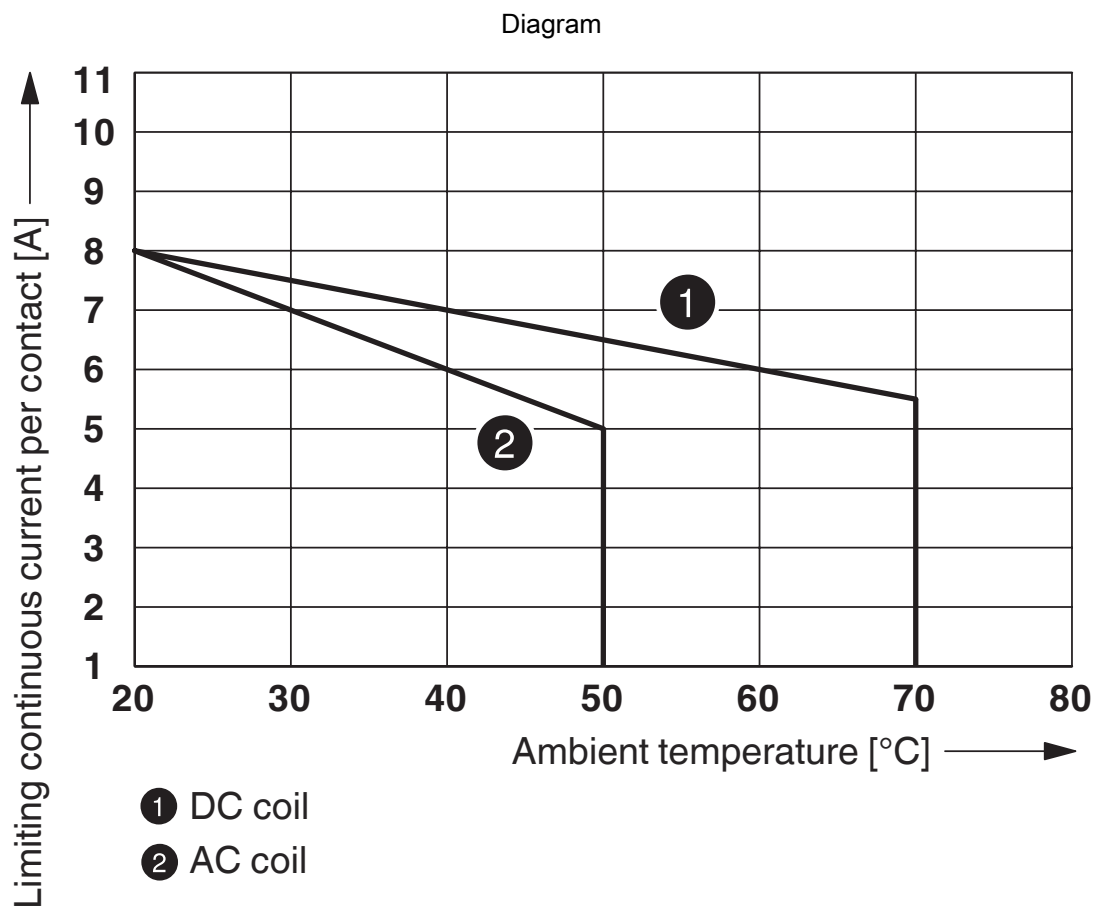

Contact derating




Electrical service life

Diagram



Service life reduction factor

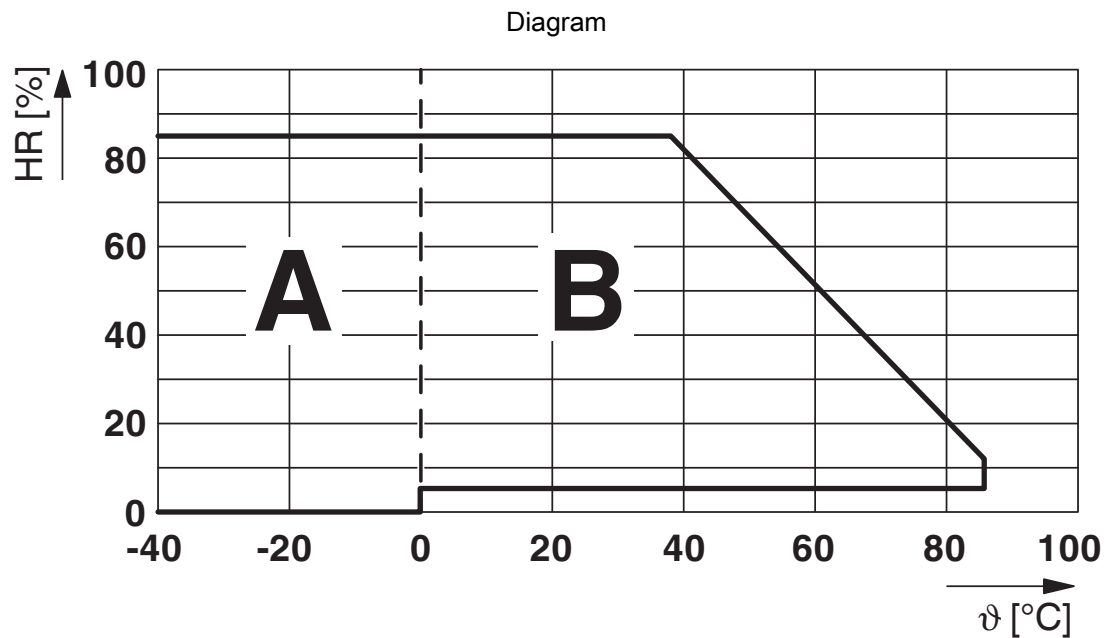

Permissible humidity for operation and storage.


The maximum permissible ambient temperature as specified in the data sheet must be observed.

Area A: Ice buildup at ambient temperatures  $\leq 0^{\circ}\text{C}$  must be prevented

Area B: Condensation at ambient temperatures  $> 0^{\circ}\text{C}$  must be prevented

On 30 full days that are naturally distributed across an entire year, a humidity level of 95% is permissible at an ambient temperature  $\leq 25^{\circ}\text{C}$ .

Circuit diagram

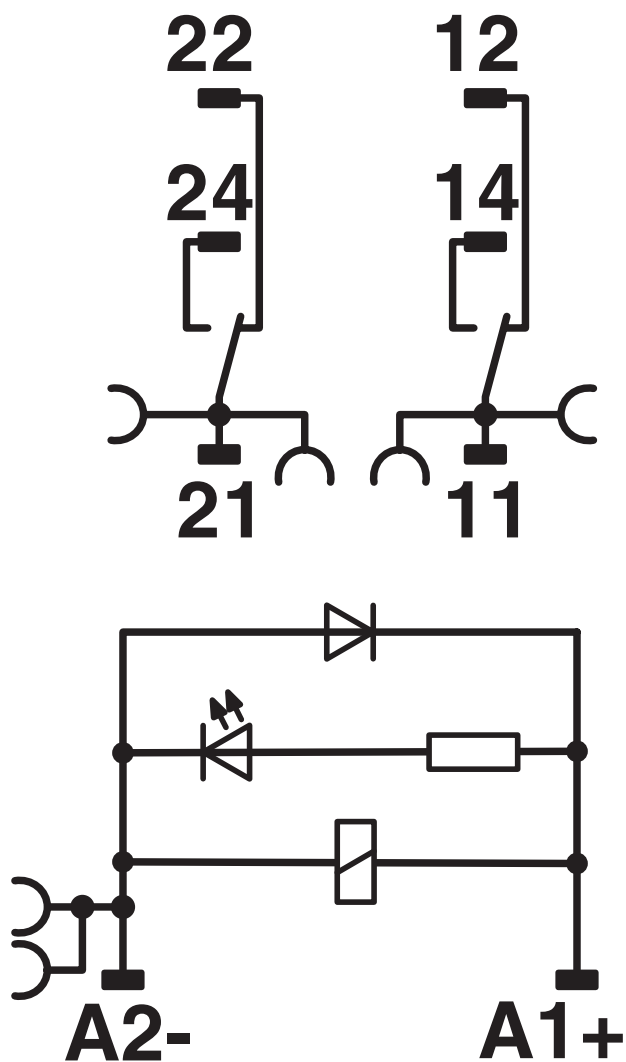

DC coils

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2903334>

### DNV

Approval ID: TAA000018V

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27371601 |
| ECLASS-15.0 | 27371601 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

## Environmental product compliance

## EU RoHS

|                                         |              |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

## China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

## EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 62a2af1b-ea0b-4196-8169-7a6461cb6feb |

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## Accessories

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/pc/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

---

### FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/pc/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## FBS 2-6 GY - Plug-in bridge

3032237

<https://www.phoenixcontact.com/pc/products/3032237>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: gray

---

## FBS 2-8 - Plug-in bridge

3030284

<https://www.phoenixcontact.com/pc/products/3030284>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## FBS 2-8 BU - Plug-in bridge

3032567

<https://www.phoenixcontact.com/pc/products/3032567>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

---

## FBS 2-8 GY

## 7042 - Plug-in bridge

3032541

<https://www.phoenixcontact.com/pc/products/3032541>



Bridge for potential distribution

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## STP 5-2 - Marker carriers

0800967

<https://www.phoenixcontact.com/pc/products/0800967>



Marker carriers, snaps into STTB 2,5, STTB 4, PTTB 2,5, and PTTB 4 double-level spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unmarked, mounting type: plug in, text field height: 10.5 mm, text field width: 5 mm

---

## RIF-1-V8/PT/FLK14/OUT - System connection

2905195

<https://www.phoenixcontact.com/pc/products/2905195>



V8 adapter for 8 x RIF-1 relay base, controller: PLC system cabling of output cards, connection 1: Push-in connection 4x, connection 2: IDC/FLK pin strip 1x 14-position, connection 3: Plug-in connection, number of channels: 8, control logic: positive switching

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

---

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module

2903334

<https://www.phoenixcontact.com/pc/products/2903334>



## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

---

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module

2903334

<https://www.phoenixcontact.com/pc/products/2903334>



## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/pc/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/pc/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/pc/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

---

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/pc/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/pc/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/pc/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/pc/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

---

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/pc/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver-colored

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/pc/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/pc/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/pc/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

---

## MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/pc/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/pc/products/0201663>

Insulating sleeve, color: white



---

## MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/pc/products/0201676>

Insulating sleeve, color: red



# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/pc/products/0201689>

Insulating sleeve, color: blue



---

## MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/pc/products/0201692>

Insulating sleeve, color: yellow



# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/pc/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/pc/products/0201728>

Insulating sleeve, color: gray



## RIF-1-RPT-LDP-24DC/2X21 - Relay module

2903334

<https://www.phoenixcontact.com/pc/products/2903334>



## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/pc/products/0201731>

Insulating sleeve, color: black



---

## ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/pc/products/1050004>



Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.1 mm

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/pc/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

## ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/pc/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/pc/products/1050020>



Zack marker strip, Strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

## ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/pc/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/pc/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

## UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/pc/products/0818108>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 10.5 mm, text field width: 4.6 mm

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/pc/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 4.6 mm, text field width: 10.5 mm

---

## UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/pc/products/0828734>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

## RIF-1-RPT-LDP-24DC/2X21 - Relay module

2903334

<https://www.phoenixcontact.com/pc/products/2903334>



## UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/pc/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

---

## GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/pc/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/pc/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

---

## STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/pc/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unmarked, mounting type: latching, text field height: 10.5 mm, text field width: 5 mm

# RIF-1-RPT-LDP-24DC/2X21 - Relay module




2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## ZB 15:UNBEDRUCKT - Zack marker strip

0811972

<https://www.phoenixcontact.com/pc/products/0811972>




Zack marker strip, Strip, white, unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 15.2 mm, Number of individual labels: 5, text field height: 10.5 mm, text field width: 15.1 mm

---

## ZB 15 CUS - Zack marker strip

0824945

<https://www.phoenixcontact.com/pc/products/0824945>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 15.2 mm, Number of individual labels: 5, text field height: 15.1 mm, text field width: 10.5 mm

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## ZB 15,LGS:L1-N,PE - Zack marker strip

0811998

<https://www.phoenixcontact.com/pc/products/0811998>



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 15.2 mm, Number of individual labels: 5, text field height: 10.5 mm, text field width: 15.1 mm

---

## UC-TM 16 - Marker for terminal blocks

0819217

<https://www.phoenixcontact.com/pc/products/0819217>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 16 mm, Number of individual labels: 32, text field height: 10.5 mm, text field width: 15.45 mm

## RIF-1-RPT-LDP-24DC/2X21 - Relay module

2903334

<https://www.phoenixcontact.com/pc/products/2903334>



## UC-TMF 16 - Marker for terminal blocks

0819262

<https://www.phoenixcontact.com/pc/products/0819262>



Marker for terminal blocks, Sheet, white, unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 16 mm, Number of individual labels: 32, text field height: 5.1 mm, text field width: 15.45 mm

---

## RIF-1-BPT/2X21 - Relay base

2900931

<https://www.phoenixcontact.com/pc/products/2900931>



Relay base RIF-1..., for miniature power relay with 1 or 2 changeover contacts or solid-state relays of the same design, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

# RIF-1-RPT-LDP-24DC/2X21 - Relay module




2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## REL-MR- 24DC/21-21 - Single relay

2961192

<https://www.phoenixcontact.com/pc/products/2961192>



Plug-in miniature power relay, with power contact, 2 changeover contacts, input voltage 24 V DC

---

## RIF-LDP-12-24 DC - Plug-in module

2900939

<https://www.phoenixcontact.com/pc/products/2900939>



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with freewheeling diode and yellow LED, polarity: A1+, A2-, input voltage: 12 V DC ... 24 V DC  $\pm 30\%$

# RIF-1-RPT-LDP-24DC/2X21 - Relay module



2903334

<https://www.phoenixcontact.com/pc/products/2903334>

## RIF-RH-1 - Retaining bracket

2900953

<https://www.phoenixcontact.com/pc/products/2900953>



Relay retaining bracket, with ejector function and holder for marking material, suitable for RIF-1 relay base, for 16 mm tall miniature power relay and solid-state relay

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)