



Data Sheet | Item Number: 857-450


Loop-powered isolation amplifier; Bipolar current and voltage input signal; Current output signal; Configuration via DIP switch; Power supply via output; 6 mm module width; 2,50 mm²

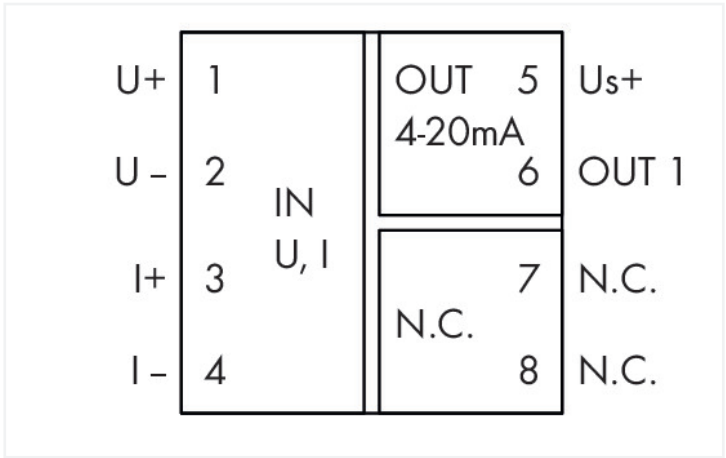

<https://www.wago.com/857-450>

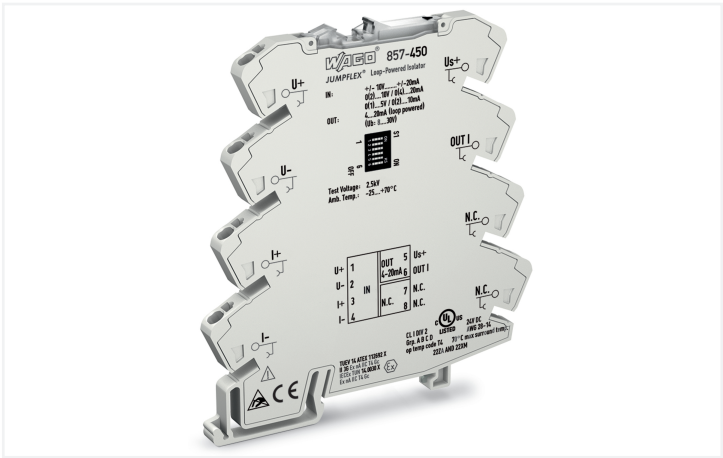

857-450					
DIP Switch Adjustability					
DIP switch (6 positions)					
1	2	3	4	5	6
Input Signal				Output Signal	Max. Operating Frequency
4 ... 20 mA				4 ... 20 mA	100 Hz
0 ... 20 mA				4 ... 20 mA	30 Hz
±20 mA				4 ... 20 mA	
2 ... 10 mA				4 ... 20 mA	
0 ... 10 mA				4 ... 20 mA	
±10 mA				4 ... 20 mA	
0 ... 5 mA				4 ... 20 mA	
±5 mA				4 ... 20 mA	
0 ... 20 V				4 ... 20 mA	
±20 V				4 ... 20 mA	
2 ... 10 V				4 ... 20 mA	
0 ... 10 V				4 ... 20 mA	
±10 V				4 ... 20 mA	
1 ... 5 V				4 ... 20 mA	
0 ... 5 V				4 ... 20 mA	
±5 V				4 ... 20 mA	
0 ... 2 V				4 ... 20 mA	
±2 V				4 ... 20 mA	
0 ... 1 V				4 ... 20 mA	
±1 V				4 ... 20 mA	

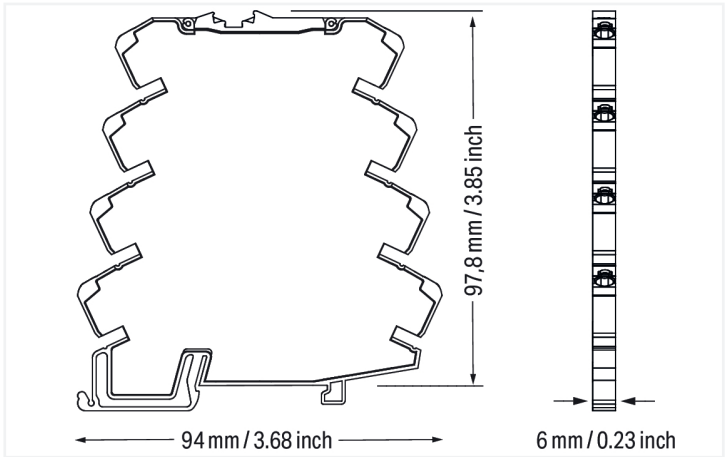

Short description:

WAGO's loop-powered isolator converts, amplifies, filters and electrically isolates standard unipolar/bipolar analog signals.

Features:

- No additional supply voltage required
- Zero/span adjustment
- Standard unipolar/bipolar analog signals at input
- Calibrated measurement range switching
- Switchable limit frequency
- 3-way electrical isolation with 2.5 kV test voltage

Technical data	
Configuration	
Configuration options	DIP switch
Input	
Input signal type	Voltage Current
Input signal (voltage)	±1 V 0 ... 1 V ±2 V 0 ... 2 V ±5 V 0 ... 5 V 1 ... 5 V ±10 V 0 ... 10 V 2 ... 10 V ±20 V 0 ... 20 V



Input	
Input signal (current)	±5 mA 0 ... 5 mA ±10 mA 0 ... 10 mA 2 ... 10 mA ±20 mA 0 ... 20 mA 4 ... 20 mA
Input resistance (current input)	≤ 50 Ω
Input resistance (voltage input)	≥ 1 MΩ
Input current (max.)	50 mA
Input voltage (max.)	30 V
Zero/span adjustment	±5 % of upper range value

Signal processing	
Limit frequency	100 Hz / 30 Hz (configurable via DIP switch)
Step response (typ.)	3.5 ms

Power supply	
Power supply type	Loop-powered (via output)
Supply voltage	8 ... 30 VDC (Power is derived from the output circuit.)

Safety and protection			
Protection type	IP20	Test voltage	
		Test voltage (input/output/supply)	2.5 kVAC; 50 Hz; 1 min

Connection data	
Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data	
Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

Mechanical data	
Mounting type	DIN-35 rail

Output (analog)	
Output signal type	Current
Output signal (current)	4 ... 20 mA
Load impedance (current output)	≤ 600 Ω

Measurement error	
Transmission error (typ.)	≤ 0.1 % of upper-range value
Temperature coefficient	≤ 0.01 %/K



Material data	
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.363 MJ
Weight	37.9 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and specifications	
Conformity marking	CE
EMC immunity to interference	EN 61000-6-2
EMC emission of interference	EN 61000-6-3

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4045454828479
Customs tariff number	85437090300

Product classification	
UNSPSC	39121008
eCl@ss 10.0	27-21-01-20
eCl@ss 9.0	27-21-01-20
ETIM 9.0	EC002653
ETIM 8.0	EC002653
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	e16f64f5-6ced-40e1-83dc-3485ebbaa281
SCIP notification number (Belgium)	fdb208e6-e00a-417a-9b1e-23385c79c3e7
SCIP notification number (Bulgaria)	71c2721c-96ec-483c-8d59-3298d2cadbe4
SCIP notification number (Czech Republic)	5c16d30b-bcb6-4c91-bbd3-2673166dad86
SCIP notification number (Denmark)	2231a6fe-a693-4d2b-a733-142cc7198e54
SCIP notification number (Finland)	371ca545-e559-439b-b2dd-4f01fa577e55
SCIP notification number (France)	fccbb7f1-dfa2-4b72-b77d-1a08dd836ab4
SCIP notification number (Germany)	29c84369-2afb-4dbd-9b11-2d5004b8865a
SCIP notification number (Hungary)	8a5d8371-ae0-49ae-8bce-d4531298978b
SCIP notification number (Italy)	1559b561-ca2e-4be9-a1ce-809f6fe13e83



Environmental Product Compliance	
SCIP notification number (Netherlands)	2d6da5de-e5f0-4b55-b880-8a97605296d3
SCIP notification number (Poland)	e605d2da-b4f1-4136-8fee-0882afb24ea4
SCIP notification number (Romania)	a6879cf5-7e37-44c6-86a2-fe89bbdf8182
SCIP notification number (Sweden)	45198689-2995-41e0-a972-5410394c26c8

Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations

EAC			Approval	Standard	Certificate Name
			EAC	TP TC 020/2011	EAC CoC 03081
			GZO Almaty Standart		

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity	-	-
WAGO GmbH & Co. KG		

Approvals for hazardous areas		
   		
Approval	Standard	Certificate Name
CCC CNEX	CNCA-C23-01	2020312310000210 (Ex ec IIC T4 Gc)
IECEX TUEV Nord Cert GmbH	-	IECEX TUN14.0030X
UKEx WAGO GmbH & Co. KG	EN 60079-0	WAGO22UKEX004X
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	ANSI/ISA 12.12.01	E198726

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 857-450

↓

Documentation				
Bid Text			Instruction Leaflet	
857-450	19.02.2019	xml 5.43 KB	CCC Ex (Additional in- formation)	pdf 140.99 KB
857-450	20.02.2019	docx 16.97 KB	Loop-Powered-Trenn- verstärker	pdf 1745.01 KB



CAD/CAE-Data	
CAD data 2D/3D Models 857-450 ↓	CAE data EPLAN Data Portal 857-450 ↓
	WSCAD Universe 857-450 ↓
	ZUKEN Portal 857-450 ↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



[Item No.: 249-117](#)
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[Item No.: 249-197](#)
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[Item No.: 249-116](#)
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.2 Interface module

1.1.2.1 Interface adapters



[Item No.: 857-980](#)
Interface adapter; 16-pole; analog

1.1.3 Jumper

1.1.3.1 Jumper



[Item No.: 281-482](#)
Jumper; 2-way; insulated; gray



[Item No.: 859-410/000-006](#)
Jumper; for jumper slot; 10-way; insulated; blue



[Item No.: 859-410](#)
Jumper; for jumper slot; 10-way; insulated; light gray



[Item No.: 859-410/000-005](#)
Jumper; for jumper slot; 10-way; insulated; red



[Item No.: 859-410/000-029](#)
Jumper; for jumper slot; 10-way; insulated; yellow



[Item No.: 859-402/000-006](#)
Jumper; for jumper slot; 2-way; insulated; blue



[Item No.: 859-402](#)
Jumper; for jumper slot; 2-way; insulated; light gray



[Item No.: 859-402/000-005](#)
Jumper; for jumper slot; 2-way; insulated; red



[Item No.: 859-402/000-029](#)
Jumper; for jumper slot; 2-way; insulated; yellow



[Item No.: 859-403/000-006](#)
Jumper; for jumper slot; 3-way; insulated; blue



[Item No.: 859-403](#)
Jumper; for jumper slot; 3-way; insulated; light gray



[Item No.: 859-403/000-005](#)
Jumper; for jumper slot; 3-way; insulated; red



[Item No.: 859-403/000-029](#)
Jumper; for jumper slot; 3-way; insulated; yellow



[Item No.: 859-404/000-006](#)
Jumper; for jumper slot; 4-way; insulated; blue



[Item No.: 859-404](#)
Jumper; for jumper slot; 4-way; insulated; light gray



[Item No.: 859-404/000-005](#)
Jumper; for jumper slot; 4-way; insulated; red



1.1.3.1 Jumper



Item No.: 859-404/000-029
Jumper; for jumper slot; 4-way; insulated; yellow



Item No.: 859-405/000-006
Jumper; for jumper slot; 5-way; insulated; blue



Item No.: 859-405
Jumper; for jumper slot; 5-way; insulated; light gray



Item No.: 859-405/000-005
Jumper; for jumper slot; 5-way; insulated; red



Item No.: 859-405/000-029
Jumper; for jumper slot; 5-way; insulated; yellow



Item No.: 859-406/000-006
Jumper; for jumper slot; 6-way; insulated; blue



Item No.: 859-406
Jumper; for jumper slot; 6-way; insulated; light gray



Item No.: 859-406/000-005
Jumper; for jumper slot; 6-way; insulated; red



Item No.: 859-406/000-029
Jumper; for jumper slot; 6-way; insulated; yellow



Item No.: 859-407/000-006
Jumper; for jumper slot; 7-way; insulated; blue



Item No.: 859-407
Jumper; for jumper slot; 7-way; insulated; light gray



Item No.: 859-407/000-005
Jumper; for jumper slot; 7-way; insulated; red



Item No.: 859-407/000-029
Jumper; for jumper slot; 7-way; insulated; yellow



Item No.: 859-408/000-006
Jumper; for jumper slot; 8-way; insulated; blue



Item No.: 859-408
Jumper; for jumper slot; 8-way; insulated; light gray



Item No.: 859-408/000-005
Jumper; for jumper slot; 8-way; insulated; red



Item No.: 859-408/000-029
Jumper; for jumper slot; 8-way; insulated; yellow



Item No.: 859-409/000-006
Jumper; for jumper slot; 9-way; insulated; blue



Item No.: 859-409
Jumper; for jumper slot; 9-way; insulated; light gray



Item No.: 859-409/000-005
Jumper; for jumper slot; 9-way; insulated; red



Item No.: 859-409/000-029
Jumper; for jumper slot; 9-way; insulated; yellow

1.1.4 Marking

1.1.4.1 Marker



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-502
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-566
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-503
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-504
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-505
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-506
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.4.2 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel;
not stretchable; plain; snap-on type; white

1.1.5 Power supply

1.1.5.1 Power Supply



Item No.: 787-2852
Switched-mode power supply; 1-phase;
24 VDC output voltage; 1 A output current

1.1.6 Terminal blocks

1.1.6.1 Supply module



Item No.: 857-979
Supply and through module

1.1.6.2 Through terminal block



Item No.: 857-979
Supply and through module

1.1.7 Tool


1.1.7.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a
partially insulated shaft; multicoloured


Installation Notes

Configuring



Configuration via DIP switch

Commoning



Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.