




- Features:**
- Power supply with TopBoost, PowerBoost and configurable overload behavior
 - Configurable digital signal input and output, optical status indication, function keys
 - Communication interface for configuration and monitoring
 - Optional connection to IO-Link, EtherNet/IP™, Modbus TCP or Modbus RTU
 - Suitable for both parallel and series operation
 - Natural convection cooling when horizontally mounted
 - Pluggable connection technology
 - Electrically isolated output voltage (SELV/PELV) per EN 61010-2-201/UL 61010-2-201
 - Marker slot for WAGO marking cards (WMB) and WAGO marking strips

Technical data			
Input		Output	
Phases	3	Nominal output voltage $U_{o\,nom}$	24 VDC (SELV)
Nominal input voltage $U_{i\,nom}$	3 x 400 ... 500 VAC (connection without neutral conductor)	Output voltage range	24 ... 28 VDC (adjustable)
Input voltage range	3 x 340 ... 550 VAC	Default Setting	24 VDC
Nominal mains frequency range	50 ... 60 Hz	Nominal output current $I_{o\,nom}$	10 A (24 VDC)
Input current I_i	$\leq 3 \times 0.6$ A (400 VAC; 24 VDC / 10 A)	Nominal output power	240 W
Inrush current	after 1 ms	Deviation	≤ 1 %
Power factor correction (PFC)	Active	Residual ripple	≤ 70 mV (peak-to-peak)
Mains failure hold-up time	≥ 20 ms (3 x 400 VAC)	Current limitation	$1.1 \times I_{o\,nom}$ (typ.)
		Overload behavior	TopBoost/PowerBoost/Time-limited constant current mode (other overload behaviors can be set)
		PowerBoost	15 ADC (5 s)
		TopBoost	Up to 600 %

Signaling and Communication	
Signaling	Optical status indication (DC OK; load; warning and error states) Digital signal input and output (DI/DO)

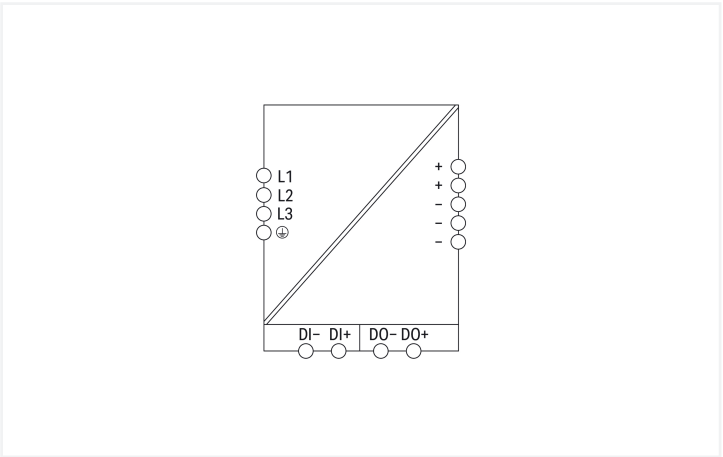

Efficiency/Power Losses	
Power loss P _I	≤ 3 W (standby); ≤ 3 W (no load); ≤ 18 W (400 VAC; nominal load)
Efficiency (typ.)	94.1 % (400 VAC; 10 A; 25 °C)

Circuit Protection	
Internal fuse	3 x T 2.5 A / 500 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	3 x 16 A (for USA/Canada: 3 x 15 A)

Safety and protection	
Isolation voltage (pri.-sec., AC)	3510 V
Isolation voltage (pri.-PE, AC)	2200 V
Isolation voltage (sec.-PE)	0.5 kVDC
Isolation voltage (sec.-signal)	0.5 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 35 VDC
Overvoltage category	III (≤ 2000 m a.s.l.); II (> 2000 m a.s.l.)
Pollution degree	2
Transient suppression (primary)	Yes
Overvoltage protection; secondary	Internal protective circuit ≤ 35 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 1,000,000 h (per IEC 61709)

Connection Data			
Connection 1		Connection 2	
Connection type	Input/signaling	Connection type	Output
Connection technology	CAGE CLAMP®	Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 721 Series	WAGO connector	WAGO 831 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG	Solid conductor	0.5 ... 10 mm² / 20 ... 8 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG	Fine-stranded conductor	0.5 ... 10 mm² / 20 ... 8 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm²
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor; with uninsulated ferrule	0.5 ... 6 mm²
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches	Strip length	13 ... 15 mm / 0.51 ... 0.59 inches

Physical data	
Width	50 mm / 1.969 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	130 mm / 5.118 inches
Note (dimensions)	Height without connector Height with connector: 166 mm



Mechanical data		
Mounting type		DIN-35 rail
Material data		
Fire load		0 MJ
Weight		1000 g
Environmental requirements		
Ambient temperature (operation)		-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)		-40 ... +85 °C
Relative humidity		5 ... 96 % (no condensation permissible)
Derating		See instruction leaflet
Climatic category		3K3 (per EN 60721)
Operating altitude (max.)		5000 m
Standards and Specifications		
Conformity marking		CE
Standards/specifications		EN 61010-1 EN 61010-2-201 EN 61204-3 UL 61010-1 UL 61010-2-201 SEMI F47 UL 121201 (HazLoc)
Commercial data		
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		CN
GTIN		4066966137835
Customs tariff number		85044083900
Product Classification		
UNSPSC		39121004
ETIM 9.0		EC002540
ETIM 10.0		EC002540
ECCN		NO US CLASSIFICATION
Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03080
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc.	UL 61010-2-201	UL-US-2209512-0

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
MFD for SEMI F47 WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	UL 121201	A-E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 2787-2346



Documentation

Manual
Product Manual Power supply; Pro 2; 3-phase; 24 VDC output voltage; 10 A output current

V 1.0.1
15.02.2022

pdf
8120.46 KB



Bid Text
2787-2346
11.05.2022
xml 9.31 KB
2787-2346
11.05.2022
docx 29.81 KB



Instruction Leaflet

Stromversorgung Pro 2

V 1.1.0
03.03.2022

pdf
4602.62 KB





CAD/CAE-Data	
CAD data 2D/3D Models 2787-2346 ↓	CAE data EPLAN Data Portal 2787-2346 ↓

1 Compatible Products
1.1 Product Expansions
1.1.1 Communication Module



Item No.: 2789-9023 Communication module; EtherNet/IP; MQTT Pub/Sub; communication capability	Item No.: 2789-9080 Communication module; IO-Link; communication capability	Item No.: 2789-9015 Communication module; Modbus RTU; RJ45; communication capability	Item No.: 2789-9052 Communication module; Modbus TCP; communication capability
---	---	--	--

1.2 Optional Accessories
1.2.1 Cables and connectors
1.2.1.1 Communication cable



Item No.: 750-923/000-001 Configuration cable; USB connector; Length: 5 m

1.2.3 Marking
1.2.3.1 Marker



Item No.: 2009-115 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.2.3.2 Marker carrier



Item No.: 2789-1233 Marker carrier; for WMB or marking strips; Length: 33 mm
--

1.2.3.3 Marking strip



Item No.: 2009-110 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white
--



1.2.4 Tool

1.2.4.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured