




Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Removable front panel and screw mounts for alternative installation in distribution boxes or devices
- Pluggable *picoMAX*® Connection Technology (tool-free)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204

Technical data			
Input		Input	
Phases	1	Mains failure hold-up time	≥ 70 ms
Nominal input voltage $U_{i\text{nom}}$	1 x 100 ... 240 VAC		
Input voltage range	1 x 85 ... 264 VAC; 125 ... 375 VDC		
Input voltage derating	-2 %/V (< 100 VAC); -1.33 %/V (< 140 VDC)		
Nominal mains frequency range	47 ... 63 Hz; 0 Hz		
Input current I_i	≤ 0.6 A		
Discharge current	≤ 0.25 mA		
Power factor	≥ 0.5		
Power factor correction (PFC)	Passive		

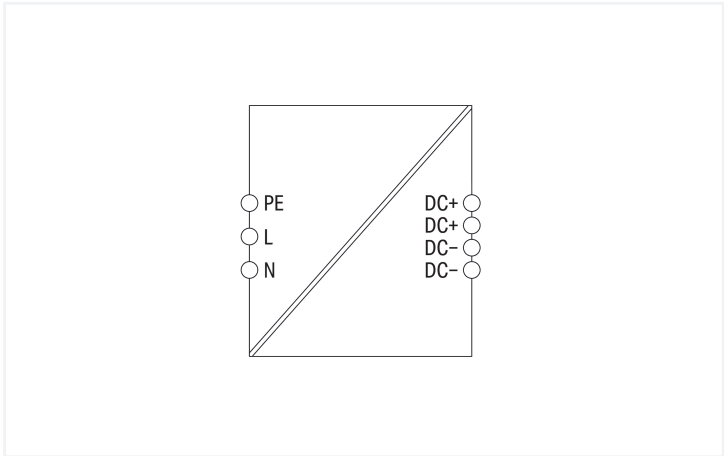

Output	
Nominal output voltage $U_{o\,nom}$	24 VDC (SELV)
Output voltage range	22 ... 26 VDC (adjustable)
Default Setting	24 VDC
Nominal output current $I_{o\,nom}$	1.3 A
Nominal output power	31.2 W
Deviation	≤ 1 %
Deviation, dynamic load change 10 ... 90 %	≤ 1 %
Residual ripple	≤ 100 mV (peak-to-peak)
Overload behavior	Constant power (in overload range: 1.05 ... 1.35 x $I_{o\,nom}$); Shutdown and automatic restart in the event of a short circuit or permanent overload

Efficiency/Power Losses	
Power loss P_l	≤ 0.43 W
Power loss (max.) $P_{l\,(max)}$	5.5 W (100 VAC / 24 VDC; 1.3 A)
Efficiency (typ.)	87 % (230 VAC); 82 % (110 VAC)

Signaling and Communication	
Signaling	1 x DC OK LED (green)
Operation status indicator	Green LED (U_o)

Circuit Protection	
Internal fuse	T 1 A / 250 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher

Safety and protection	
Isolation voltage (pri.-sec.)	4.242 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 35 VDC
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	≤ 31 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 700,000 h (per IEC 61709)

Connection Data	
Connection 1	
Connection type	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	picoMAX® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	54 mm / 2.126 inches
Height	90 mm / 3.543 inches
Depth	56 mm / 2.205 inches
Depth from upper-edge of DIN-rail	52.5 mm / 2.067 inches
Note (dimensions)	Depth: 48 mm (without cover)

Mechanical data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail Screw mount (back/side)

Material data

Flammability class per UL94	V0
Fire load	0 MJ
Weight	239.3 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	≤ 95 % (no condensation permissible)
Derating	-2.66 %/K (> 55 °C)
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143907866
Customs tariff number	85044083900

Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	4da49159-bd5d-44a9-b5c2-9ad5ff633f38
SCIP notification number (Czech Republic)	6304604f-d1fd-48e3-9bdc-aac6d5042e4e

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
  		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc.	UL 508	E255817
UR Underwriters Laboratories Inc.	UL 60950-1	E255815

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 787-1202	

Documentation			
Manual		Bid Text	
Product Manual COM-PACT Power; 1-Phase	V 1.0.0 24.11.2020	pdf 1451.21 KB	
		787-1202 04.07.2019	xml 7.13 KB 
		787-1202 12.06.2019	docx 20.66 KB 
		ausschreiben.de 787-1202	

Instruction Leaflet	
Primär getaktete Stromversorgungen COMPACT	pdf 1527.06 KB 



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-1202	EPLAN Data Portal 787-1202
	WSCAD Universe 787-1202
	ZUKEN Portal 787-1202

1 Compatible Products
1.1 Optional Accessories
1.1.1 Strain relief
1.1.1.1 Gripping plate



[Item No.: 2092-1601](#)
Gripping plate; for female and male connectors; 1 part; Pin spacing 5 mm; 3- to 4-pole; light gray

1.1.2 Tool
1.1.2.1 Operating tool



[Item No.: 210-720](#)
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



[Item No.: 210-769](#)
SCREWDRIVER; green