


Data Sheet | Item Number: 787-2744

Power supply; Eco; 3-phase; 24 VDC output voltage; 40 A output current; DC OK contact

<https://www.wago.com/787-2744>

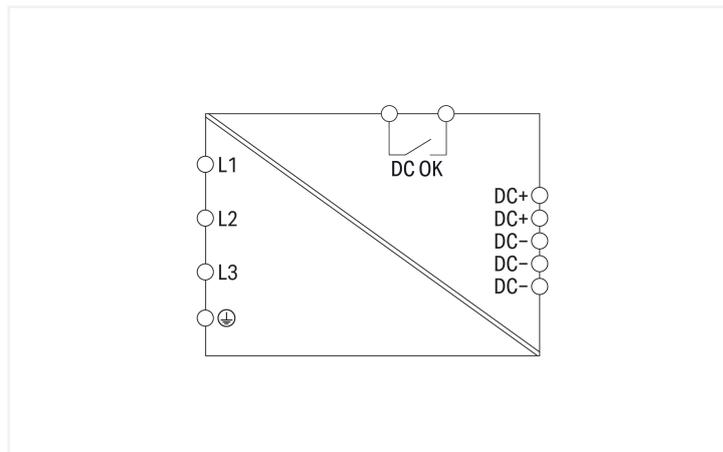

Features:

- Economical power supply for standard applications
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Fast and tool-free termination via lever-actuated terminals with push-in connection technology
- DC OK signal output
- Parallel operation
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204-1

Technical data

Input	
Phases	2 / 3
Nominal input voltage $U_{i, nom}$	(2 / 3) x 400 ... 480 VAC
Input voltage range	(2 / 3) x 325 ... 575 VAC; 560 ... 700 VDC
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	$\leq 3 \times 2.5 \text{ A}$ (400 VAC)
Discharge current	$\leq 3.5 \text{ mA}$
Inrush current	$\leq 30 \text{ A}$ (400 VAC)
Power factor	≥ 0.7 (400 VAC)
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 10 \text{ ms}$ (3 x 400 VAC)

Output	
Nominal output voltage $U_{o, nom}$	24 VDC (SELV)
Output voltage range	22 ... 28 VDC (adjustable)
Default Setting	24 VDC
Nominal output current $I_{o, nom}$	40 A (24 VDC)
Nominal output power	960 W
Deviation	$\leq 1 \%$
Residual ripple	$\leq 150 \text{ mV}$ (peak-to-peak)
Overload behavior	Constant power (in overload range: 1.05 ... 1.4 x $I_{o, nom}$); Shutdown and automatic restart in the event of a short circuit

Signaling and Communication

Signaling	1 x DC OK LED (green) 1 x Overload LED (red) 1 x Signal output DC OK (PhotoMOS as make contact, rated for max. 31.2 VDC / 100 mA)
Operation status indicator	Green LED (U_o) Red LED (overload)

Efficiency/Power Losses

Power loss P_l	$\leq 6.2 \text{ W}$ (400 VAC; nominal load); $\leq 64.3 \text{ W}$ (400 VAC; nominal load)
Efficiency (typ.)	92.3 %

Circuit Protection

Internal fuse	3 x T 6.3 A / 500 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	3 x Circuit breaker \geq 10 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	4.242 kVDC
Isolation voltage (pri.-PE)	2.2 kVDC
Isolation voltage (sec.-PE)	0.7 kVDC
Isolation voltage (sec.-signal)	0.7 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	\leq 30 VDC
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	2 devices (max.)
MTBF	> 1,300,000 h (per IEC 61709)

Connection Data

Connection 1

Connection type	Input
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 2606 Series
Solid conductor	0.5 ... 6 mm ² / 20 ... 10 AWG
Fine-stranded conductor	0.5 ... 6 mm ² / 20 ... 10 AWG
Strip length	11 ... 13 mm / 0.43 ... 0.51 inches

Connection 2

Connection type	Output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 2616 Series
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Strip length	18 ... 20 mm / 0.71 ... 0.79 inches

Connection 3

Connection type	Signaling
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 3.5 (WAGO 2091 Series)
Solid conductor	0.2 ... 1.5 mm ² / 24 ... 14 AWG
Fine-stranded conductor	0.2 ... 1.5 mm ² / 24 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	140 mm / 5.512 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	170 mm / 6.693 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0.57 MJ
Weight	2630 g

Environmental requirements

Ambient temperature (operation)	-20 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	-2 %/K (> 45 °C)
Climatic category	3K3 (per EN 60721)
Resistance to shock and vibration	Shock: 15g (per EN 60068-2-27) Vibration: 1g (per EN 60068-2-6)

Standards and Specifications

Conformity marking	CE; EAC
Standards/specifications	EN 61204-3 EN 62368-1 cURus 60950-1 cURus 62368-1 cULus 508 CSA C22.2 SEMI F47

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143588980
Customs tariff number	85044083900

Product Classification

UNSPSC	39121004
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc.	UL 508	E255817
UR Underwriters Laboratories Inc.	UL 60950-1	E255815
UR Underwriters Laboratories Inc.	UL 62368-1	E255815

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
MFD for SEMI F47 WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-2744



Documentation

Bid Text

787-2744	13.06.2019	xml 7.45 KB	
787-2744	13.06.2019	docx 23.25 KB	

Instruction Leaflet

Primär getaktete Stromversorgung ECO	V 1.5.0	pdf 980.89 KB	
---	---------	------------------	--

CAD/CAE-Data

CAD data

2D/3D Models
787-2744



CAE data

EPLAN Data Portal
787-2744



ZUKEN Portal
787-2744



1 Compatible Products

1.1 Optional Accessories

1.1.1 Tool

1.1.1.1 Operating tool



Item No.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Item No.: 210-769

SCREWDRIVER; green