
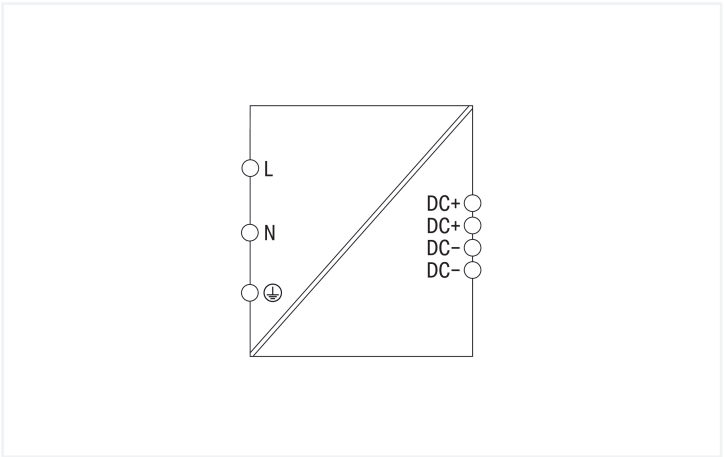


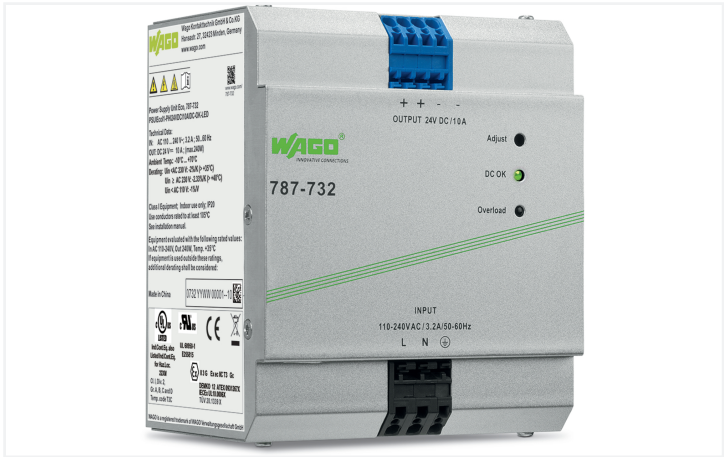

- Features:**
- Switched-mode power supply
 - Natural convection cooling when horizontally mounted
 - Encapsulated for use in control cabinets
 - Suitable for both parallel and series operation
 - Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

Technical data			
Input		Output	
Phases	1	Nominal output voltage $U_{o\ nom}$	24 VDC (SELV)
Nominal input voltage $U_{i\ nom}$	1 x 110 ... 240 VAC	Default Setting	24 VDC
Input voltage range	1 x 100 ... 264 VAC	Nominal output current $I_{o\ nom}$	10 A (24 VDC)
Nominal mains frequency range	47 ... 63 Hz; 0 Hz	Nominal output power	240 W
Input current I_i	≤ 1.2 A (230 VAC); ≤ 3.2 A (115 VAC)	Deviation	≤ 1 %
Power factor correction (PFC)	Active	Overload behavior	Constant power (in overload range: 1.15 ... 1.4 x $I_{o\ nom}$); Shutdown and automatic restart in the event of a short circuit
Signaling and Communication		Efficiency/Power Losses	
Signaling	1 x DC OK LED (green) 1 x Overload LED (red)	Power loss P_l	≤ 37.5 W (230 VAC; nominal load)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)	Power loss (max.) $P_{l\ (max.)}$	53 W (110 VAC / 24 VDC; 11 A)
		Efficiency (typ.)	86 % (230 VAC)
Circuit Protection			
Internal fuse	F 5 A / 250 VAC		
Backup fuse (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C		

Safety and protection		
Isolation voltage (pri.-sec., AC)		3000 V
Isolation voltage (pri.-PE, AC)		1500 V
Protection class		I
Protection type		IP20; per EN 60529
Overvoltage category		II
Pollution degree		2
Transient suppression (primary)	Varistor	
Short-circuit-protected		Yes
Open-circuit-proof		Yes
Parallel operation		Yes
Series operation		Yes

Connection Data		
Note (conductor cross-section)	12 AWG: THHN, THWN	
		Connection 1
		Connection type
		Input/output
		Connection technology
		CAGE CLAMP®
		WAGO connector
		WAGO 745 Series
		Solid conductor
		0.08 ... 4 mm² / 28 ... 12 AWG
		Fine-stranded conductor
		0.08 ... 4 mm² / 28 ... 12 AWG
		Strip length
		8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Width		110 mm / 4.331 inches
Height		136 mm / 5.354 inches
Depth from upper-edge of DIN-rail		92 mm / 3.622 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Fire load		10.1 MJ
Weight		1200 g

Environmental requirements		
Ambient temperature (operation)		-10 ... +70 °C
Ambient temperature (storage)		-25 ... +85 °C
Relative humidity		10 ... 95 % (no condensation permissible)
Derating		-2.33 %/K (> 40 °C; 230 VAC)
Climatic category		3K3 (per EN 60721)



Standards and Specifications	
Conformity marking	CE; UKCA
Standards/specifications	EN 61010-1 EN 61204-3 UL 61010-1 UL 61010-2-201 UL 121201 SEMI F47 EN IEC 61010-2-201

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454908140
Customs tariff number	85044083900

Product Classification	
UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption
SCIP notification number (Bulgaria)	b5b34780-c0ef-484a-854d-ba54299bc271
SCIP notification number (Czech Republic)	7739d817-9f87-4c79-add7-5f7cb472e792

Approvals / Certificates														
General approvals		Declarations of conformity and manufacturer's declarations												
   														
Approval	Standard	Certificate Name												
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078												
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081												
UL Underwriters Laboratories Inc.	-	E484199												
UL Underwriters Laboratories Inc.	-	E255817												
		<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>MFD for SEMI F47 WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	MFD for SEMI F47 WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name												
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-												
MFD for SEMI F47 WAGO GmbH & Co. KG	-	-												
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-												



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 787-732	

Documentation			
Bid Text		Instruction Leaflet	
787-732	12.07.2019	xml 6.86 KB	
787-732	17.07.2019	docx 20.91 KB	
		CCC Ex (Additional information)	26.04.2023 pdf 127.27 KB
		Primary Switch Mode Power Supply ECO-Power	V 2.2.10 22.07.2024 pdf 179.72 KB

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-732 	EPLAN Data Portal 787-732
	WSCAD Universe 787-732
	ZUKEN Portal 787-732

1 Compatible Products
1.1 Optional Accessories
1.1.1 Tool
1.1.1.1 Operating tool



Item No.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	Item No.: 210-769 SCREWDRIVER; green
---	---