


Data Sheet | Item Number: 787-886

Redundancy Module; 2 x 48 VDC input voltage; 2 x 20 A input current; 48 VDC output voltage; 40 A output current; communication capability; 10,00 mm²

<https://www.wago.com/787-886>

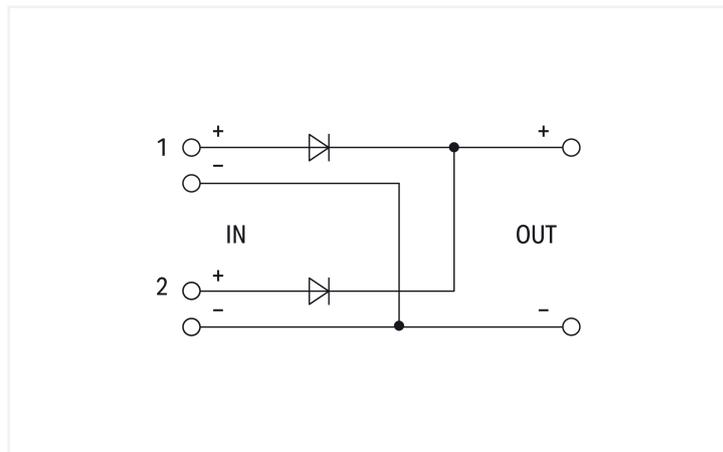

Features:

- Redundancy module with two inputs decouples two power supplies
- For redundant and fail-safe power supply
- With LED and potential-free contact for input voltage monitoring on site and remotely

Technical data

| Input | | Output | |
|---|--|--|--|
| Nominal input voltage $U_{i\text{nom}}$ | 2 x 48 VDC | Nominal output voltage $U_{o\text{nom}}$ | 48 VDC |
| Input voltage range | 2 x 36 ... 54 VDC | Output voltage range | 36 ... 54 VDC (U_e - voltage drop) |
| Nominal mains frequency range | 0 Hz | Voltage drop | ≤ 1 V (Input/output) |
| Input current I_i | ≤ 20 A (per path); ≤ 40 A (in total) | Nominal output current $I_{o\text{nom}}$ | 20 A (redundancy operation); 40 A (parallel operation) |
| | | Nominal output power | 1920 W |
| | | Output power (max.) | ≤ 2160 W |

Signaling and Communication

| | |
|----------------------------|--|
| Signaling | 1 x LED OUT (green) 1 x IN1 LED (yellow) 1 x IN2 LED (yellow) 1 x Isolated relay contact (max. 30 VDC; 1 A) |
| Operation status indicator | Green LED (U_o) 2 x yellow LED (I_i) |

Efficiency/Power Losses

| | |
|-------------------|--|
| Power loss P_l | ≤ 1.7 W (48 VDC; no load); ≤ 20 W (48 VDC; 20 A); ≤ 40 W (48 VDC; 40 A) |
| Efficiency (typ.) | 96 % |

Circuit Protection

| | |
|---------------|----|
| Internal fuse | No |
|---------------|----|

Safety and protection

| | |
|--|-----------------------------|
| Isolation voltage (connectors – housing) | 0.5 kVDC |
| Protection class | III |
| Protection type | IP20; per EN 60529 |
| Reverse voltage protection | Yes |
| Resistance to reverse feed | ≤ 60 VDC |
| Pollution degree | 2 |
| Parallel operation | Yes |
| Series operation | Yes |
| MTBF | > 500,000 h (per IEC 61709) |

Connection Data

Connection 1

| | |
|-------------------------|---|
| Connection type | Input/output |
| Connection technology | Push-in CAGE CLAMP® |
| WAGO connector | WAGO 831 Series |
| Solid conductor | 0.5 ... 10 mm ² / 20 ... 8 AWG |
| Fine-stranded conductor | 0.5 ... 10 mm ² / 20 ... 8 AWG |
| Strip length | 13 ... 15 mm / 0.51 ... 0.59 inches |

Connection 2

| | |
|-------------------------|--|
| Connection type | Relay |
| Connection technology | CAGE CLAMP® |
| WAGO connector | WAGO 231 Series |
| Solid conductor | 0.08 ... 2.5 mm ² / 28 ... 12 AWG |
| Fine-stranded conductor | 0.08 ... 2.5 mm ² / 28 ... 12 AWG |
| Strip length | 8 ... 9 mm / 0.31 ... 0.35 inches |

Physical data

| | |
|-----------------------------------|-----------------------|
| Width | 40 mm / 1.575 inches |
| Height | 181 mm / 7.126 inches |
| Depth from upper-edge of DIN-rail | 163 mm / 6.417 inches |
| Note (dimensions) | Height with connector |

Mechanical data

| | |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

Material data

| | |
|-----------|-------|
| Fire load | 0 MJ |
| Weight | 860 g |

Environmental requirements

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -10 ... +60 °C |
| Ambient temperature (storage) | -25 ... +85 °C |
| Relative humidity | 5 ... 96 % (no condensation permissible) |

Standards and Specifications

| | |
|------------------------------------|--|
| Conformity marking | CE |
| Standards/specifications | EN 60950 EN 61000-6-2 EN 61000-6-3 |
| Standards/specifications (pending) | UL 60950 UL 508 |

Commercial data

| | |
|-----------------------|--------------------------|
| Product Group | 6 (INTERFACE ELECTRONIC) |
| PU (SPU) | 1 pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4050821262725 |
| Customs tariff number | 85049017000 |

Product Classification

| | |
|-------------|----------------------|
| UNSPSC | 39121004 |
| eCl@ss 10.0 | 27-04-07-01 |
| eCl@ss 9.0 | 27-04-07-01 |
| ETIM 9.0 | EC002540 |
| ETIM 10.0 | EC002540 |
| ECCN | NO US CLASSIFICATION |

Environmental Product Compliance

| | |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Approvals / Certificates

General approvals **Declarations of conformity and manufacturer's declarations**



| Approval | Standard | Certificate Name |
|---------------------|----------------|------------------|
| EAC | TP TC 020/2011 | EAC CoC 03081 |
| GZO Almaty Standart | | |

| Approval | Standard | Certificate Name |
|-----------------------------------|----------|------------------|
| EU-Declaration of Confor- mity | - | - |
| WAGO GmbH & Co. KG | | |

Downloads

Environmental Product Compliance

Compliance Search

| | |
|--|---|
| Environmental Product Compliance 787-886 | ↓ |
|--|---|

Documentation

| Bid Text | | | |
|----------|------------|------------------|---|
| 787-886 | 15.07.2019 | xml 6.02 KB | ↓ |
| 787-886 | 15.07.2019 | docx 22.27 KB | ↓ |

| Instruction Leaflet | |
|---------------------|-----------------------|
| Redundanzmodul | pdf 272.24 KB ↓ |

CAD/CAE-Data

| CAD data | CAE data |
|----------------------|---------------------------|
| 2D/3D Models 787-886 | EPLAN Data Portal 787-886 |
| | WSCAD Universe 787-886 |

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marker

| | | | |
|--|---|--|--|
| <p>Item No.: 2009-145 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p> | <p>Item No.: 248-501 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white</p> | <p>Item No.: 793-5501 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white</p> | <p>Item No.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type; white</p> |
| <p>Item No.: 2009-115 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p> | | | |

1.1.1.2 Marking strip

| | | |
|--|---|---|
| <p>Item No.: 2009-110 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white</p> | <p>Item No.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white</p> | <p>Item No.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white</p> |
|--|---|---|

1.1.2 Mounting adapter

1.1.2.1 DIN-rail adapter

| | |
|---|---|
| <p>Item No.: 787-897 Carrier rail adapter made of zinc die-cast; for mounting 787-8xx devices to a DIN 35 rail; gray</p> | <p>Item No.: 787-896 Carrier rail adapter; for mounting 787-8xx devices to a DIN 35 rail; gray</p> |
|---|---|

1.1.2.2 Wall-mount adapter

| |
|---|
| <p>Item No.: 787-895 Mounting carrier; for screw fixing of 787-8xx devices on mounting plate or wall without DIN 35 rail; gray</p> |
|---|

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured