



## Data Sheet | Item Number: 788-701

Solid-state relay module; Nominal input voltage: 24 VDC; Output voltage range: 3 ... 30 VDC; Limiting continuous current: 5 A; 2-wire connection; Red status indicator; Module width: 15 mm; gray



<https://www.wago.com/788-701>

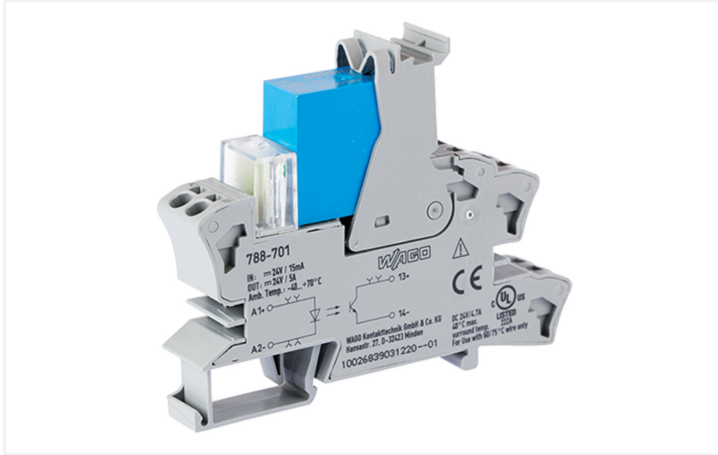

Color: ■ gray

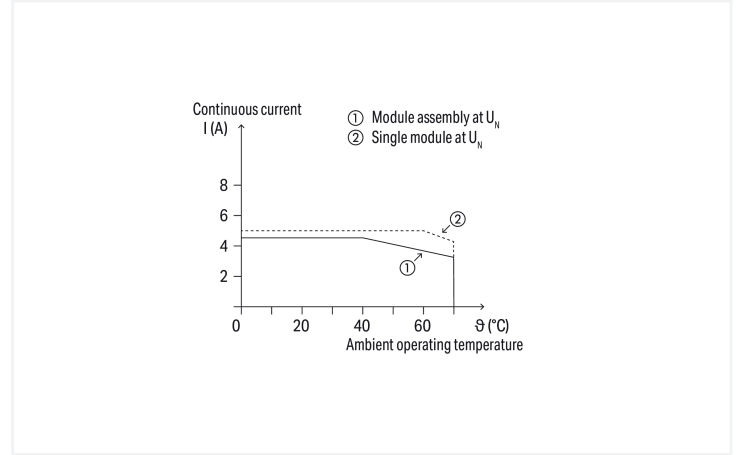

Current-carrying capacity curve

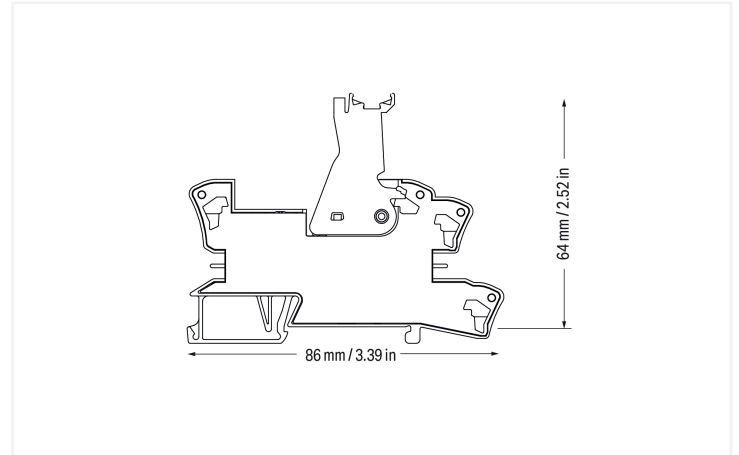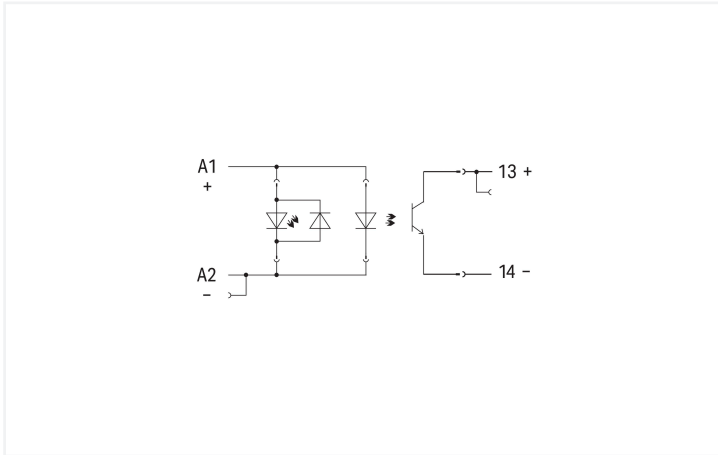

### Notes

Note

Optocouplers and solid state relays are designed for use in signal processing networks that are not supplied directly by the low-voltage power supply network.

### Technical data

#### Control circuit

Nominal input voltage $U_N$	24 VDC
Input voltage range (low level)	0 ... 2.5 VDC
Input voltage range (high level)	15 ... 30 VDC
Nominal input current at $U_N$	10 mA

#### Load circuit

Circuit type	2-wire connection
Limiting continuous current	5 A
Nominal output voltage	24 VDC
Output voltage range	0 ... 30 VDC
Voltage drop	$\leq 0.3$ VDC
Turn-on time	$\leq 50$ $\mu$ s
Turn-off time	$\leq 600$ $\mu$ s
Switching frequency	$\leq 100$ Hz

### Signaling

Status indicator	Red LED
------------------	---------

### Safety and protection

Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	2.5 kVrms
Protection type	IP20

### Connection Data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

### Physical data

Width	15 mm / 0.591 inches
Height	86 mm / 3.386 inches
Depth from upper-edge of DIN-rail	64 mm / 2.52 inches

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Fire load	0.624 MJ
Weight	47 g

### Environmental requirements

Ambient temperature (operation at $U_N$ )	-40 ... +70 °C
Ambient temperature UL (operation at $U_N$ )	-40 ... +40 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 20 \text{ K})$

### Standards and Specifications

Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 61373 EN 61010-2-201 UL 508 (max. 40 °C / 4.7 A)
--------------------------	---


Basic relay	
WAGO Basic Relay	788-751

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	15 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454743871
Customs tariff number	85365005000

Product Classification	
UNSPSC	39122331
eCl@ss 10.0	27-26-15-03
eCl@ss 9.0	27-26-15-03
ETIM 9.0	EC001504
ETIM 10.0	EC001504
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

### Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Vol.1 Sec.6	UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

### Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 788-701	<a href="#">↓</a>

## Documentation

Bid Text				Instruction Leaflet			
788-701	19.02.2019	xml 4.09 KB		Sockets with Elementary Relay/ SSR	V 1.0.1 09.10.2020	pdf 2271.22 KB	
788-701	20.02.2019	docx 15.53 KB					

## CAD/CAE-Data

CAD data	CAE data
2D/3D Models 788-701	EPLAN Data Portal 788-701
	WSCAD Universe 788-701
	ZUKEN Portal 788-701

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Ferrule

##### 1.1.1.1 Ferrule

<p><b>Item No.: 216-241</b>                      Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white</p>	<p><b>Item No.: 216-242</b>                      Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray</p>	<p><b>Item No.: 216-243</b>                      Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red</p>	<p><b>Item No.: 216-244</b>                      Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black</p>

<p><b>Item No.: 216-542</b>                      Twin ferrule; Sleeve for 2 x 1 mm<sup>2</sup> / AWG 2 x 18; red, insulated; 12 mm long; red</p>

### 1.1.2 Indicators

#### 1.1.2.1 Status indication

<p><b>Item No.: 788-120</b>                      Accessories for relay modules; Operation status indicator: red; Nominal operating voltage: 24 VDC</p>

### 1.1.3 Jumper

#### 1.1.3.1 Jumper



**Item No.: 788-118**  
Jumper; for jumper slot; 2-way; from 1 to 3; insulated; light gray



**Item No.: 788-113**  
Jumper; for jumper slot; 2-way; insulated; light gray



**Item No.: 859-402**  
Jumper; for jumper slot; 2-way; insulated; light gray



**Item No.: 788-114**  
Jumper; for jumper slot; 3-way; insulated; light gray



**Item No.: 788-115**  
Jumper; for jumper slot; 4-way; insulated; light gray



**Item No.: 788-116**  
Jumper; for jumper slot; 6-way; insulated; light gray



**Item No.: 788-117**  
Jumper; for jumper slot; 8-way; insulated; light gray

### 1.1.4 Marking

#### 1.1.4.1 Double marker carrier



**Item No.: 209-128**  
Adaptor; gray

#### 1.1.4.2 Group marker carrier



**Item No.: 249-105**  
Group marker carrier; gray



**Item No.: 209-145**  
Group marker carrier; white

#### 1.1.4.3 Marker



**Item No.: 209-183**  
Marker; white



**Item No.: 793-502**  
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



**Item No.: 793-503**  
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



**Item No.: 793-504**  
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



**Item No.: 793-505**  
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



**Item No.: 793-501**  
WMB marking card; as card; not stretchable; plain; snap-on type; white



**Item No.: 2009-115**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

#### 1.1.4.4 Marking device



**Item No.: 210-110**  
Fiber-tip pen

### 1.1.4.5 Marking strip



**Item No.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

### 1.1.4.6 Protective marker cover



**Item No.: 209-184**

Protection cover; transparent

## 1.1.5 Tool

### 1.1.5.1 Operating tool




**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


## Installation Notes

### Conductor termination



Conductor termination

### Commoning



Easy commoning using adjacent jumpers

## Marking



Marking using WMB Multi markers and group marker carriers.