



Data Sheet | Item Number: 859-801

DC/DC Converter; 24 VDC input voltage; 5 VDC output voltage; 0.4 A output current; 2,50 mm²; gray

<https://www.wago.com/859-801>

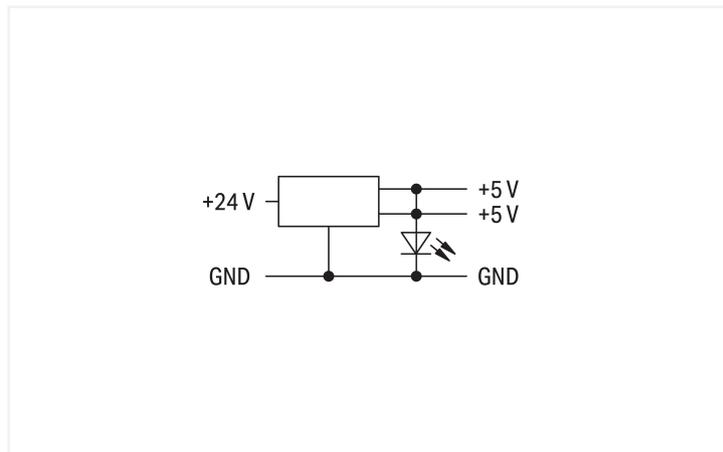

Color: ■ gray

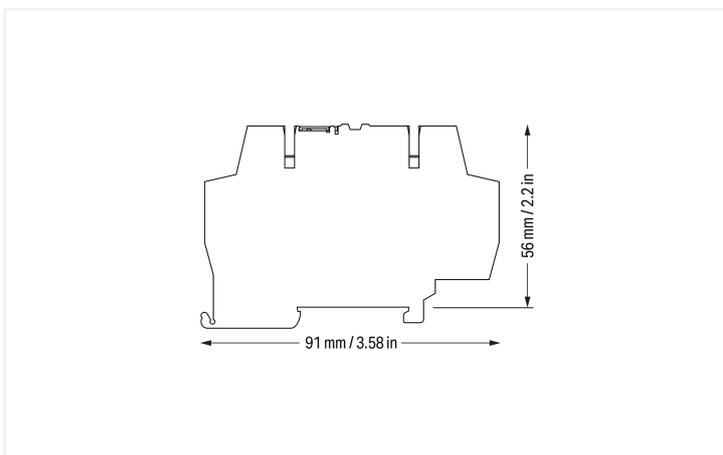

End and intermediate plate (859-525) is included

Technical data

Input		Output	
Nominal input voltage $U_{i, \text{nom}}$	24 VDC	Nominal output voltage $U_{o, \text{nom}}$	5 VDC
Input voltage range	10 ... 30 VDC	Output voltage range	±2 %
Nominal mains frequency range	0 Hz	Nominal output current $I_{o, \text{nom}}$	0.5 A (single, 10 mm spacing); 0.4 A (in a row)
Mains failure hold-up time	≥ 1 ms	Operating voltage feedthrough	≤ 2 %
		Load regulation	≤ 0.5 %
		Residual ripple	≤ 150 mV
		Switching frequency	20 kHz (Nominal)
		Overload behavior	Temporary no damage (short circuit of the output for 1 minute)

Signaling and Communication

Signaling	1 x LED
-----------	---------

Efficiency/Power Losses

Efficiency (typ.)	70 %
-------------------	------

Circuit Protection

Internal fuse	TVS diode
---------------	-----------

Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Pollution degree	2
Series operation	No

Connection Data

Number of jumper slots	2
------------------------	---

Connection 1

Connection technology	CAGE CLAMP®
WAGO connector	WAGO 859 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	6 mm / 0.236 inches
Height	91 mm / 3.583 inches
Depth from upper-edge of DIN-rail	56 mm / 2.205 inches

Mechanical data

Housing design	Rail-mount terminal block
Mounting type	DIN-35 rail

Material data

Color	gray
Fire load	0.455 MJ
Weight	20 g

Environmental requirements

Ambient temperature (operation)	0 ... +40 °C
---------------------------------	--------------

Standards and Specifications

Conformity marking	CE
--------------------	----

Commercial data

PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	US
GTIN	4050821021568
Customs tariff number	85044083900

Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	EAR99

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.4

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas



Approval	Standard	Certificate Name
CCC CNEX	CNCA-C23-01	2021312304000982 (Ex ec IIC T4 Gc)
UKEx WAGO GmbH & Co. KG	EN 60079-0	WAGO22UKEX007X_ec
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	ANSI/ISA 12.12.01	E198726

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 859-801			↓

Documentation

Bid Text			
859-801	19.02.2019	xml 4.23 KB	↓
859-801	06.02.2015	doc 26.00 KB	↓

Instruction Leaflet			
CCC Ex (Additional information)	26.04.2023	pdf 132.68 KB	↓
DC/DC-Wandler		pdf 79.43 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 859-801	↓

CAE data	
EPLAN Data Portal 859-801	↓
WSCAD Universe 859-801	↓
ZUKEN Portal 859-801	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 859-525
End and intermediate plate; 1 mm thick; gray

1.1.1.2 Intermediate plate



Item No.: 859-525
End and intermediate plate; 1 mm thick; gray

1.1.2 Marking

1.1.2.1 Marker



Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 248-502

Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-503

Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-506

Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white

1.1.2.2 Marking device



Item No.: 210-110

Fiber-tip pen

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured