We connect and protect

Continuous Hinge Enclosure with Clamps LP Type 4, 20x16x6, Gray, Mild Steel

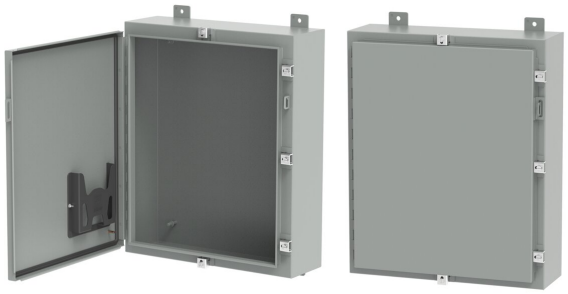

CATALOG NUMBER

A20H16ALP

These single-door enclosures feature a hinged door with clamps on three sides to create a secure seal in indoor or outdoor environments. The gray polyester powder finish inside and out provides enhanced corrosion protection in outdoor applications.

INDUSTRY STANDARDS

UL 508A Listed; Type 4, 12, 13; File No. E61997

cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997

NEMA/EEMAC Type 3, 4, 12, and 13

IEC 60529, IP66

FEATURES

- Seams continuously welded and ground smooth
- External wall-mounting brackets for easy installation
- Formed external flanges around all sides of enclosure opening
- Stainless steel screw-down clamps on three sides of door
- Removable heavy gauge stainless steel continuous hinge pin
- Removable door with continuous hinge for strength and ruggedness
- Hasp and staple provided for padlocking
- Data pocket is high-impact thermoplastic
- Collar studs for mounting optional panels
- Bonding provision on door
- Seamless foam-in-place gasket

PRODUCT ATTRIBUTES

- Article Number: 24330
- Height: 20in
- Width: 16in

Depth: 6in

Material: Mild Steel

Finish: Powder Coated

Color: Gray

Color Code: ANSI 61

Thickness: 16ga

Clamp Quantity: 4

Data Pocket: Small

Weight: 26lb

ADDITIONAL PRODUCT DETAILS

Reference the Specification Sheet for Popular Accessories.

Purchase panels separately. Optional stainless steel, conductive, composite and aluminum panels are available for most sizes.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

This document is system-generated.