

DRE570548L**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Relay from the D-SERIES DRE.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Integrated with test button (AC red, DC blue)
- Integrated with status display (AC red, DC green) and/ or free-wheel diode

General ordering data

Version	D-SERIES DRE, Relay, Number of contacts: 4, CO contact, Ag alloy, Rated control voltage: 48 V AC, Continuous current: 3 A, Plug-in connection
Order No.	7760054286
Type	DRE570548L
GTIN (EAN)	6944169719943
Qty.	20 items
Local product	Only available in certain countries

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E312083

General ordering data

Local product	Only available in certain countries
---------------	-------------------------------------

Dimensions and weights

Depth	35.4 mm	Depth (inches)	1.3937 inch
Height	27.2 mm	Height (inches)	1.0709 inch
Width	21 mm	Width (inches)	0.8268 inch
Net weight	35 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...55 °C
Humidity	35...85 % rel. humidity, no condensation		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Rated data UL

Certificate No. (cURus)	E312083
-------------------------	---------

Control side

Rated control voltage	48 V AC	Rated current DC	33.3mA/27.8mA
Power rating	1.0...1.2VA (60HZ)	Coil resistance	640 Ω ± 10%
Status indicator	red LED		

Load side

Rated switching voltage	250 V AC	Continuous current	3 A
Max. switching voltage, AC	250 V	AC switching capacity (resistive), max.	750VA
DC switching capacity (resistive), max.	72W @ 24V	Switch-on delay	<20 ms
Switch-off delay	<20 ms	Contact type	4 CO contact (Ag alloy)
Min. switching power	12 V / 10 mA		

General data

Test button available	Yes	Version of test button	not lockable
Mechanical switch position indicator	Yes	Colour	Transparent
UL 94 flammability rating	V-2		

Technical data

Insulation coordination

Rated voltage	250 V	Pollution severity	2
Surge voltage category	III	Dielectric strength for control side - load side	2 kVeff / 1 min
Dielectric strength of neighbouring contacts	1 kVeff / 1 min	Protection degree	IP20

Further details of approvals / standards

Certificate No. (cURus)	E312083
-------------------------	---------

Connection data


Wire connection method	Plug-in connection
------------------------	--------------------

Classifications


ETIM 8.0	EC001437	ETIM 9.0	EC001437
ETIM 10.0	EC001437	ECLASS 14.0	27-37-16-01
ECLASS 15.0	27-37-16-01		

Drawings


Wiring diagram

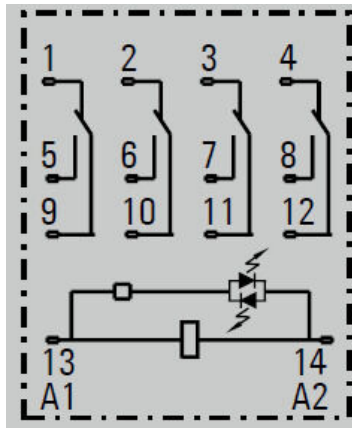


Dimensional drawing

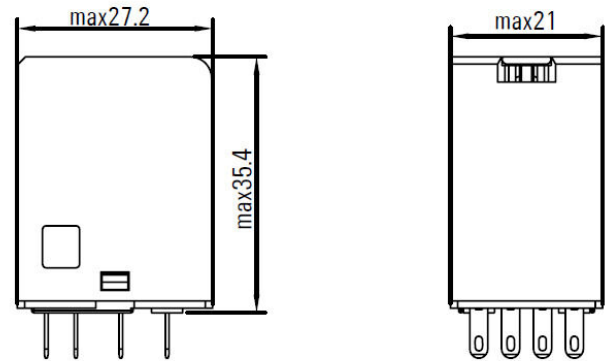


Graph

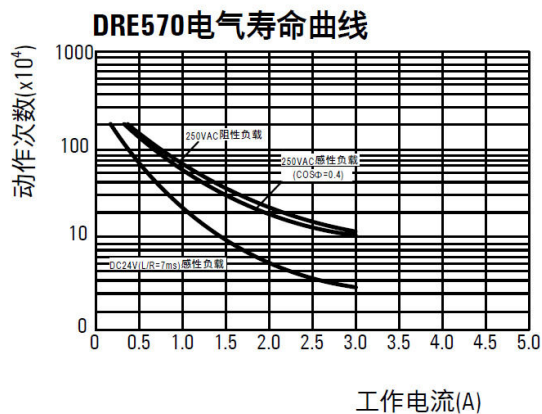

Graph

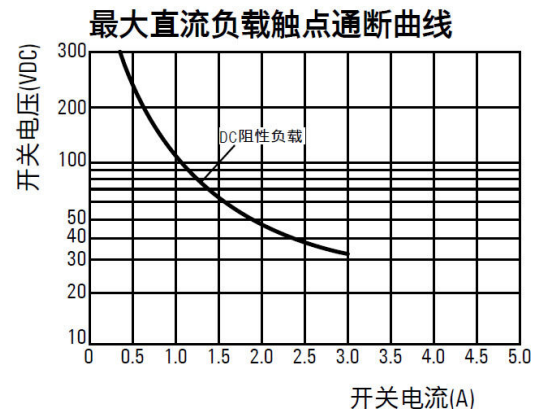

Graph

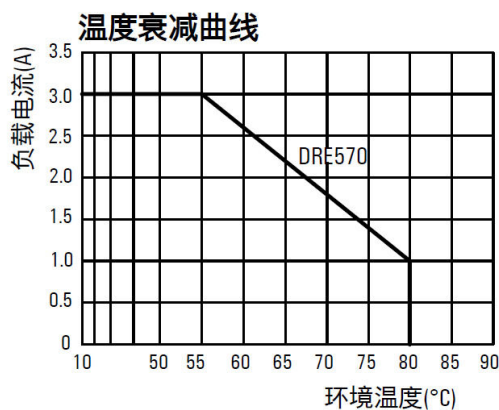

Drawings

Miscellaneous

型号说明

DRE

型号 DRE

触点类型

570 4对转换触点

线圈代码

006 6Vdc / 012 12Vdc
024 24Vdc / 048 48Vdc
110 110Vdc / 220 220Vdc
524 24Vac / 548 48Vac
615 115Vav / 730 230Vac

带指示灯

L(交流线圈使用红色,直流线圈使用绿色)

带保护二极管

D

Type codes

Accessories

Sockets



Relay sockets for the D-SERIES DRM relays


- 2 and 4 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

General ordering data

Type	FS 4CO	Version
Order No.	7760056107	D-SERIES DRM, Relay socket, Number of contacts: 4, CO contact,
GTIN (EAN)	4032248855575	Continuous current: 10 A, Screw connection
Qty.	10 ST	
Type	FS 4CO ECO	Version
Order No.	7760056127	D-SERIES, Relay socket, Number of contacts: 4, CO contact, Screw
GTIN (EAN)	4032248878161	connection
Qty.	10 ST	
Type	FS 4CO RL C	Version
Order No.	7760056386	D-SERIES, Relay socket
GTIN (EAN)	6944169789069	
Qty.	10 ST	
Type	SCM 4CO ECO	Version
Order No.	7760056264	D-SERIES DRM, Relay socket, Number of contacts: 4, CO contact,
GTIN (EAN)	6944169662973	Continuous current: 6 A, Screw connection
Qty.	10 ST	
Type	SCM 4CO P	Version
Order No.	7760056363	D-SERIES DRM, Relay socket, Number of contacts: 4, CO contact,
GTIN (EAN)	6944169772276	Continuous current: 6 A, PUSH IN
Qty.	10 ST	

Cross-connection for socket with PUSH IN connection

Cross-connection for the sockets in the D-SERIES DRM.




General ordering data

Type	SCM/SDI P CC	Version
Order No.	7760056366	D-SERIES, Cross-connector
GTIN (EAN)	6944169773327	
Qty.	10 ST	

DRE570548L**Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26
D-32758 Detmold
Germanywww.weidmueller.com**Accessories****Marker****General ordering data**

Type	FS MARK	Version
Order No.	7760056180	D-SERIES, Marking tags
GTIN (EAN)	4050118071160	
Qty.	10 ST	

Retaining clipsRetaining clip for D-SERIES DRM relays
• Metal and plastic retaining clip**General ordering data**

Type	SCM CLIP P	Version
Order No.	7760056367	D-SERIES DRM, Retaining clip
GTIN (EAN)	6944169773334	
Qty.	5 ST	

Type	DRM/DRL CLIP M	Version
Order No.	7760056108	D-SERIES, Retaining clip
GTIN (EAN)	4032248855568	
Qty.	10 ST	


Clips

Accessories

General ordering data

Type	METAL CLIP SET	Version
Order No.	7760056128	D-SERIES, Retaining clip
GTIN (EAN)	4032248878178	
Qty.	10 ST	

Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc.

Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	ESG 9/26 SCM ECO MC NE ...	Version
Order No.	1520980000	ESG, Device markers x 26 mm, PA 66, Colour: white, pluggable
GTIN (EAN)	4050118327939	
Qty.	80 ST	

Counterpart

Sockets



Relay sockets for the D-SERIES DRM relays

- 2 and 4 CO contacts
- Screw and PUSH IN connection
- Standard and low heights

General ordering data

Type	FS 4CO	Version
Order No.	7760056107	D-SERIES DRM, Relay socket, Number of contacts: 4, CO contact,
GTIN (EAN)	4032248855575	Continuous current: 10 A, Screw connection
Qty.	10 ST	
Type	FS 4CO ECO	Version
Order No.	7760056127	D-SERIES, Relay socket, Number of contacts: 4, CO contact, Screw
GTIN (EAN)	4032248878161	connection
Qty.	10 ST	
Type	FS 4CO RL C	Version
Order No.	7760056386	D-SERIES, Relay socket
GTIN (EAN)	6944169789069	
Qty.	10 ST	
Type	SCM 4CO ECO	Version
Order No.	7760056264	D-SERIES DRM, Relay socket, Number of contacts: 4, CO contact,
GTIN (EAN)	6944169662973	Continuous current: 6 A, Screw connection
Qty.	10 ST	
Type	SCM 4CO P	Version
Order No.	7760056363	D-SERIES DRM, Relay socket, Number of contacts: 4, CO contact,
GTIN (EAN)	6944169772276	Continuous current: 6 A, PUSH IN
Qty.	10 ST	