# SAC- 3,0/0,1-116/2XA-1L-Z - Double valve connector cable

1457995

https://www.phoenixcontact.com/pc/products/1457995

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Double valve connector cable, 4-position, PUR/PVC, black, free cable end, on Valve connector A, with 1 LED, Wiring: Z diode and Valve connector A, with 1 LED, Wiring: Z diode, cable length: 3 m, valve connector spacing: 0.1 m

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Efficient: control valves with two connections via a single connecting cable
- Convenient: increased machine availability thanks to quick and easy diagnostics

## Commercial data

| | |
|---|---|
| Item number | 1457995 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | AF1DGA |
| GTIN | 4046356638418 |
| Weight per piece (including packing) | 251 g |
| Weight per piece (excluding packing) | 251 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

## Technical data

### Product properties

| | |
|---|---|
| Product type | Sensor/actuator cable with valve connector |
| Application | Standard |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | no |

Insulation characteristics

| | |
|---|---|
| Overvoltage category | II |
| Degree of pollution | 3 |

### Connection data

Conductor connection

| | |
|---|---|
| Tightening torque | 0.6 Nm |

### Material specifications

| | |
|---|---|
| Flammability rating according to UL 94 | HB |
| Seal material | TPU (Seal molded) |
| Material housing valve plug | TPU |
| Contact material | CuSn |
| Valve plug contact insert material | PA 6.6 |
| Contact surface material | Sn |

### Electrical properties

| | |
|---|---|
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage $U_N$ | 24 V AC |
| | 24 V DC |
| Nominal current $I_N$ | 4 A |

Valve connector characteristics

| | |
|---|---|
| Fixing screws | M3 x 29 |
| Pulse power | 40 W (at 100 µs square-wave pulse) |
| Terminal voltage | 70 V (at 2 mA constant current) |
| Reverse voltage | 50 V |

### Mechanical properties

Mechanical data

| | |
|---|---|
| Insertion/withdrawal cycles | 50 |

### Signaling

| | |
|---|---|
| Status display | 1 LED |
| Status display present | yes |

# SAC- 3,0/0,1-116/2XA-1L-Z - Double valve connector cable

1457995

https://www.phoenixcontact.com/pc/products/1457995

## Connector

### Connection 1

| | |
|---|---|
| Type | free cable end |

### Connection 2

| | |
|---|---|
| Type | Valve connector A |
| Material | CuSn (Contact) |
| | Sn (Contact surface) |
| | PA 6.6 (Contact carrier) |
| | TPU (Housing) |
| Protective circuit | Z diode |

### Connection 3

| | |
|---|---|
| Type | Valve connector A |
| Material | CuSn (Contact) |
| | Sn (Contact surface) |
| | PA 6.6 (Contact carrier) |
| | TPU (Housing) |
| Protective circuit | Z diode |

## Cable/line

| | |
|---|---|
| Cable length | 3 m |
| | 0.1 m |

### PUR/PVC, 0.75 mm², black [116]

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 57 kg/km |
| UL AWM Style | 20549 |
| Number of positions | 4 |
| Shielded | no |
| Cable type | PUR/PVC, 0.75 mm², black [116] |
| Conductor structure signal line | 24x 0.20 mm |
| AWG signal line | 18 |
| Conductor cross-section | 4x 0.75 mm² |
| Wire diameter incl. insulation | 1.7 mm ±0.05 mm |
| External cable diameter | 6.30 mm ±0.2 mm |
| Outer sheath, material | PUR |

| | |
|---|---|
| External sheath, color | black |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PVC |
| Single wire, color | black 1, black 2, black 3, green/yellow |
| Overall twist | 4 wires, twisted |
| Max. conductor resistance | 26 Ω/km (at 20 °C) |
| Insulation resistance | ≥ 20 MΩ*km |
| Nominal voltage, cable | 300 V |
| Test voltage | 1200 V |
| Smallest bending radius, fixed installation | 63 mm |
| Flame resistance | according to DIN VDE 0482 |
| | According to DIN EN 50265-2-1 |
| | in acc. with UL FT-2 |
| Ambient temperature (operation) | -5 °C ... 80 °C (Cable, flexible installation) |
| | -40 °C ... 80 °C (cable, fixed installation) |

## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) (Valve connector) | -25 °C ... 85 °C (Valve connector) |


## Standards and regulations

### Valve connector

| | |
|---|---|
| Standard designation | Valve connector |
| Standards/specifications | EN 175301-803 |


## Drawings

Dimensional drawing

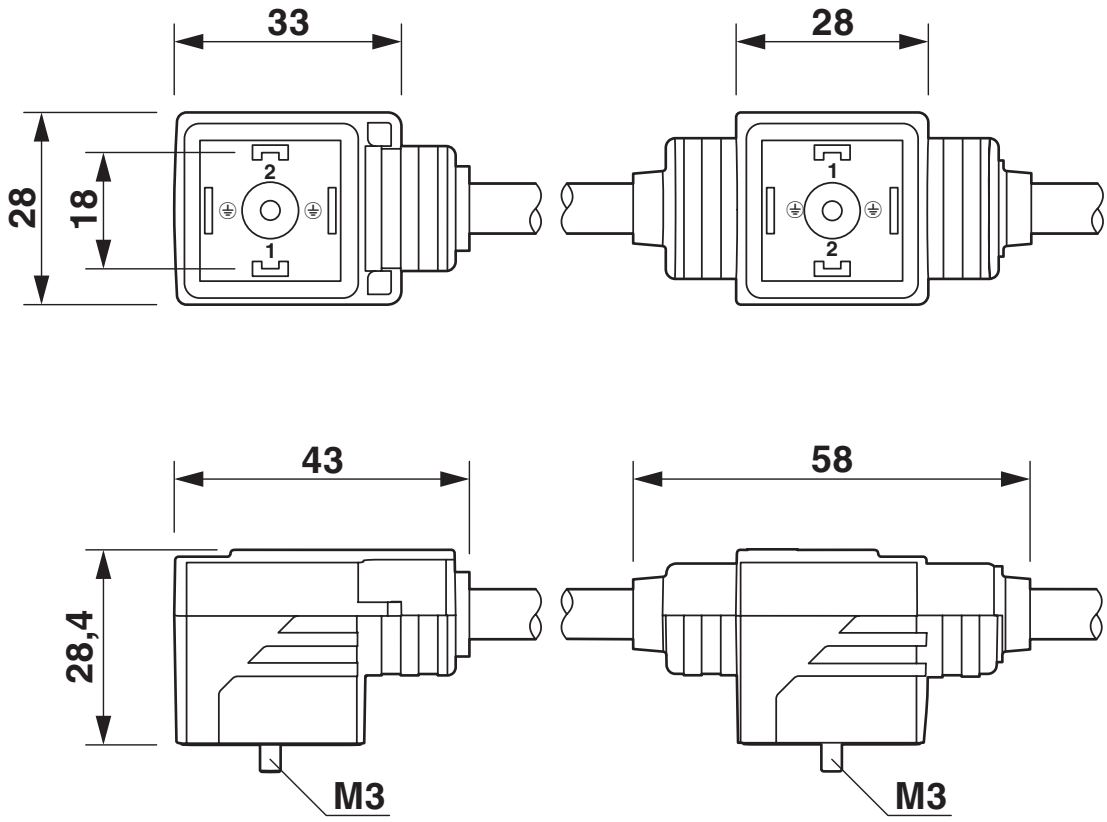



Double valve connector, 2x type A

Dimensional drawing

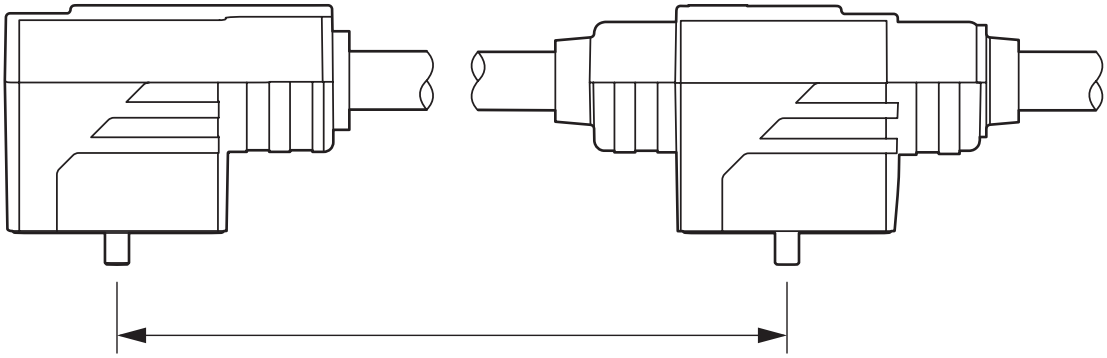


Valve connector spacing

Schematic diagram

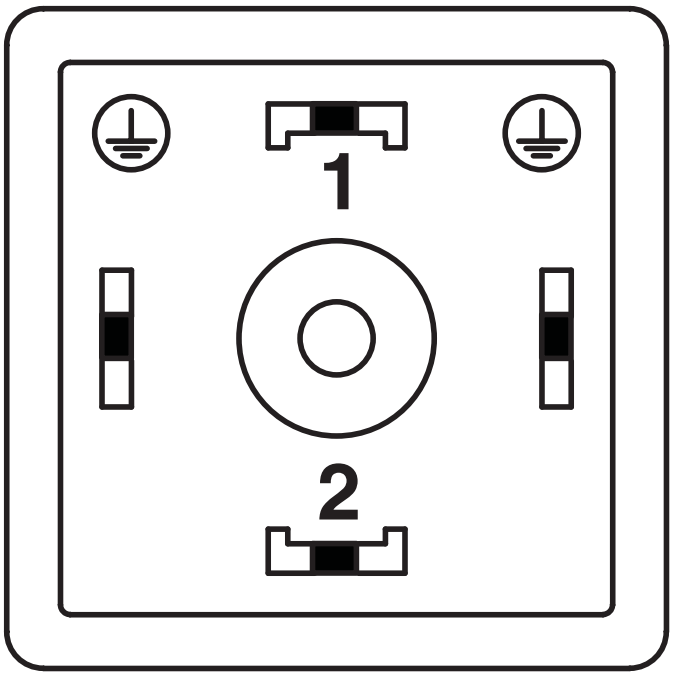


Valve connector pin assignment, type A

Circuit diagram

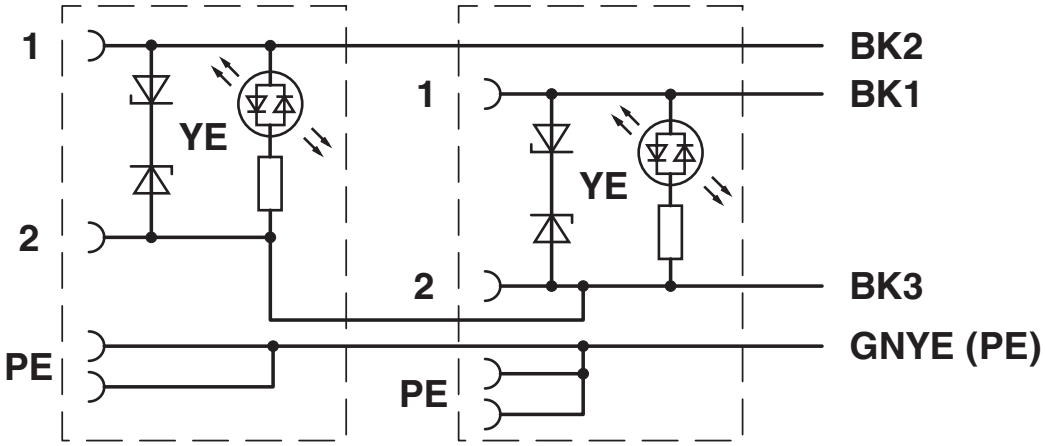


Contact assignment of the double-valve connector

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1457995

**CSA**
Approval ID: 13631

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| keine | | | | |
| | 24 V | 4 A | - | - |

**EAC-RoHS**
Approval ID: RU D-DE.HB35.B.00387

**CSAus**
Approval ID: 13631

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| keine | | | | |
| | 24 V | 4 A | - | - |

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27060312 |
| ECLASS-15.0 | 27060312 |

### ETIM

| | |
|---|---|
| ETIM 10.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 31251500 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(c)-I |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

EF3.1 Climate Change

| | |
|---|---|
| CO2e kg | 7.876 kg CO2e |


Phoenix Contact 2026 © - all rights reserved
https://www.phoenixcontact.com



PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com