

SAKDU 16


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

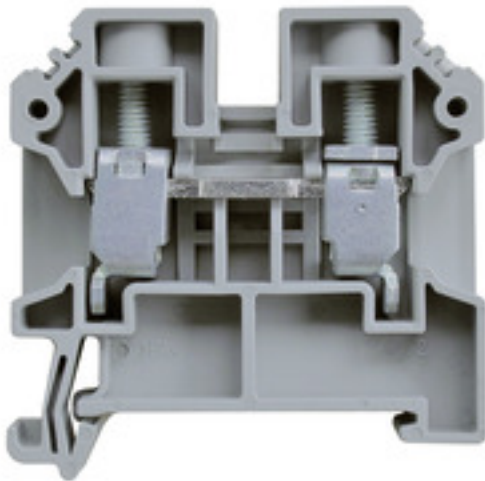

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

Version	Feed-through terminal, Screw connection, 10 mm ² , 800 V, 76 A, grey
Order No.	1256770000
Type	SAKDU 16
GTIN (EAN)	4050118120509
Qty.	50 Stück
Local product	Only available in certain countries

Erstellungs-Datum 04:39:59 CEST Ngày 30 tháng 6 năm 2023

Katalogstand 24.06.2023 / Technische Änderungen vorbehalten

SAKDU 16

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technische Daten

General ordering data

Local product Only available in certain countries

Dimensions and weights

Depth	49,75 mm	Depth (inches)	1,959 inch
Depth including DIN rail	50,5 mm	Height	51 mm
Height (inches)	2,008 inch	Width	12 mm
Width (inches)	0,472 inch	Net weight	24,96 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	PA 66/6	Colour	grey
UL 94 flammability rating	V-0		

System specifications

End cover plate required	Yes	Number of levels	1
Number of clamping points per level	2	Rail	TS 35

Additional technical data

Type of mounting Snap-on

Conductors for clamping (rated connection)

Clamping range, max.	16 mm ²	Clamping range, min.	2,5 mm ²
Clamping screw	M 4	Connection cross-section, stranded, max.	16 mm ²
Connection cross-section, stranded, min.	2,5 mm ²	Connection direction	on side
Gauge to IEC 60947-1	B6	Number of connections	2
Stripping length	15,5 mm	Tightening torque, max.	1,6 Nm
Tightening torque, min.	1,2 Nm	Type of connection	Screw connection
Wire connection cross section AWG, max.	AWG 4	Wire connection cross section AWG, min.	AWG 12
Wire connection cross section, finely stranded, max.	16 mm ²	Wire connection cross section, finely stranded, min.	4 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	16 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	4 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	16 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	4 mm ²
Wire connection cross-section, solid core, max.	16 mm ²	Wire connection cross-section, solid core, min.	2,5 mm ²

SAKDU 16

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technische Daten

General

Rail	TS 35	Wire connection cross section AWG, max.	AWG 4
Wire connection cross section AWG, min.	AWG 12		

Rating data

Rated cross-section	10 mm ²	Rated voltage	800 V
Rated current	76 A	Current at maximum wires	76 A
Volume resistance according to IEC 60947-7-x	0,56 mΩ	Rated impulse withstand voltage	8 kV
Power loss in accordance with IEC 60947-7-x	1,82 W	Pollution severity	3
Surge voltage category	III		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	4 AWG
Conductor size Factory wiring min. (UR)	12 AWG	Conductor size Field wiring max. (UR)	4 AWG
Conductor size Field wiring min. (UR)	12 AWG	Current size B (UR)	85 A
Current size C (UR)	85 A	Voltage size B (UR)	600 V
Voltage size C (UR)	600 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (UR)	E60693

Downloads

Approval/Certificate/Document of Conformity	CE Declaration of Conformity UKCA declaration of conformity
Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	