

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/2,5ADC

Current: 2.5 A

Output rating: 60 W



without DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

For any mounting position at vertical wall.

Link to Product

Illustration

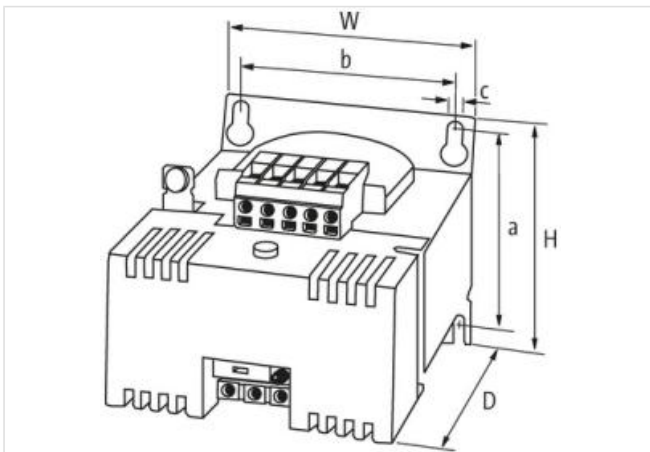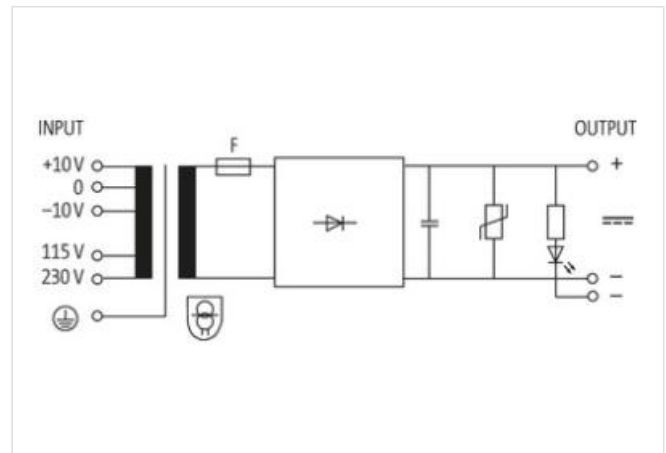

Product may differ from Image



Input

Input voltage	115/230 V AC \pm 10 V AC
Input fuse (external)	1.6 AT (115 V AC); 0.8 AT (230 V AC)
Input current	1 A (115 V AC); 0.5 A (230 V AC)
Frequency	50..60 Hz

Output

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-07-06

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 2.5 A (115 V AC); 3 A (230 V AC)
Output suppression	LED, VDR and smoothing capacitor
Output fuse	7.5 A (automotive fuse FKS)
Ripple	max. 5% eff/rms

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	65.5×64×4.8 mm
Dimensions H×W×D	83×84×124 mm