

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety doors, light grids up to SIL 3, Cat. 4, PL e, 1- or 2-channel operation, cross-circuit detection, can be retriggered, off-/on delay of 0.2 s to 300 s, 5 enabling current paths, $U_S = 24$ V DC, plug-in Push-in terminal block

Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061
- Low housing width of only 22.5mm
- 1- and 2-channel control
- 5 enabling current paths, 1 digital signal output
- Manually monitored and automatic activation in a single device

Commercial data

Item number	1015526
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNA
Product key	DNA181
Catalog page	Page 227 (C-6-2019)
GTIN	4055626496566
Weight per piece (including packing)	246 g
Weight per piece (excluding packing)	214.73 g
Customs tariff number	85371098
Country of origin	DE

Technical data

Product properties

Product type	Safety relays
Product family	PSRmini
Application	Emergency stop
	Safety door
	Light grid
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

Times

Typical response time	< 50 ms (automatic start)
	< 50 ms (manual, monitored start)
Typ. starting time with U_s	500 ms (with U_s when controlled via A1)
Typical release time	< 25 ms (when controlled via S12 and S22 (only for undelayed contacts))
	< 10 ms (when controlled via A1; applicative deactivation via A1/A2 is not permitted)
Delay time range	0.2 s ... 300 s $\pm 5\%$ (can be set for 47/48/58)
Restart time	< 1 s (Boot time)
Recovery time	500 ms (following demand of the safety function)

Electrical properties

Maximum power dissipation for nominal condition	8.1 W (At $U_s = 30\text{ V}$, $I_L^2 = 108\text{ A}^2$)
Nominal operating mode	100% operating factor

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage/insulation	Basic insulation 4 kV between all current paths and housing
	Safe isolation, reinforced insulation 6 kV between (A1, A2, S11, S12, S21, S22, S34, M1) and enabling current path (13/14) and enabling current path (23/24/34) and enabling current path (47/48/58)

Supply

Designation	A1/A2
Rated control circuit supply voltage U_s	19.2 V DC ... 30 V DC
Rated control circuit supply voltage U_s	24 V DC -20 % / +25 %
Rated control supply current I_s	typ. 80 mA
Power consumption at U_s	typ. 1.92 W
Inrush current	typ. 28 A ($\Delta t = 30\ \mu\text{s}$ at U_s)
Filter time	1 ms (For the logic. At A1 in the event of voltage dips at U_s)
Protective circuit	Serial protection against polarity reversal; Suppressor diode

Input data

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

General

Limit frequency	min. 0 Hz
	max. 1 Hz

Digital: Sensor circuit (S12, S22)

Description of the input	safety-related sensor inputs
Number of inputs	2
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Input current range "0" signal	0 mA ... 2 mA
Inrush current	< 11 mA (typically with U_S)
Filter time	max. 3 ms (Test pulse width of low test pulses)
	min. 21 ms (Test pulse rate for low test pulse)
Concurrence	∞
Limit frequency	min. 0 Hz
	max. 1 Hz
Max. permissible overall conductor resistance	150 Ω
Protective circuit	Varistor
Current consumption	< 4.5 mA (typically with U_S)

Digital: Start circuit (S34)

Description of the input	non-safety-related
Number of inputs	1
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Input current range "0" signal	0 mA ... 2 mA
Inrush current	< 8.6 mA (typically with U_S)
Filter time	max. 1 ms (Test pulse width of low test pulses)
	min. 21 ms (Test pulse rate for low test pulse)
Limit frequency	min. 0 Hz
	max. 1 Hz
Max. permissible overall conductor resistance	150 Ω
Protective circuit	Varistor
Current consumption	< 3.2 mA (typically with U_S)

Output data

Relay: Enabling current paths (13/14, 23/24/34, 47/48/58)

Output description	2 N/O contacts each in series, safety-related, floating
Number of outputs	3 (undelayed: 13/14, 23/24/34)
	2 (delayed: 47/48/58)
Contact switching type	5 enabling current paths
Contact material	AgCuNi +0.2 μm ... 0.4 μm Au / AgSnO ₂ +0.2 μm Au
Switching voltage	min. 12 V AC/DC
	max. 250 V AC/DC (Observe the load curve)

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Switching capacity	min. 60 mW
Inrush current	min. 5 mA
	max. 6 A
Switching capacity in accordance with IEC 60947-5-1	4 A (24 V (DC13))
	3 A (230 V (AC 15))
Limiting continuous current	6 A
Sq. Total current	108 A ² (observe derating)
Switching frequency	0.5 Hz (depending on the set delay time)
Mechanical service life	10x 10 ⁶ cycles
Output fuse	6 A gL/gG
	4 A gL/gG (for low-demand applications)

Signal: M1

Output description	PNP
	non-safety-related
Number of outputs	1
Voltage	approx. 23 V DC ($U_S - 1$ V)
Current	max. 100 mA
Maximum inrush current	500 mA ($\Delta t = 10$ ms at U_S)
Protective circuit	Suppressor diode
Short-circuit protection	Yes

Clock: S11, S21

Output description	PNP
	non-safety-related
Number of outputs	2
Voltage	corresponds to U_S
Current	max. 100 mA
Maximum inrush current	500 mA ($\Delta t = 10$ ms at U_S)
Protective circuit	Suppressor diode
Short-circuit protection	Yes

Connection data

Connection technology

pluggable	yes
-----------	-----

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross-section AWG	24 ... 16
Stripping length	8 mm

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Signaling

Status display	5 x bi-color LED
----------------	------------------

Dimensions

Width	22.5 mm
Height	117.5 mm
Depth	114.5 mm

Material specifications

Housing material	Polyamide
------------------	-----------

Characteristics

Safety data

Stop category	0
	1

Safety data: EN ISO 13849

Category	4
Performance level (PL)	e (4 A DC13; 3 A AC15; 8760 switching cycles/year)

Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-35 °C ... 60 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	10g (operation), 15g (transport)
Vibration (operation)	10 Hz ... 150 Hz, 2g

Approvals

CE

Identification	CE-compliant
----------------	--------------

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	EN 60664-1
-----------------------	------------

Mounting

Mounting type	DIN rail mounting
Assembly instructions	See derating curve
Mounting position	vertical or horizontal
Connection method	Push-in connection

PSR-MC73-5NO-1DO-24DC-SP - Safety relays




1015526

<https://www.phoenixcontact.com/ae/products/1015526>


Drawings

Block diagram

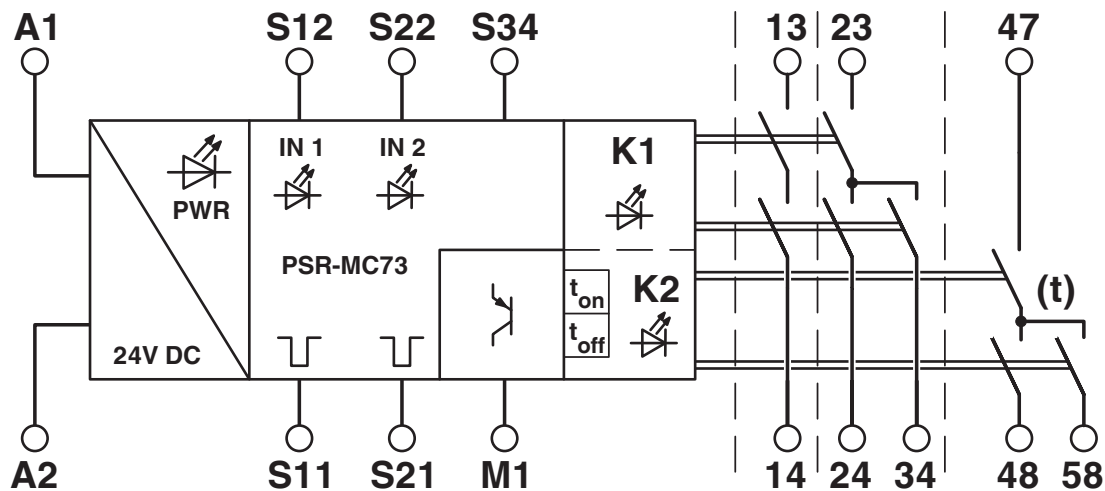

Block diagram

Circuit diagram

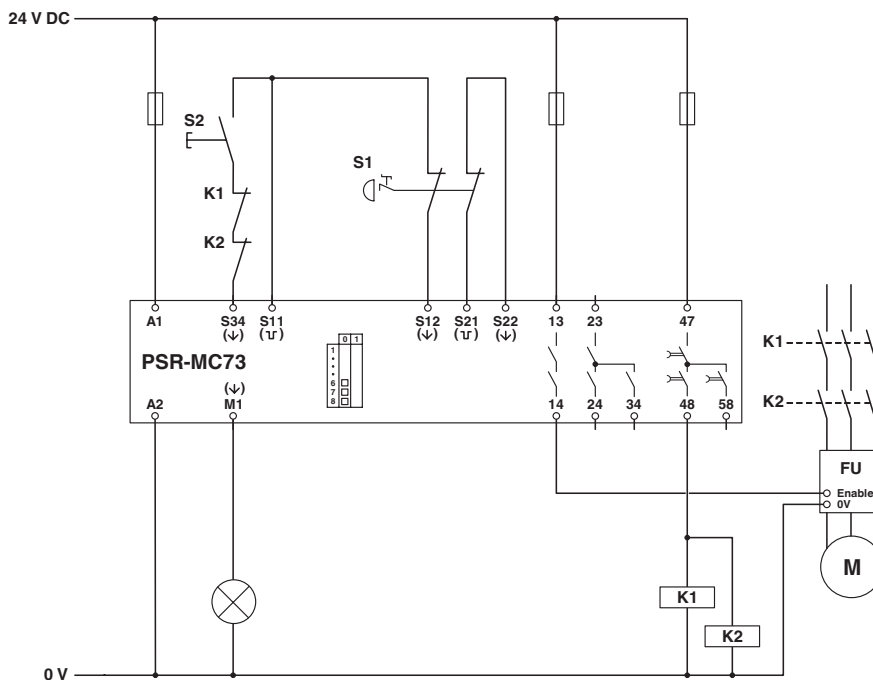



1015526


<https://www.phoenixcontact.com/ae/products/1015526>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ae/products/1015526>

 **UL Listed**
Approval ID: FILE E 140324

 **cUL Listed**
Approval ID: FILE E 140324

 **EAC**
Approval ID: RU*-DE*B.00606/20

 **Functional Safety**
Approval ID: 01/205/5486.01/19

cULus Listed

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Classifications

ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

ETIM

ETIM 8.0	EC001449
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

1015526

<https://www.phoenixcontact.com/ae/products/1015526>

Accessories

CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/ae/products/1734634>

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



CR-MSTB - Coding section

1734401

<https://www.phoenixcontact.com/ae/products/1734401>

Coding section, inserted into the recess in the header or the inverted plug, red insulating material



PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/ae/products/1015526>

CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/ae/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Middle East FZ LLC
1201N-1206N, Dubai Science Park Towers – North
P.O. Box 345002, Dubai, United Arab Emirates
(+971) 4 437-0324
info-me@phoenixcontact.com