


Data Sheet | Item Number: 787-1211

Switched-mode power supply; Compact; 1-phase; 12 VDC output voltage; 5 A output current; DC-OK LED

<https://www.wago.com/787-1211>

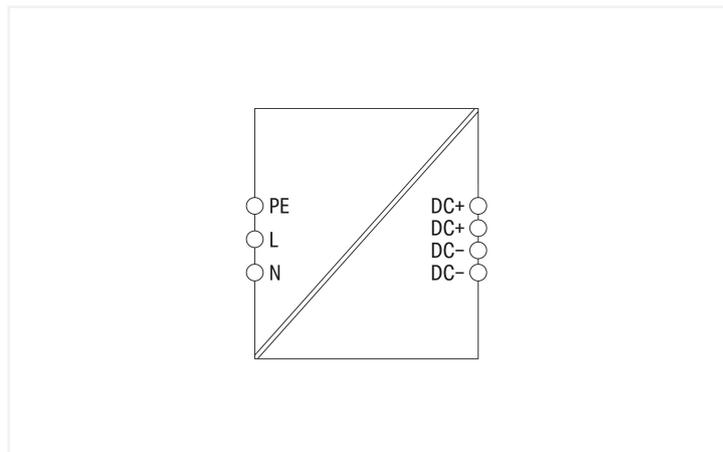

Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Removable front panel and screw mounts for alternative installation in distribution boxes or devices
- Pluggable *picoMAX*® Connection Technology (tool-free)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204

Technical data

Input		Output	
Phases	1	Nominal output voltage $U_{o, nom}$	12 VDC (SELV)
Nominal input voltage $U_{i, nom}$	1 x 100 ... 240 VAC; 140 ... 340 VDC	Output voltage range	10 ... 14 VDC (adjustable)
Input voltage range	1 x 85 ... 264 VAC; 125 ... 375 VDC	Default Setting	12 VDC
Input voltage derating	-2 %/V (< 100 VAC); -1.33 %/V (< 140 VDC)	Nominal output current $I_{o, nom}$	5 A
Nominal mains frequency range	47 ... 63 Hz; 0 Hz	Nominal output power	60 W
Input current I_i	≤ 0.6 A	Deviation	≤ 1 %
Discharge current	≤ 0.25 mA	Deviation, dynamic load change 10 ... 90 %	≤ 1 %
Inrush current	≤ 30 A (NTC)	Residual ripple	≤ 100 mV (peak-to-peak)
Power factor	≥ 0.5	Overload behavior	Constant power (in overload range: 1.22 ... $1.7 \times I_{o, nom}$); Hiccup in the event of a short circuit or permanent overload
Power factor correction (PFC)	Passive		
Mains failure hold-up time	≥ 600 ms (230 VAC); ≥ 12 ms (110 VAC)		

Signaling and Communication

Signaling	1 x DC OK LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/Power Losses

Power loss P_I	≤ 0.6 W
Power loss (max.) $P_{I(max)}$	9 W (100 VAC / 12 VDC; 2.5 A)
Efficiency (typ.)	88.5 % (230 VAC; nominal load); 87.5 % (110 VAC; nominal load)

Circuit Protection

Internal fuse	T 3.15 A / 250 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: 6 A, 10 A or higher; Tripping characteristic: B

Safety and protection

Isolation voltage (pri.-sec.)	4.242 kVDC
Isolation voltage (pri.-PE)	2.12 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Resistance to reverse feed	≤ 16 VDC
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	≤ 20 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes, for devices of the same type
Series operation	Yes, for 2 devices of the same type
MTBF	> 500,000 h (per IEC 61709)

Connection Data

Cable length (max.)	30 m
Connection 1	
Connection type	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	72 mm / 2.835 inches
Height	90 mm / 3.543 inches
Depth	56 mm / 2.205 inches
Depth from upper-edge of DIN-rail	52.5 mm / 2.067 inches
Note (dimensions)	Depth: 48 mm (without cover)

Mechanical data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail Screw mount (back/side)

Material data

Flammability class per UL94	V0
Fire load	0 MJ
Weight	63 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	20 ... 90 % (no condensation permissible)
Derating	-3 %/K (> 45 °C and U _i = 90 VAC); -2.3 %/K (> 50 °C and U _i = 230 VAC)
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143804226
Customs tariff number	85044083900

Product Classification

UNSPSC	39121004
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc.	UL 508	E255817

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1211



Documentation

Manual

Product Manual DC Power Supply, 12 V	V 1.1.0 29.06.2020	pdf 3916.69 KB	
--------------------------------------	-----------------------	-------------------	--

Bid Text

787-1211	04.07.2019	xml 7.48 KB	
787-1211	12.06.2019	docx 20.96 KB	

Instruction Leaflet

Stromversorgung COMPACT	V 1.2.0 18.08.2020	pdf 2661.69 KB	
-------------------------	-----------------------	-------------------	--

CAD/CAE-Data

CAD data

2D/3D Models 787-1211	
-----------------------	--

CAE data

EPLAN Data Portal 787-1211	
----------------------------	--

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Gripping plate



[Item No.: 2092-1601](#)

Gripping plate; for female and male connectors; 1 part; Pin spacing 5 mm; 3- to 4-pole; light gray

1.1.2 Tool

1.1.2.1 Operating tool



[Item No.: 210-720](#)

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



[Item No.: 210-769](#)

SCREWDRIVER; green

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com