
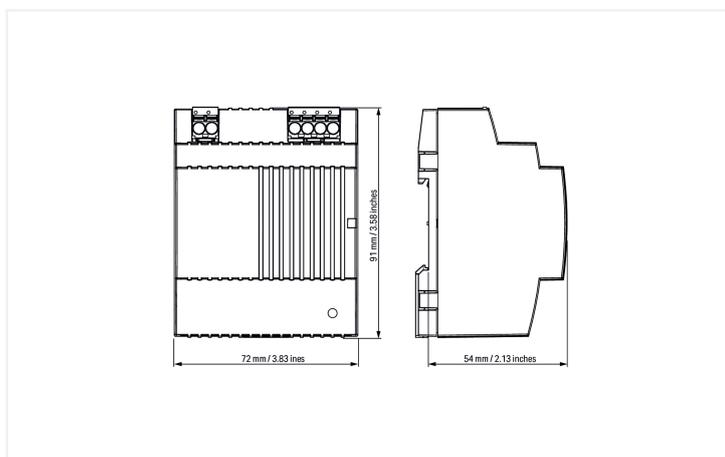


Data Sheet | Item Number: 787-1112

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED

<https://www.wago.com/787-1112>

DISCONTINUED:
01.05.2022

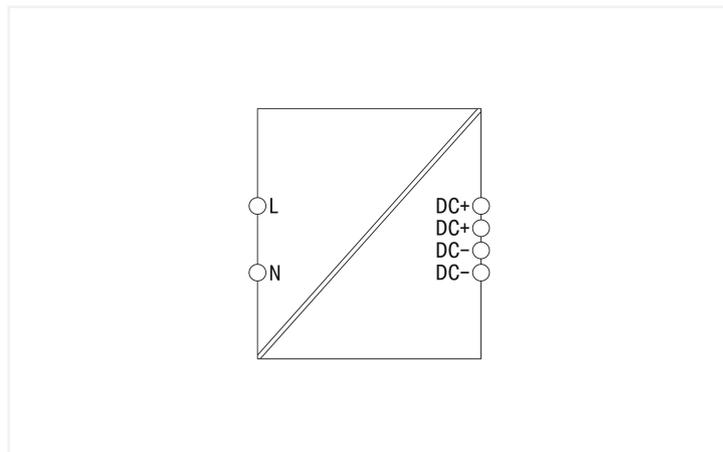

Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Pluggable *picoMAX*® Connection Technology (tool-free)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 61010-2-201/UL 60950-1; PELV per EN 60204

Technical data

Input	
Phases	1
Nominal input voltage $U_{i, nom}$	1 x 100 ... 240 VAC
Input voltage range	1 x 85 ... 264 VAC; 120 ... 300 VDC
Input voltage derating	$I_o \leq 2 \text{ A}$ (< 100 VAC); $I_o \leq 1.8 \text{ A}$ (< 90 VAC)
Nominal mains frequency range	44 ... 66 Hz; 0 Hz
Input current I_i	$\leq 0.6 \text{ A}$ (230 VAC); $\leq 1.4 \text{ A}$ (110 VAC)
Discharge current	$\leq 1 \text{ mA}$
Inrush current	$\leq 30 \text{ A}$ (NTC)
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 80 \text{ ms}$ (230 VAC); $\geq 10 \text{ ms}$ (110 VAC)

Output	
Nominal output voltage $U_{o, nom}$	24 VDC (SELV)
Output voltage range	22.8 ... 26.4 VDC (adjustable)
Default Setting	24 VDC
Nominal output current $I_{o, nom}$	2.5 A (24 VDC); 1.6 A (in any mounting position)
Nominal output power	60 W
Deviation	$\leq 2 \%$
Residual ripple	$\leq 100 \text{ mV}$ (peak-to-peak)
Current limitation	$1.1 \times I_{o, nom}$ (typ.)
Overload behavior	Constant current

Signaling and Communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/Power Losses

Power loss P_I	$\leq 2.2 \text{ W}; \leq 8.5 \text{ W (230 VAC; nominal load)}$
Power loss (max.) $P_{I(\text{max})}$	10.5 W (100 VAC / 24 VDC; 2.5 A)
Efficiency (typ.)	88 %

Circuit Protection

Internal fuse	T 2 A / 250 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: 6 A, 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	4.242 kVDC
Protection class	II
Protection type	IP20; per EN 60529
Resistance to reverse feed	$\leq 30 \text{ VDC}$
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	$\leq 40 \text{ VDC}$ (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection Data

Connection 1

Connection type	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	72 mm / 2.835 inches
Height	89 mm / 3.504 inches
Depth	59 mm / 2.323 inches
Depth from upper-edge of DIN-rail	55 mm / 2.165 inches

Mechanical data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail

Material data

Flammability class per UL94	V0
Fire load	0 MJ
Weight	240 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-25 ... +80 °C
Ambient temperature UL (operation at U _N)	-25 ... +55 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-3 %/K (> 45 °C)
Climatic category	3K3 (per EN 60721)

Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 60950-1 UL 508 DNV

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143422000
Customs tariff number	85044083900
End of Sale	2022-05-01
End of Production	2022-05-02
End of Delivery	2022-07-31
End of Service and Repair	2024-07-31

Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 508	E255817
UR Underwriters Laboratories Inc.	UL 60950-1	E255815

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339, Aug. 2021	TAA00000KT

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-1112 ↓

Documentation

Bid Text			
787-1112	24.06.2019	xml 6.94 KB	↓
787-1112	12.06.2019	docx 21.08 KB	↓

Instruction Leaflet		
Primär getaktete Stromversorgungen COMPACT	pdf 318.14 KB	↓

CAD/CAE-Data

CAE data

EPLAN Data Portal
787-1112



WSCAD Universe
787-1112



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Gripping plate



Item No.: 2092-1600

Gripping plate; for female and male connectors; 1 part; Pin spacing 5 mm; 2-pole; light gray

Item No.: 2092-1601

Gripping plate; for female and male connectors; 1 part; Pin spacing 5 mm; 3- to 4-pole; light gray

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Item No.: 210-769

SCREWDRIVER; green