



Data Sheet | Item Number: 787-602

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1.3 A output current

<https://www.wago.com/787-602>

DISCONTINUED:

01.09.2022

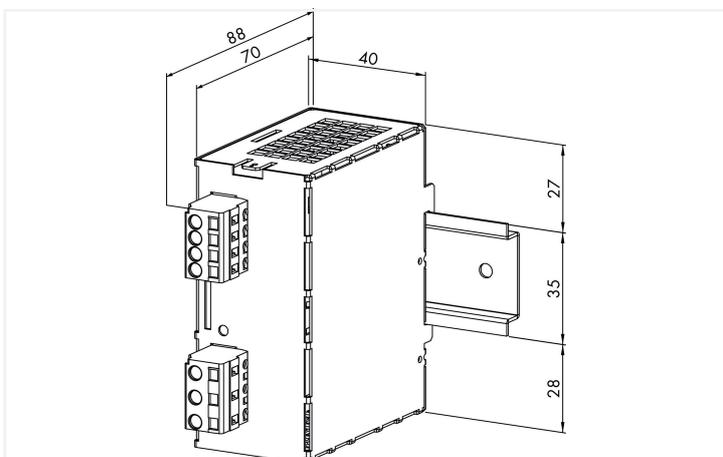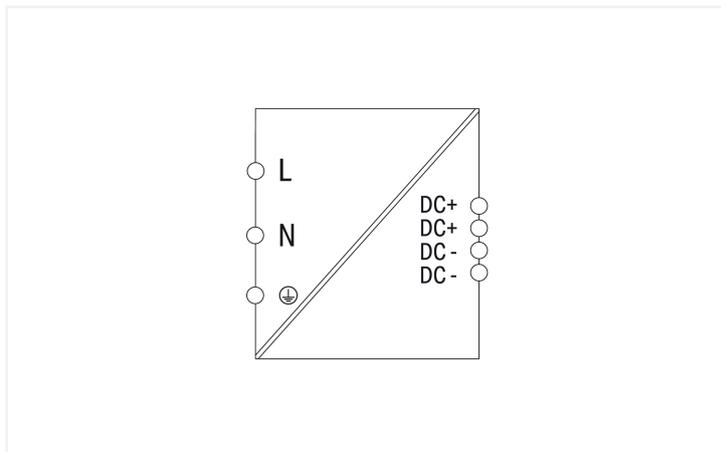

Dimensions in mm

Features:

- Switched-mode power supply
- Protection class I
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950

Technical data

Input	
Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x 100 ... 240 VAC; 140 ... 300 VDC
Input voltage range	1 x 90 ... 264 VAC; 130 ... 300 VDC
Nominal mains frequency range	50 ... 60 Hz; 0 Hz
Input current I_i	≤ 0.3 A (230 VAC)
Discharge current	≤ 0.9 mA
Inrush current	≤ 25 A
Power factor correction (PFC)	Passive
Mains failure hold-up time	≥ 20 ms (230 VAC)

Output	
Nominal output voltage $U_{o, \text{nom}}$	24 VDC (SELV)
Output voltage range	22 ... 28.8 VDC (adjustable)
Default Setting	24 VDC
Nominal output current $I_{o, \text{nom}}$	1.3 A (24 VDC)
Deviation	≤ 3 %
Residual ripple	≤ 100 mV (peak-to-peak)
Current limitation	$1.5 \times I_{o, \text{nom}}$ (typ.)
Overload behavior	Hiccup

Signaling and Communication

Operation status indicator	Green LED (24 V OK)
----------------------------	---------------------

Efficiency/Power Losses

Power loss P_I	≤ 4.9 W
Power loss (max.) $P_{I(max)}$	7 W (90 VAC / 24 VDC; 1.3 A)
Efficiency (typ.)	83 %

Circuit Protection

Internal fuse	T 2 A / 250 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: C10 or B10

Safety and protection

Isolation voltage (pri.-sec.)	4.242 kVDC
Isolation voltage (pri.-PE)	2.2 kVDC
Isolation voltage (sec.-PE)	0.7 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 30 VDC
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit ≤ 40 VDC (in the event of a fault)
Short-circuit-protected	Yes ("hiccup")
Open-circuit-proof	Yes
Parallel operation	No
Series operation	Yes

Connection Data

Note (conductor cross-section)	12 AWG: THHN, THWN
--------------------------------	--------------------

Connection 1

Connection type	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 231 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	40 mm / 1.575 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	95 mm / 3.74 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0 MJ
Weight	300 g

Environmental requirements

Ambient temperature (operation)	-10 ... +70 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	30 ... 85 % (no condensation permissible)
Derating	-3 %/K (> 50 °C)
Climatic category	3K3 (per EN 60721)

Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 60950-1 EN 61204-3 UL 60950 UL 508 DNV

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454435134
Customs tariff number	85044083900
End of Sale	2022-09-01
End of Production	2022-09-07
End of Delivery	2023-02-28
End of Service and Repair	2025-02-28

Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals **Declarations of conformity and manufacturer's declarations**



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 508	E255817
UR Underwriters Laboratories Inc.	UL 60950-1	E255815

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAA00002J6

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-602	↓
--	-------------------

Documentation

Bid Text

Item	Date	Format	Size	Action
787-602	13.06.2019	xml	6.70 KB	↓
787-602	13.06.2019	docx	19.85 KB	↓

Instruction Leaflet

Primär getaktete Stromversorgungen CLASSIC	pdf 177.87 KB	↓
--	------------------	-------------------

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 787-602 	EPLAN Data Portal 787-602 
	WSCAD Universe 787-602 
	ZUKEN Portal 787-602 